
# Data sheet | Item number: 260-405

Test plug module; with locking latches; modular; for 4-conductor terminal blocks; for 260 Series; gray





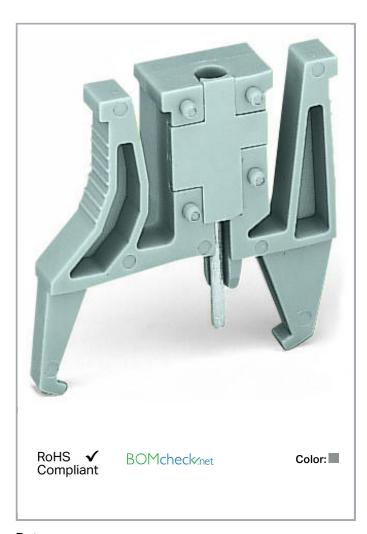

# Data Electrical data

Test voltage	48 V
Test current	0.5 A

## **Geometrical Data**

Width	8 mm / 0.315 inch
Module width	8 mm / 0.315 inch

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

# Data sheet | Item number: 260-405

www.wago.com/260-405



## **Material Data**

Color	gray
Weight	2.2 g

## Commercial data

Product Group	9 (Std. Chassis Mt. Blocks)
Packaging type	BOX
Country of origin	DE
GTIN	4050821868941
Customs Tariff No.	85369010000

## Counterpart

## Compatible products

#### **Test Accessories**

9	Item no.: 210-136 Test plug; 2 mm Ø; with 500 mm cable; red	www.wago.com/210-136
	Item no.: 210-137 Test plug; 2.3 mm Ø; with 500 mm cable; yellow	www.wago.com/210-137

# **Downloads**

# Documentation

#### **Additional Information**

Technical explanations	Apr 3, 2019	pdf	Download
		2.1 MB	

## CAD/CAE-Data

### CAE data

WSCAD Universe 260-405	URL	Download
------------------------	-----	----------

## **Installation Notes**

Subject to changes. Please also observe the further product documentation!


WAGO Kontakttechnik GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.


## Data sheet | Item number: 260-405

www.wago.com/260-405





Testing via test plug modules snapped onto a terminal strip – wired or unwired. As touch contact is made with the CAGE CLAMP® (spring steel) unit, this testing type is limited to maximum 0.5 A.



Testing after the conductors have been terminated.

Distance between locking devices must be approximately 35 ... 40 mm.

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$ 

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com