
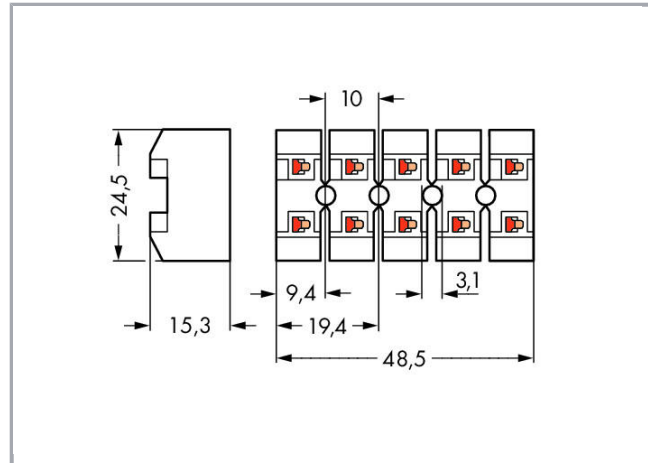


## Data sheet | Item number: 272-584

Power supply connector; 0,75 mm<sup>2</sup>; white

[www.wago.com/272-584](http://www.wago.com/272-584)

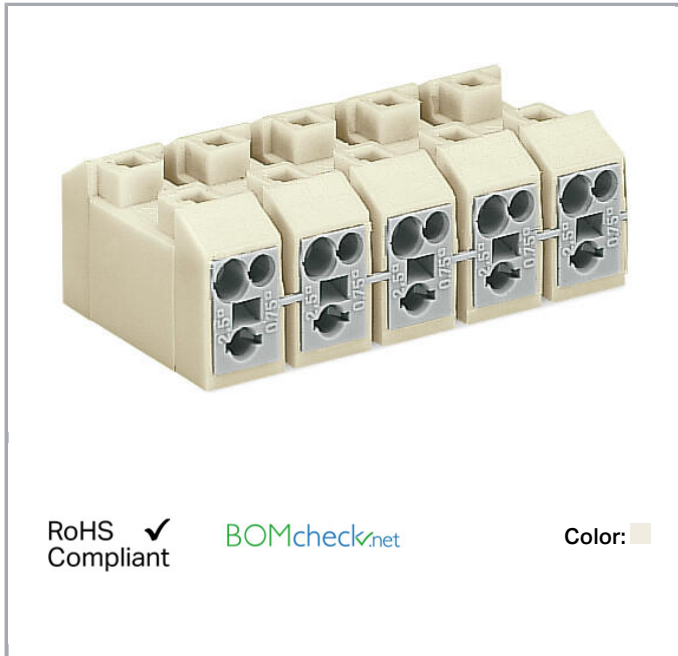

### Data

#### Electrical data

#### Ratings per IEC/EN 60664-1

Rated voltage (III / 2)	400 V
Rated impulse voltage (III / 2)	4 kV
Rated current	26 A
Legend (ratings)	(III / 2) ≙ Overvoltage category III / Pollution degree 2

#### Approvals per UL 1059

Approvals per	UL 1059
---------------	---------

#### Connection data

Connection technology	PUSH WIRE®
Strip length	8 ... 9 mm / 0.31 ... 0.35 inch
No. of poles	4

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

Total number of connection points	16
Total number of potentials	4
Number of connection types	1

### Geometrical Data

Width	38,5 mm / 1.516 inch
Height	15,3 mm / 0.602 inch
Depth	24,5 mm / 0.965 inch

### Material Data




Color	white
Fire load	0.191 MJ
Weight	11.9 g

### Commercial data

Packaging type	bag
Country of origin	DE
GTIN	4044918435826
Customs Tariff No.	85369010000

### Approvals / Certificates





#### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60998	NTR NL 7384
	CCA DEKRA Certification B.V.	EN 60998	2176190.01
	CSA DEKRA Certification B.V.	C22.2 No. 158	70048844


#### Ship Approvals

Certificate

Subject to changes. Please also observe the further product documentation!

Logo	Approval	Additional Approval Text	name
	<b>ABS</b> American Bureau of Shipping	-	18- HG1755093- PDA
	<b>BV</b> Bureau Veritas S.A.	EN 60998	11914/CO BV
	<b>DNV GL</b> Det Norske Veritas, Germanischer Lloyd	-	TAE000016Z
	<b>LR</b> Lloyds Register	IEC 61984	96/20035 (E5)


**UL-Approvals**

Logo	Approval	Additional Approval Text	Certificate name
	<b>UR</b> Underwriters Laboratories Inc.	UL 1059	20190731- E45172

**Counterpart**

**Compatible products**

**tools**

	<b>Item no.: 249-100</b> Operating tool; for terminal blocks with snap-in ground contact	<a href="http://www.wago.com/249-100">www.wago.com/249-100</a>
	<b>Item no.: 271-120</b> Push-button; for retrofitting; loose	<a href="http://www.wago.com/271-120">www.wago.com/271-120</a>

**assembling**

	<b>Item no.: 271-702</b> Pins; for plate thickness 1 mm	<a href="http://www.wago.com/271-702">www.wago.com/271-702</a>
--	--	--

Subject to changes. Please also observe the further product documentation!



Item no.: 271-711  
Pins; for plate thickness 1 mm

[www.wago.com/271-711](http://www.wago.com/271-711)



Item no.: 271-712  
Pins; for plate thickness 1.5 mm

[www.wago.com/271-712](http://www.wago.com/271-712)

## Downloads

### Documentation

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

## CAD/CAE-Data

### CAE data

EPLAN Data Portal 272-584	URL	Download
WSCAD Universe 272-584	URL	Download

## Installation Notes

Subject to changes. Please also observe the further product documentation!