

Data sheet | Item number: 279-482

Comb-style jumper bar; insulated; 2-way; IN = IN terminal block; gray

www.wago.com/279-482



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Data

Geometrical Data

Width	8 mm / 0.315 inch
Depth	3,89 mm / 0.153 inch

Material Data

Color	gray
Fire load	0.004 MJ
Weight	0.7 g

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4044918610346
Customs Tariff No.	85366990990

Counterpart

Compatible products

tools

	Item no.: 279-432 Operating tool; made of insulating material; 2-way	www.wago.com/279-432
--	---	--

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

Subject to changes. Please also observe the further product documentation!

CAD/CAE-Data

CAD data


2D/3D Models 279-482	URL	Download
----------------------	---------------------	--------------------------

CAE data

WSCAD Universe 279-482	URL	Download
------------------------	---------------------	--------------------------

Installation Notes

Jumpered

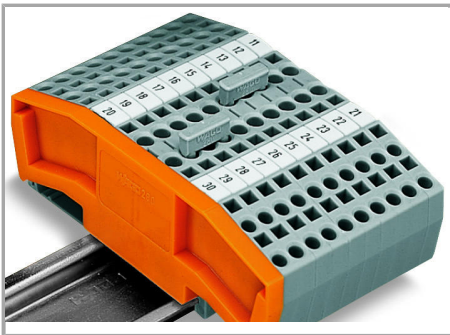


Commoning with comb-style jumper bar.

Push comb-style jumper bar down until fully inserted.

Jumpered


Subject to changes. Please also observe the further product documentation!

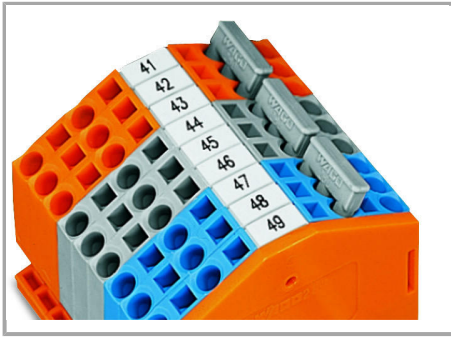

4-conductor through terminal blocks, angled type –

formation of groups with 3-way, comb-style jumper bars

Jumpered

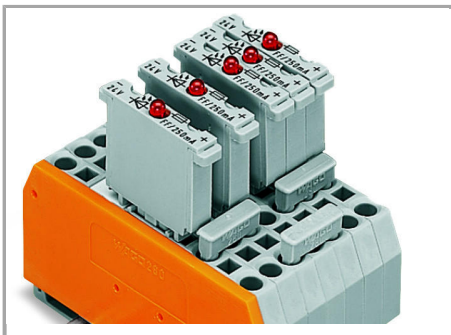


Carrier terminal blocks with component plugs,

alternate comb-style jumper bars,

3-way, comb-style jumper bar

Jumpered

Subject to changes. Please also observe the further product documentation!

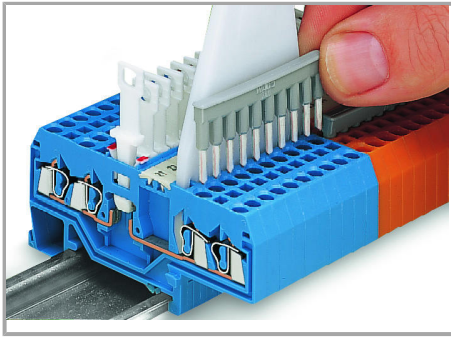

Commoning front-entry disconnect terminal blocks via comb-style jumper bar using a 10-pole operating tool.

Subject to changes. Please also observe the further product documentation!