


Data sheet | Item number: 706-2300/100-300

System cable; for Siemens S7-300; 2 x 16 digital inputs; Length: 3 m;

Conductor cross-section: 0.14 mm²

www.wago.com/706-2300/100-300

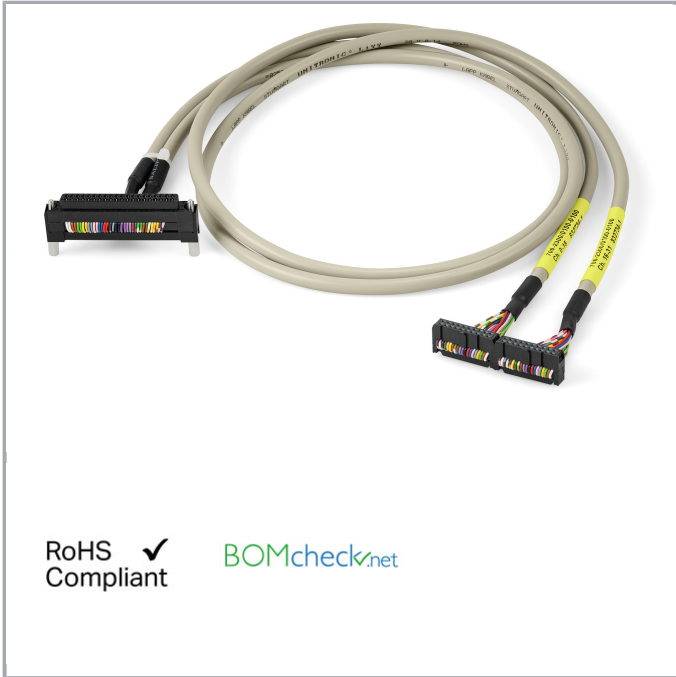

Item description

Note:

When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.

Data

Electrical Data

In-/Outputs	2 x 16 digital inputs
Operating voltage	≤ AC/DC 60 V
Max. current per conductor	1 A

Safety and protection:

Protection class	IP20
------------------	------

Connection data

Connection type (1)	System
---------------------	--------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Pluggable connector	Fujitsu FCN-367-J40
Connection type (2)	System
No. of poles 2	20
Pluggable connector 2	Pluggable connector per DIN 41651; female connector
Connection type (3)	System
No. of poles 3	20
Pluggable connector 3	Pluggable connector per DIN 41651; female connector
Type of cable	LiYY
Cross section of single conductor	0.14 mm ²
Color coding	per DIN VDE 47100

Geometrical Data

Cable length	3 m
--------------	-----

Material Data

Weight	504 g
--------	-------

Environmental Requirements

Surrounding air (operating) temperature	-20 ... 50 °C
---	---------------

Commercial data

Product Group	30 ()
Packaging type	0
Country of origin	FR
GTIN	4045454978822
Customs Tariff No.	85444290900

Counterpart

Compatible products

transfer module


Item no.: 289-614

 Interface module; Pluggable connector per DIN 41651; 20-pole; Triple-deck PCB terminal blocks; in mounting carrier; 2,50 mm²
www.wago.com/289-614
Item no.: 704-2004

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16-

www.wago.com/704-2004

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



channel digital input or output; 1-wire connection; in mounting carrier



Item no.: 704-2024

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16- channel digital input or output; 2-wire connection; in mounting carrier www.wago.com/704-2024



Item no.: 704-2044

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16- channel digital input or output; 2-wire connection; in mounting carrier www.wago.com/704-2044



Item no.: 704-2054

Interface module for system wiring; Pluggable connector per DIN 41651; Male connector; 20-pole; 16- channel digital input or output; 3-wire connection; in mounting carrier www.wago.com/704-2054

Downloads

Documentation

Additional Information

Disposal; Electrical and electronic equipment, Packaging	V 1.0.0	pdf 265.8 kB	Download
--	---------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 706-2300/100-300	URL	Download
---------------------------------	-----	----------

Installation Notes

Subject to changes. Please also observe the further product documentation!