



Data

Electrical data

Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Approvals per

UL 1059

Connection data

Number of connection types

1

Subject to changes. Please also observe the further product documentation!

Geometrical Data

| | |
|-------|--------------------|
| Width | 75 mm / 2.953 inch |
|-------|--------------------|

Mechanical data

| | |
|----------|--|
| Suitable | for 1-conductor male and female connectors |
|----------|--|

Material Data

| | |
|-------|------------|
| Color | light gray |
|-------|------------|

| | |
|-----------|----------|
| Fire load | 0.139 MJ |
|-----------|----------|

| | |
|--------|-------|
| Weight | 4.6 g |
|--------|-------|

Commercial data

| | |
|---------------|------------------------|
| Product Group | 3 (Multi Conn. System) |
|---------------|------------------------|

| | |
|----------------|-----|
| Packaging type | BOX |
|----------------|-----|


| | |
|-------------------|----|
| Country of origin | DE |
|-------------------|----|

| | |
|------|---------------|
| GTIN | 4045454163150 |
|------|---------------|

| | |
|--------------------|-------------|
| Customs Tariff No. | 85389099990 |
|--------------------|-------------|

Approvals / Certificates

Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|---|-----------------------|--------------------------|------------------|
|  | LR Lloyds Register | IEC 61984 | 96/20035 (E5) |

Counterpart

Downloads

Documentation


Additional Information

| | | | |
|------------------------|-------------|---------------|----------|
| Technical explanations | Apr 3, 2019 | pdf 3.6 MB | Download |
|------------------------|-------------|---------------|----------|

Subject to changes. Please also observe the further product documentation!

Installation Notes

Assembly

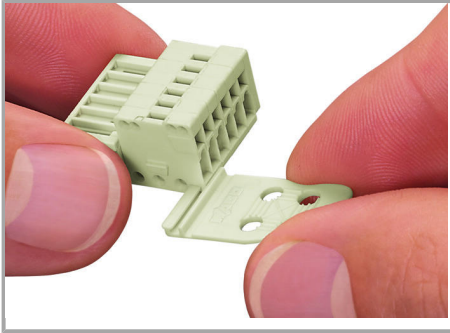

Strain relief plates for factory or in-the-field assembly.

Subject to changes. Please also observe the further product documentation!