

Item description

- Suitable for cable clamp
- 1 x cable outlet, rear

Data

Electrical data

Ratings per IEC/EN 60664-1

Legend (ratings)

(III / 2) ≙ Overvoltage category III / Pollution degree 2

Approvals per UL 1059

Approvals per

UL 1059

Connection data

No. of poles

8

Number of connection types

1

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

Geometrical Data

Pin spacing	3.81 mm / 0.15 inch
Width	33.5 mm / 1.319 inch
Height	14.4 mm / 0.567 inch
Depth	33.7 mm / 1.327 inch

Mechanical data

Suitable	for 1-conductor male and female connectors
----------	--

Material Data


Color	orange
Fire load	0.147 MJ
Weight	4.9 g

Commercial data

Product Group	3 (Multi Conn. System)
Packaging type	BOX
Country of origin	DE
GTIN	4017332548311
Customs Tariff No.	85389099990

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CB DEKRA Certification B.V.	EN 61984	NL-54190
	KEMA/KEUR DEKRA Certification B.V.	EN 61984	71- 105522

Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE000016Z

Subject to changes. Please also observe the further product documentation!



LR
Lloyds Register

IEC 61984

96/20035
(E5)

Counterpart

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 3.6 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data


CAE data

EPLAN Data Portal 734-638	URL	Download
---------------------------	-----	----------

Installation Notes


Application

Subject to changes. Please also observe the further product documentation!

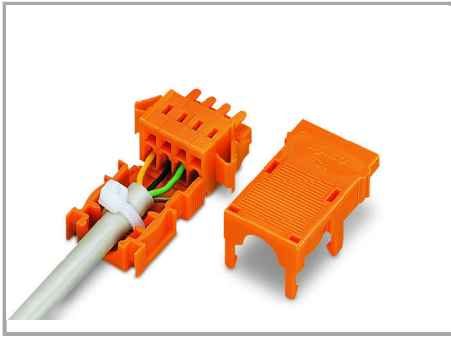

4-pole, 1-conductor female connector, with locking levers and strain relief housing (2- to 5-pole strain relief housing suitable only for cable ties)

Application

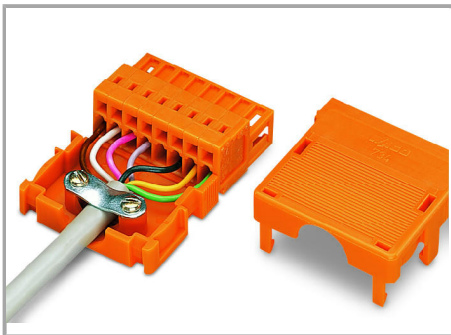

Strain relief housing for 734 Series Male and Female Connectors with CAGE CLAMP® connection.

Subject to changes. Please also observe the further product documentation!