


Data sheet | Item number: 756-5112/030-015


Sensor/Actuator cable; 3-pole; Length: 1.5 m

www.wago.com/756-5112/030-015

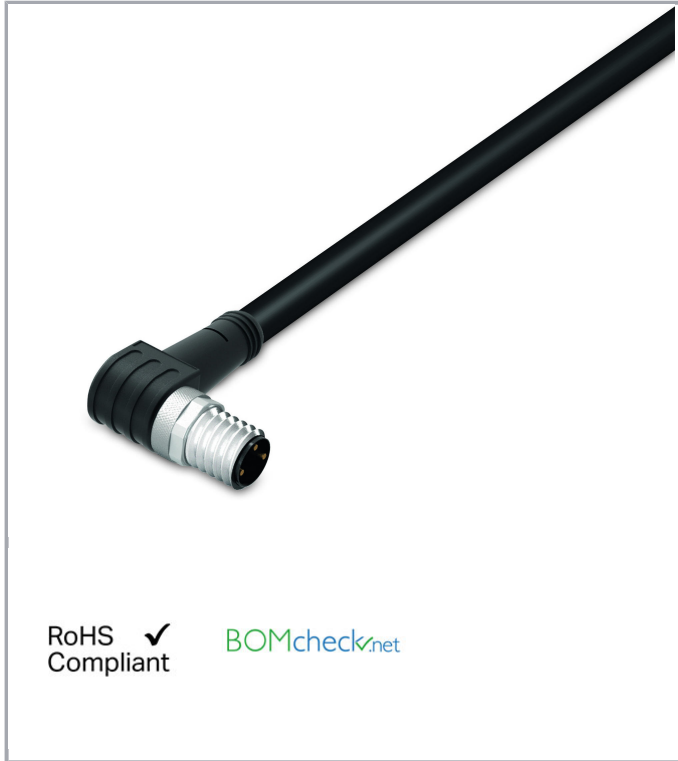

RoHS 
Compliant



[BOMcheck.net](https://www.bomcheck.net)

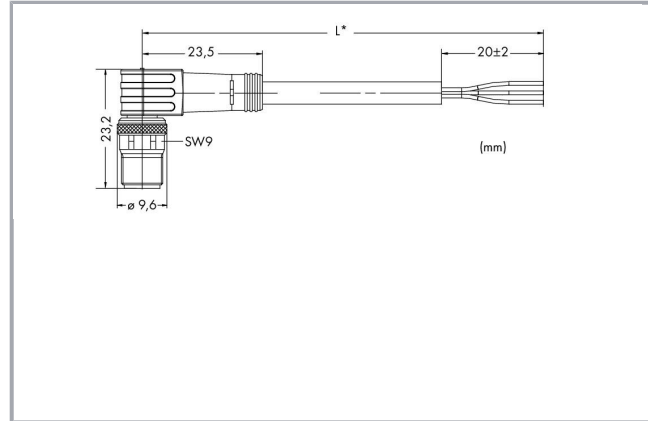

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

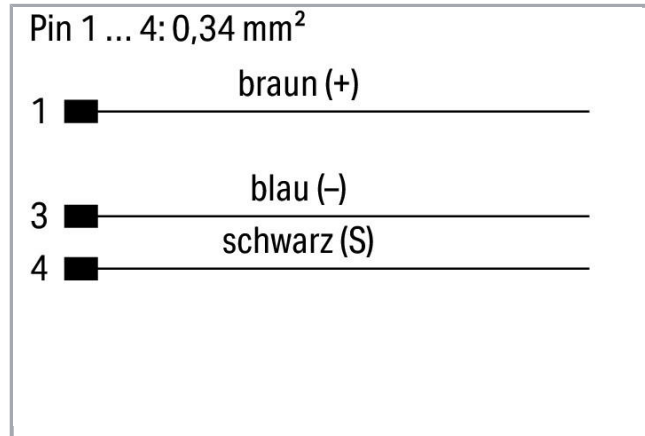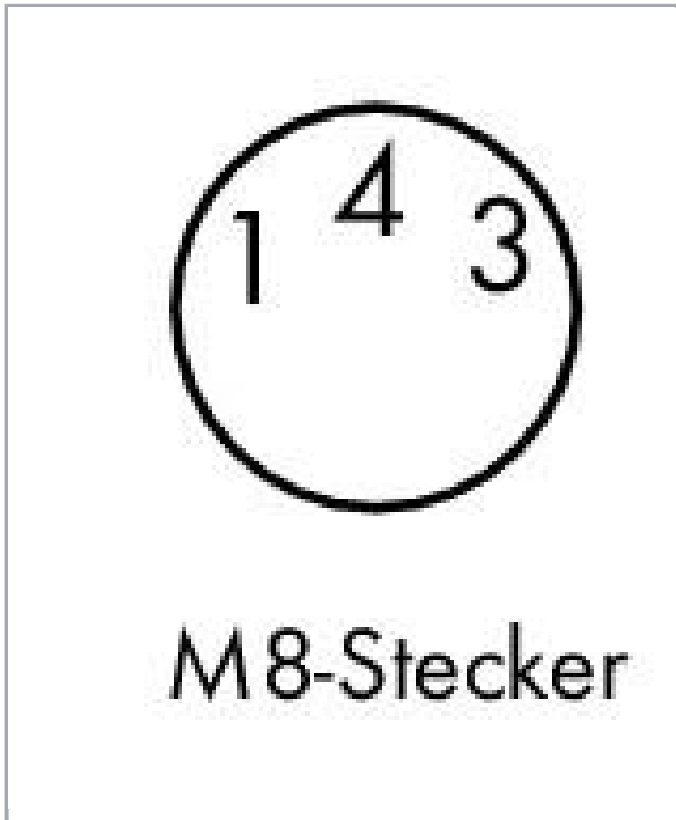

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- Good resistance to microbes, hydrolysis, oil, chemicals and UV radiation.
- Good chemical resistance.
- Cable used: UL listed

Data

Technical Data

| | |
|---|--------------------|
| Connection type | M8 plug - free end |
| No. of poles | 3 |
| Leitungsanschlussrichtung zur Steckrichtung | 90° |
| Cable length | 1.5 m |
| Operating voltage | AC/DC 60 V |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



| | |
|---------------------|--------|
| Operating current | 4 A |
| Rated surge voltage | 1,5 kV |

Mechanical data

| | |
|---------------------------|--|
| Bending cycles | 2 Mio. |
| Schleppkettentauglichkeit | yes |
| Color of sheathed cable | black |
| Cable diameter | 3.9 ... 4.3 mm |
| Sheath material | Polyurethane (OPUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing |
| Halogen-free | Yes |
| Housing material | Polyurethan (PUR) |
| Contact material | CuSn |
| Contact plating | CuNi/Au |
| Tightening torque | 0.6 Nm |
| Weight | 45 g |

Environmental Requirements

| | |
|--------------------------------------|--------------------|
| Umgebungstemperatur (Betrieb) bewegt | -25 ... +90 °C |
| Umgebungstemperatur (Betrieb) ruhend | -50 ... +90 °C |
| Protection class | IP67 |
| Degree of pollution (5) | 3 acc. to VDE 0110 |

Commercial data

| | |
|--------------------|---------------|
| Packaging type | BOX |
| Country of origin | HU |
| GTIN | 4045454941963 |
| Customs Tariff No. | 85444290900 |

Counterpart

Downloads

Documentation

System Description

| | | |
|--------------------------------------|-----------------|----------|
| IP67 Cables and Pluggable Connectors | pdf 293.9 kB | Download |
|--------------------------------------|-----------------|----------|

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



CAD/CAE-Data

CAE data

WSCAD Universe 756-5112/030-015

URL

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.