


Data sheet | Item number: 756-5312/090-015

Sensor/Actuator cable; 8-pole; Length: 1.5 m


www.wago.com/756-5312/090-015

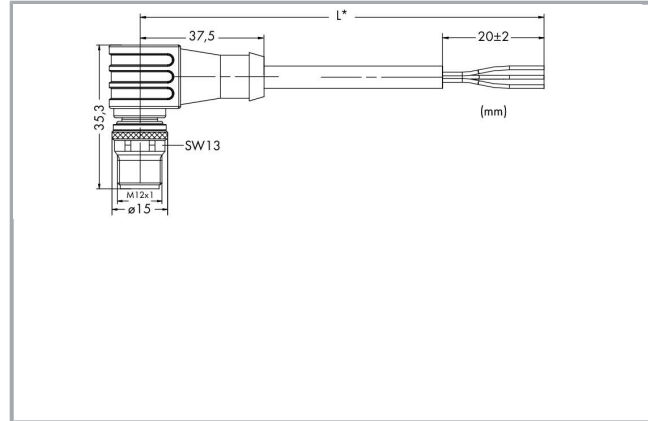

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

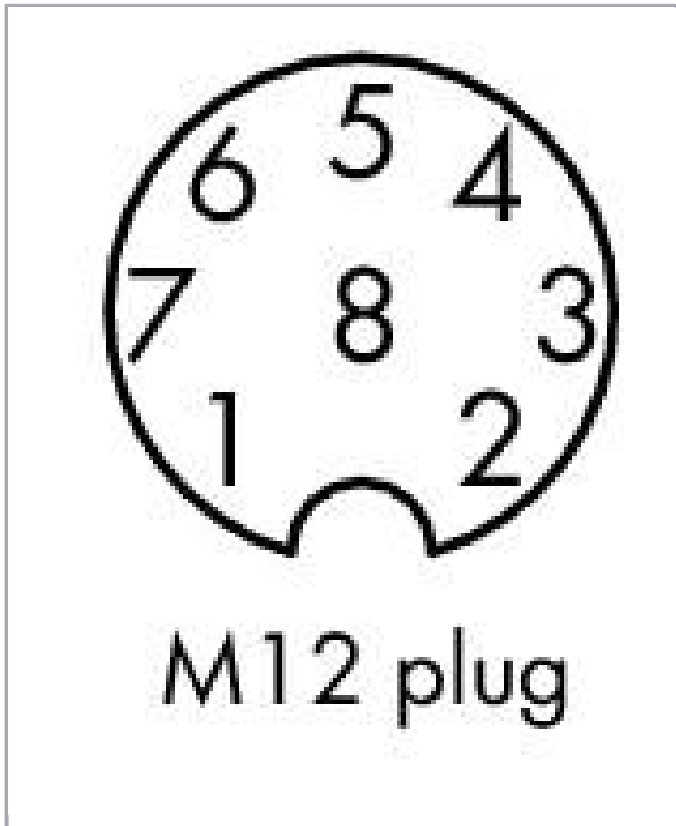

| Pin 1 ... 8: 0,25 mm ² | |
|-----------------------------------|-------|
| 1 | weiß |
| 2 | braun |
| 3 | grün |
| 4 | gelb |
| 5 | grau |
| 6 | rosa |
| 7 | blau |
| 8 | rot |
| ----- Schirm | |

Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical Data

| | |
|--|---------------------|
| Connection type | M12 plug - free end |
| No. of poles | 8 |
| Anschlusspunkt geschirmt | yes |
| Leistungsanschlussrichtung zur Steckrichtung | 90° |
| Steckgesichtskodierung Leitung/Adapter 1 1 | A-coded |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



| | |
|---------------------|------------|
| Cable length | 1.5 m |
| Operating voltage | 250 VAC/DC |
| Operating current | 4 A |
| Rated surge voltage | 1.5 kV |

Mechanical data

| | |
|---------------------------|--|
| Bending cycles | 2 Mio. |
| Schleppkettentauglichkeit | yes |
| Color of sheathed cable | black |
| Cable diameter | 6,1 ... 6,5 mm |
| Sheath material | Polyurethane (OPUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing |
| Halogen-free | Yes |
| Housing material | Polyurethane (PUR) |
| Contact material | CuSn |
| Contact plating | CuNi/Au |
| Tightening torque | 1 Nm |
| Weight | 108 g |

Environmental Requirements

| | |
|--------------------------------------|----------------|
| Umgebungstemperatur (Betrieb) bewegt | -25 ... +90 °C |
| Umgebungstemperatur (Betrieb) ruhend | -50 ... +90 °C |
| Protection class | IP67 |
| Degree of pollution (5) | 3 per VDE 0110 |

Commercial data

| | |
|--------------------|---------------|
| Packaging type | BOX |
| Country of origin | HU |
| GTIN | 4050821346357 |
| Customs Tariff No. | 85444290900 |

Counterpart

Downloads

Documentation

System Description

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



IP67 Cables and Pluggable Connectors

pdf
293.9 kB

Download

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.