


Data sheet | Item number: 762-4104

Touch Panel 600; 25.7 cm (10.1"); 1280 x 800 pixels; 2 x USB, 2 x ETHERNET;
Web Panel





www.wago.com/762-4104

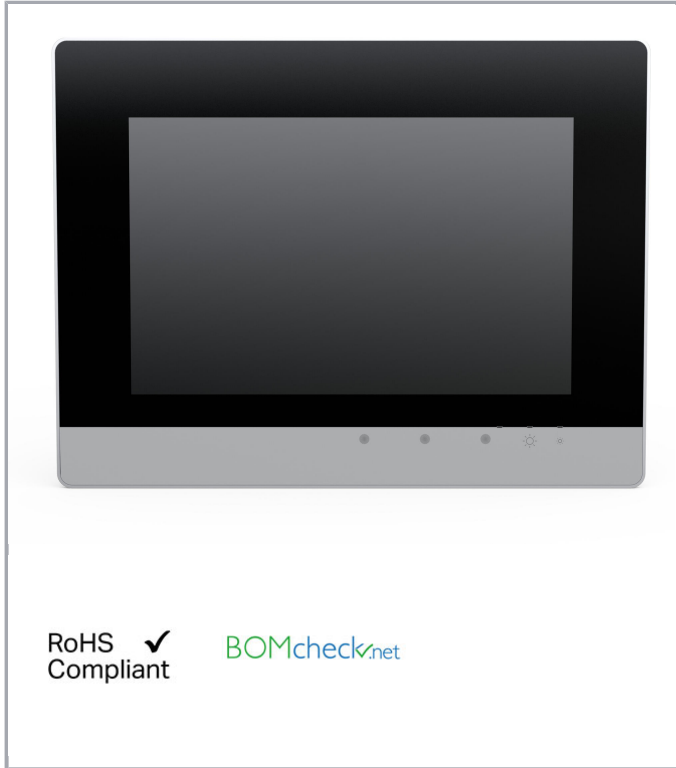

RoHS
Compliant ✓

BOMcheck.net

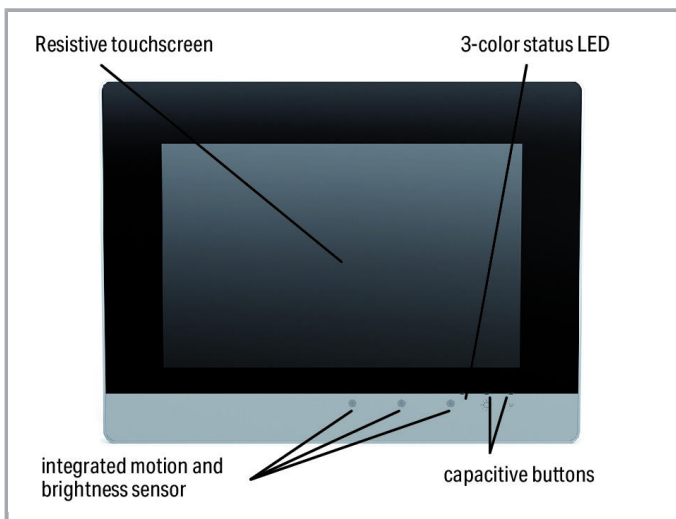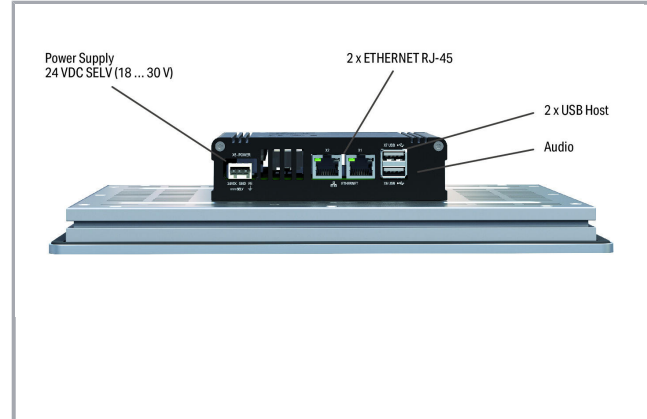

Item description

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

PIO1 hardware configuration

- 2 x ETHERNET port for connecting to field devices and the engineering tool
- 2 x USB port for optional connection of a USB stick, mouse or keyboard

Data**Technical Data**

Display diagonal	25,7 cm (10.1 Inches)
Display	Resistive touchscreen
Display colors	16 million colors
Graphics resolution	(1280 x 800) px
Visualization	Webserver
Ethernet protocol	DHCP DNS FTP FTPS HTTP HTTPS SSH
Communication	Web browser (HTML5)
Operating system	Real-time Linux (with RT-Preempt patch)
Processor	ARM [®] Cortex™ A9
Main memory (RAM)	2,048 MB
Internal memory (flash)	4096 MB
Type of memory card	microSD (max. 2 GB); microSDHC (max. 32 GB)
Indicators	five LEDs
Panel	Resistive touch panel, two capacitive keys, proximity sensor
Supply voltage	SELV DC 24 V (18 ... 31,2 V); with reverse voltage protection

Connection data

Connection technology: communication/fieldbus	Web browser: 2 x RJ-45; 2 x USB 2.0 host (type A)
---	---

Geometrical Data

Width	293 mm / 11.535 inch
Height	223 mm / 8.78 inch
Depth	58 mm / 2.283 inch
Panel cutout (W x H)	(278 x 208) mm

Subject to changes. Please also observe the further product documentation!

Mechanical data

Weight	1509 g
--------	--------

Environmental Requirements


Surrounding air (operating) temperature	0 ... 55 °C
Surrounding air (storage) temperature	-20 ... 80 °C
Protection class	IP65
Note on protection class	IP65 (front side); IP20 (rear side), per EN 60529
Relative air humidity (no condensation)	90 %
Mounting type	Clamping elements (included) or VESA mount (4 x M4x8)

Commercial data


Packaging type	BOX
Country of origin	DE
GTIN	4055143825061
Customs Tariff No.	8471410000

Approvals / Certificates

Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	KC National Radio Research Agency	Article 58-2, Clause 3	MSIP- REM-W43- WBP762

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Counterpart

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.

Compatible products

assembling



Item no.: 762-9001
e!DISPLAY7300T ; Clamping elements (4 pieces)

www.wago.com/762-9001

memory card



Item no.: 758-879/000-3102
Memory Card SD Micro; 2 GByte

www.wago.com/758-879/000-3102



Item no.: 758-879/000-3108
Memory Card SD Micro; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C

www.wago.com/758-879/000-3108

Downloads

Documentation

Manual

WAGO Touch Panel 600 Standard Line	1.1.0 Jul 25, 2019	pdf 2.7 MB	Download
---------------------------------------	-----------------------	---------------	----------

System Description

Touch Panel 600, system description		pdf 727.2 kB	Download
-------------------------------------	--	-----------------	----------

Runtime Software

Firmware

Firmware: 762-4104 Touch Panel 600; 25.7 cm (10.1"); 1280 x 800 pixels; 2 x USB, 2 x ETHERNET; Web Panel	15 Dec 9, 2019	zip 150.6 MB	Download
---	-------------------	-----------------	----------

Installation Notes

Product family

Standard Line
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!