



## Data sheet | Item number: 774-9373/1566-605

pre-assembled adapter cable; Cca; Socket/plug MIDI; 3-pole; Cod. S; 6 m;  
1,50 mm<sup>2</sup>; brown

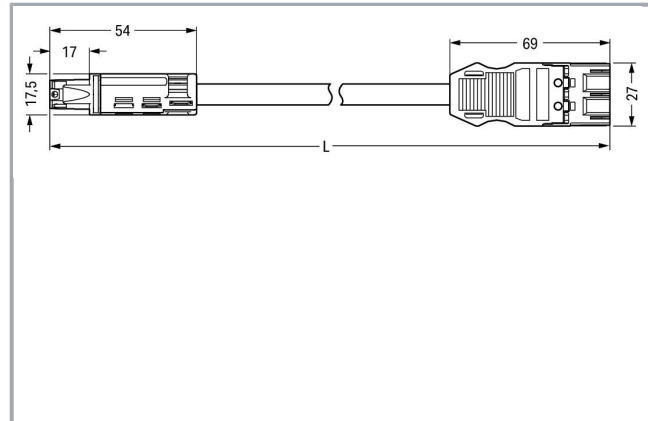

[www.wago.com/774-9373/1566-605](http://www.wago.com/774-9373/1566-605)

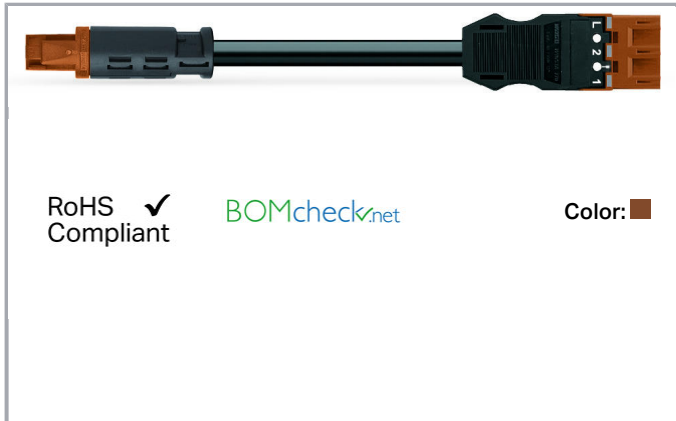

### Item description

- For round conduits and ducts
- 3- and 4-pole preassembled cables with 17.5 mm outer diameter for easy plug & play
- Plug-in integration into the electrical installation of hollow-wall boxes via adapter, for example

### Note:

Cables with a different fire class can be found in the eShop.

### Note on mismatching protection:

All WINSTA<sup>®</sup> components are 100% protected against mismatching when:

- a.) plugging different numbers of poles
- b.) plugging while incorrectly rotated
- c.) plugging while laterally staggered

### Data

#### Electrical data

Note on Contact Resistance

approx. 1 m $\Omega$  of contact resistance approx. 0.25 m $\Omega$  contact transition plug/socket

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Ratings per IEC/EN 60664-1

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Ratings per                     | IEC/EN 60664-1                                            |
| Rated voltage (III / 3)         | 250 V                                                     |
| Rated impulse voltage (III / 3) | 4 kV                                                      |
| Rated current                   | 16 A                                                      |
| Legend (ratings)                | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

## Connection data

|                       |                       |
|-----------------------|-----------------------|
| Conductor preparation | tip-bonded            |
| Cable diameter        | 7,4 ... 9,4 mm        |
| Connection type       | RD socket - MIDI plug |

## Mechanical data

|                                         |                                                                                                           |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Retention force of a plug-in connection | when locked: > 80N                                                                                        |
| Number of mating cycles                 | 200, without resistive load<br>100, with resistive load $I_N = 20$ A, tested (2.5mm <sup>2</sup> /AWG 14) |
| Connection type                         | RD socket - MIDI plug                                                                                     |
| Note on protection class                | Only when mated (these compact connectors are not designed for use in open, easily accessible areas).     |
| Application                             | Switching function                                                                                        |

## Material Data

|                  |                                          |
|------------------|------------------------------------------|
| Color            | brown                                    |
| Contact material | Copper or copper alloy (surface-treated) |

## Environmental Requirements

|                                        |                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Processing temperature                 | -5 ... +40 °C                                                                                             |
| Continuous operating temperature       | -35 ... +85 °C                                                                                            |
| Note on Continuous Service Temperature | PVC cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

Subject to changes. Please also observe the further product documentation!



## Commercial data

Packaging type not packed

---

## Counterpart

## Installation Notes

## Product family

*WINSTA*® RD

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.