


Data sheet | Item number: 870-435

Push-in type jumper bar; insulated; from 1 to 5; Nominal current 18 A; light gray

www.wago.com/870-435

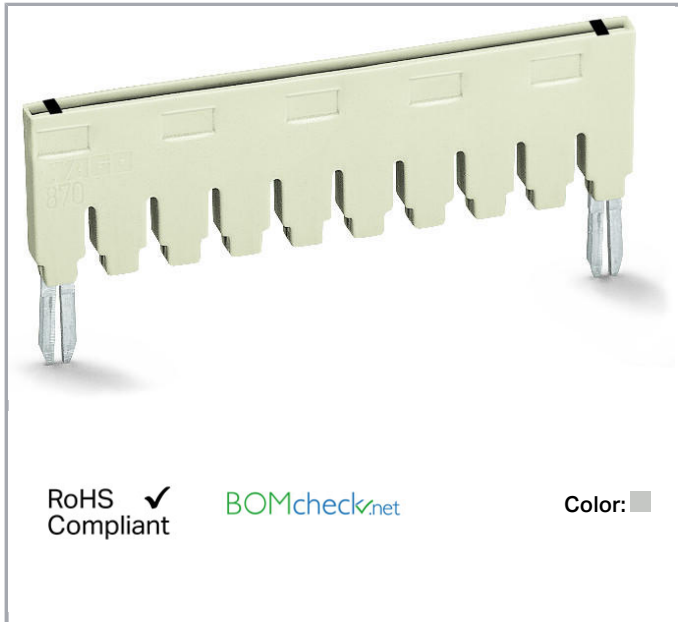

Data

Electrical data

Ratings per IEC/EN 60664-1

Rated current	18 A
---------------	------

Approvals Ex

Rated current (Ex e II)	13.5 A
-------------------------	--------

Geometrical Data

Width	24 mm / 0.945 inch
Depth	2.5 mm / 0.098 inch

Material Data

Color	light gray
Fire load	0.025 MJ

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Weight	1.6 g
--------	-------

Commercial data

Packaging type	BOX
Country of origin	DE
GTIN	4044918508629
Customs Tariff No.	85366990990

Counterpart

Downloads

Documentation

Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

CAD/CAE-Data

CAD data

2D/3D Models 870-435	URL	Download
----------------------	-----	----------

CAE data

WSCAD Universe 870-435	URL	Download
------------------------	-----	----------



Installation Notes

Jumpered

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

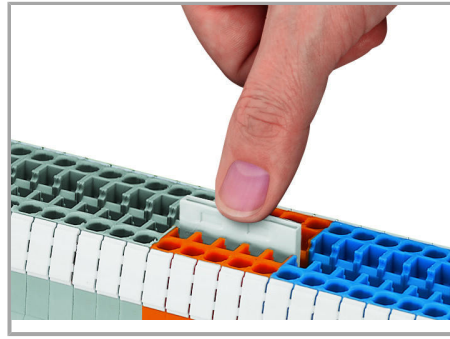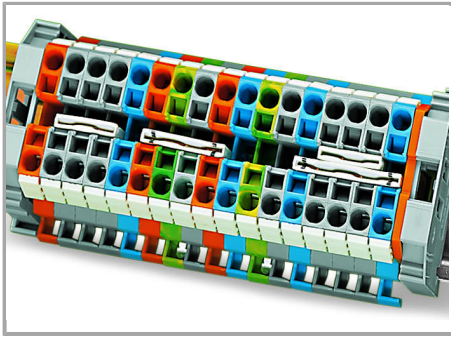

Commoning with push-in type jumper bars:

Two parallel jumper slots are accommodated in one terminal block.

Push jumper bars down firmly until fully inserted. When using multipole bars, push alternately on the right and then left side, until installed.

Push-in type jumper bars 1 – 3 – 5 – 7 or
1 – – 4 – – 7

upon request

Subject to changes. Please also observe the further product documentation!