
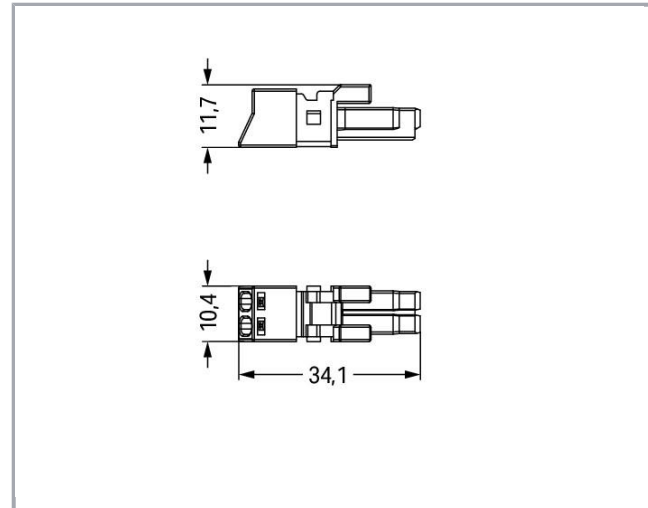


Data sheet | Item number: 890-262

Socket; 2-pole; Cod. B; 1,50 mm²; light green

www.wago.com/890-262

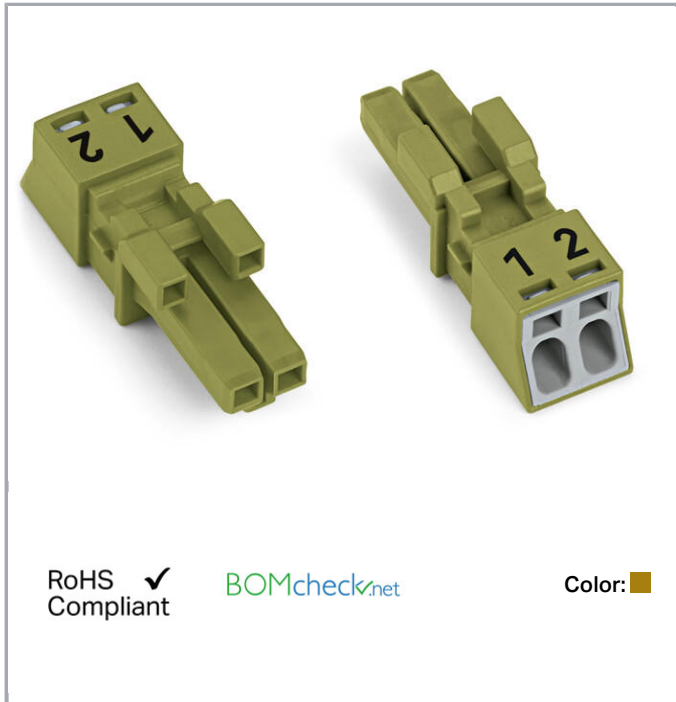

Item description

- Protected against mismatching and maintenance-free
- Push-in CAGE CLAMP® spring pressure connection technology allows solid conductors to be simply pushed into a unit
- Compact design with 4.4 mm pole spacing
- Components can be clearly printed on and color-coded to meet custom requirements
- When assembled, the installation connectors complies with IP40 and are suitable for easily accessible areas

Note:

All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug /socket).

Note on mismatching protection:

All WINSTA® components are 100% protected against mismatching when:

- a.) plugging different numbers of poles
- b.) plugging while rotated 180
- c.) plugging while laterally staggered
- d.) plugging one pole

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

**Safety information 1:**

Application note for the U.S. market (USR): Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 5 A and voltages up to 600 V. For further information, please contact your local sales office.

Data**Electrical data**

| | |
|----------------------------|---|
| Note on Contact Resistance | approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/socket |
|----------------------------|---|

Ratings per IEC/EN 60664-1

| Ratings per | IEC/EN 60664-1 |
|---------------------------------|---|
| Rated voltage (III / 3) | 250 V |
| Rated impulse voltage (III / 3) | 4 kV |
| Rated current | 16 A |
| Legend (ratings) | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

Approvals per UL 1977

| | |
|---|-------|
| Rated voltage per UL 1977 (factory wiring only) | 600 V |
| Rated current per UL 1977 (factory wiring only) | 14 A |

Connection data

| | |
|---|---|
| Connection technology | Push-in CAGE CLAMP® |
| Actuation type | Operating tool Push-in |
| Nominal cross section | 1,5 mm ² |
| Solid conductor | 0,25 ... 1,5 mm ² / 22 ... 16 AWG |
| Solid conductor, push-in termination | 0,75 ... 1,5 mm ² / 20 ... 16 AWG |
| Stranded conductor | 0,25 ... 1 mm ² / 22 ... 18 AWG |
| Fine-stranded conductor | 0,25 ... 1,5 mm ² / 22 ... 16 AWG |
| Fine-stranded conductor with ferrule with plastic collar | 0,25 ... 0,75 mm ² / 22 ... 20 AWG |
| Fine-stranded conductor with ferrule without plastic collar | 0,25 ... 0,75 mm ² / 22 ... 20 AWG |
| Fine-stranded conductor with ferrule, push-in termination, from | 0,75 mm ² / 20 AWG |
| Strip length | 9 mm / 0.35 inch |
| Note (strip length) | see also packaging or instructions |
| No. of poles | 2 |
| Total number of connection points | 2 |
| Total number of potentials | 2 |

Subject to changes. Please also observe the further product documentation!



| | |
|---|----|
| Conductor entry direction to mating direction | 0° |
|---|----|

Geometrical Data

| | |
|-------------|----------------------|
| Pin spacing | 4,4 mm / 0.173 inch |
| Width | 10,4 mm / 0.409 inch |
| Height | 11,7 mm / 0.461 inch |
| Depth | 34,1 mm / 1.343 inch |

Mechanical data

| | |
|---|--|
| Coding | B |
| Mating force of a plug-in connection | approx. 20 ... 70 N (depending on pole number) |
| Retention force of a plug-in connection | Locked: > 80 N |
| Unmating force of a plug-in connection | Unlocked: approx. 20 ... 70 N (depending on pole number) |
| Number of mating cycles | 200, without resistive load 100, with resistive load $I_N = 16$ A, tested (1.5 mm ² /16 AWG) |
| Marking | 1 2 |
| Protection class | IP20 |
| Note on protection class | IP40 with strain relief housing |
| Potential marking | 1 2 |

Plug connection

| | |
|------------------------------------|-------------------------|
| Contact type (pluggable connector) | Female connector/socket |
| Connector connection type | for conductor |
| Mismating protection | Yes |
| Locking of plug-in connection | locking lever |
| Locking lever | no |

Material Data

| | |
|--------------------------|--|
| Color | light green |
| Insulating material | Polyamide 66 (PA 66) |
| Clamping spring material | Chrome nickel spring steel (CrNi) |
| Contact material | Copper or copper alloy (surface-treated) |
| Fire load | 0.052 MJ |
| Weight | 2.6 g |

Subject to changes. Please also observe the further product documentation!

Environmental Requirements



| | |
|--|--|
| Processing temperature | -5 ... +40 °C |
| Continuous operating temperature | -35 ... +85 °C |
| Note on Continuous Service Temperature | Insulating parts for temperatures ≤ 105 °C |

Commercial data



| | |
|--------------------|---------------|
| Product Group | 20 (WINSTA) |
| Packaging type | BOX |
| Country of origin | PL |
| GTIN | 4055143499682 |
| Customs Tariff No. | 85366990990 |

Approvals / Certificates

Country specific Approvals


| Logo | Approval | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
| | CB DEKRA Certification B.V. | IEC 61984 | NL-52879 |
|  | CB DEKRA Certification B.V. | EN 61984 | 71-100413 |
|  | CCA DEKRA Certification B.V. | EN 60320 | 2148952.04 |

Ship Approvals

| Logo | Approval | Additional Approval Text | Certificate name |
|---|---|--------------------------|------------------|
|  | DNV GL Det Norske Veritas, Germanischer Lloyd | - | TAE00001Z6 |
|  | LR Lloyds Register | EN 61535 | 08/20047 (E2) |

UL-Approvals

Subject to changes. Please also observe the further product documentation!

| Logo | Approval | Additional Approval Text | Certificate name |
|--|---|--------------------------|------------------|
|  | cURus Underwriters Laboratories Inc. | UL 1977 | E45171 |

Counterpart

| | | |
|---|---|--|
|  | Item no.890-272 Plug; 2-pole; 1,50 mm ² ; light green | www.wago.com/890-272 |
|  | Item no.890-1602 T-distribution connector; 2-pole; Cod. B; 1 input; 2 outputs; 2 locking levers; light green | www.wago.com/890-1602 |
|  | Item no.890-772 Snap-in plug; 2-pole; Cod. B; 1,50 mm ² ; light green | www.wago.com/890-772 |
|  | Item no.890-1702 T-distribution connector; 2-pole; Cod. B; 1 input; 2 outputs; 3 locking levers; for flying leads; light green | www.wago.com/890-1702 |
|  | Item no.890-872 Plug for PCBs; straight; 2-pole; Cod. B | www.wago.com/890-872 |
|  | Item no.890-872/011-000 Plug for PCBs; angled; 2-pole; Cod. B | www.wago.com/890-872/011-000 |
|  | Item no.891-8992/005-105 pre-assembled interconnecting cable; Eca; Socket/plug; 2-pole; Cod. B; Control cable 2 x 1.0 mm ² ; 1 m; 1,00 mm ² ; light green | www.wago.com/891-8992/005-105 |
|  | Item no.891-8992/205-105 pre-assembled connecting cable; Eca; Plug/open-ended; 2-pole; Cod. B; Control cable 2 x 1.0 mm ² ; 1 m; 1,00 mm ² ; light green | www.wago.com/891-8992/205-105 |

Subject to changes. Please also observe the further product documentation!

Compatible products

tools

| | | |
|--|---|--|
|  | Item no.: 210-719 Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft | www.wago.com/210-719 |
|--|---|--|

| | | |
|--|--|--|
|  | Item no.: 890-382 Operating tool; 2-way; green | www.wago.com/890-382 |
|--|--|--|

Locking lever

| | |
|--|--|
| Item no.: 890-101 Locking lever; for manual operation; black | www.wago.com/890-101 |
|--|--|


| | |
|--|--|
| Item no.: 890-111 Locking lever; for flying leads; for tool operation; black | www.wago.com/890-111 |
|--|--|

| | |
|--|--|
| Item no.: 890-121 Locking lever; for manual operation; white | www.wago.com/890-121 |
|--|--|

| | |
|--|--|
| Item no.: 890-131 Locking lever; for flying leads; for tool operation; white | www.wago.com/890-131 |
|--|--|

Strain relief plate

| | | |
|--|---|--|
|  | Item no.: 890-502 Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; black | www.wago.com/890-502 |
|--|---|--|

| | | |
|--|---|--|
|  | Item no.: 890-502/342-000 Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; black | www.wago.com/890-502/342-000 |
|--|---|--|

| | |
|---|--|
| Item no.: 890-512 Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 30 mm; white | www.wago.com/890-512 |
|---|--|

| | |
|---|--|
| Item no.: 890-512/342-000 Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; white | www.wago.com/890-512/342-000 |
|---|--|

assembling

| | | |
|--|---|--|
|  | Item no.: 890-310 Mounting carrier; 2- to 5-pole; for flying leads; black | www.wago.com/890-310 |
|--|---|--|

| | | |
|--|---|--|
|  | Item no.: 890-311 Mounting carrier; 2- to 5-pole; for flying leads; white | www.wago.com/890-311 |
|--|---|--|

Subject to changes. Please also observe the further product documentation!

Downloads

CAD/CAE-Data

CAD data

2D/3D Models 890-262

[URL](#)

[Download](#)


CAE data

WSCAD Universe 890-262

[URL](#)

[Download](#)


Installation Notes

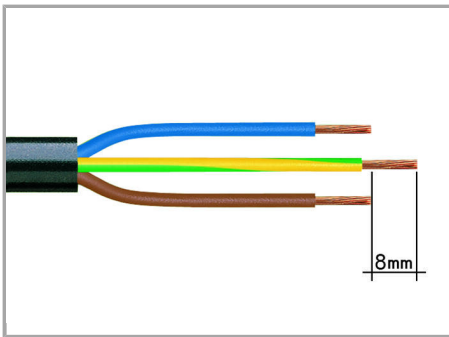


1. Strip length, outer insulation = 30 mm (2-pole), 37 mm (3-pole), 45 mm (4- and 5-pole)

2. Strip length = 9 mm

3. Extended ground conductor = 8 mm

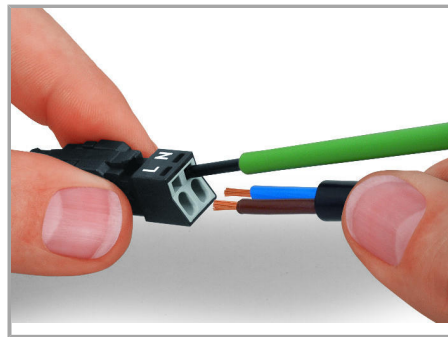


To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits backstop. Terminate solid conductors by simply pushing them in.

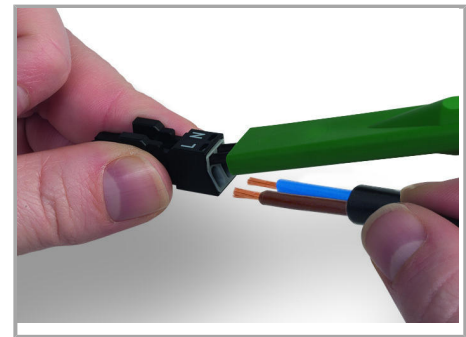

To terminate fine-stranded conductors, open clamping units via operating tool (890-382) and insert stripped conductors until they hit backstop.

Terminate solid conductors by simply pushing them in.


Subject to changes. Please also observe the further product documentation!

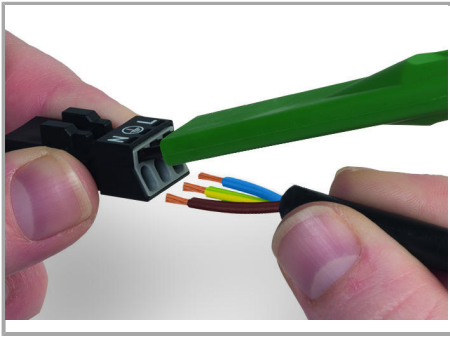


To terminate fine-stranded conductors, open clamping units via operating tool (890-383) and insert stripped conductors until they hit backstop.

Terminate solid conductors by simply pushing them in.

Installation

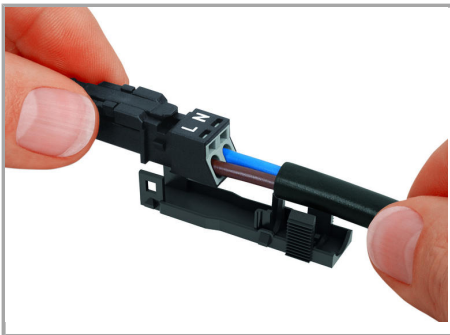

Latch wired connector onto the base of the strain relief housing.

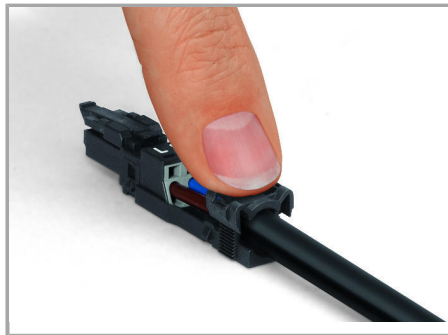


Push down strain relief clamp by hand.



Push down strain relief clamp via 2.5 mm screwdriver alternately on both sides.

Subject to changes. Please also observe the further product documentation!

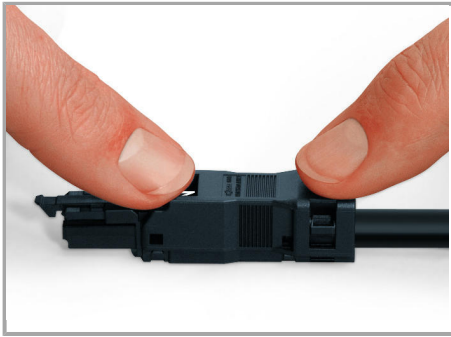


Latch the top of the strain relief housing.




The printed marking of the connector is clearly visible in the openings of the strain relief housing.

Mismatching protection

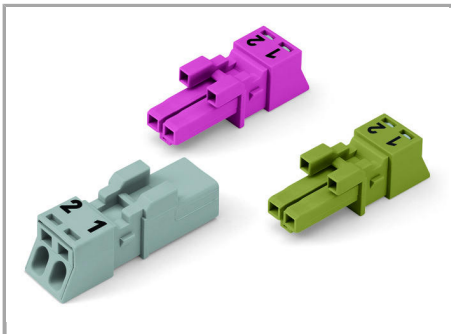

B-coded connectors with different colors can be plugged together.

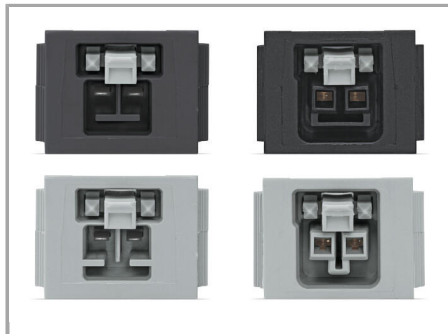

B-coded connectors (shown in gray) not only differ in color, but also in their design, making them incompatible with other coded connectors.



Important note:

Different colors and/or pole marking are used for circuit identification. Only connectors of the same color and same pole marking must be plugged together.

Product family

[*WINSTA*® MINI special](#)
[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!