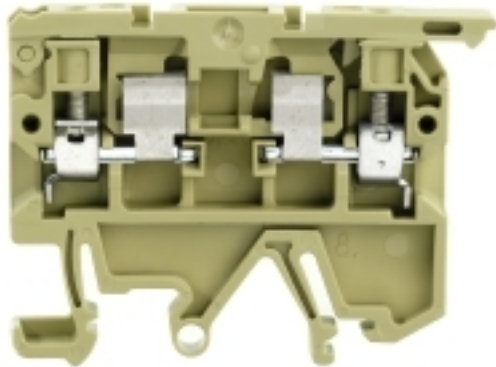


SAK Series
ASK 1/EN LD 120K 230VDC**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com**Product image**

Similar to illustration

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	ASK 1/EN LD 120K 230VDC
Order No.	0225660000
Version	SAK Series, Fuse terminal, Rated cross-section: 4 mm ² , Screw connection
GTIN (EAN)	4008 190086480
Qty.	25 pc(s).

Creation date April 30, 2020 7:48:47 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

SAK Series ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Width	8.1 mm	Width (inches)	0.319 inch
Height	58 mm	Height (inches)	2.283 inch
Depth	51.5 mm	Depth (inches)	2.028 inch
Net weight	13.68 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

Material data

Material	PA 66	Colour	beige / yellow
UL 94 flammability rating	V-2		

System specifications

Version	Screw connection, Fuse cartridge, with LED, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 35, TS 32	N-function	No
PE function	No	PEN function	No

Additional technical data

Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

Conductors for clamping (rated connection)

Blade size	0.6 x 3.5 mm	Clamping range, max.	4 mm ²
Clamping range, min.	0.13 mm ²	Clamping screw	M 3
Connection direction	on side	Gauge to IEC 60947-1	A3
Number of connections	2	Stripping length	9 mm
Tightening torque, max.	0.8 Nm	Tightening torque, min.	0.6 Nm
Torque level with DMS electric screwdriver	2	Twin wire-end ferrules, max.	1.5 mm ²
Twin wire-end ferrules, min.	0.5 mm ²	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 12	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section, finely stranded, max.	4 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	4 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, max.	4 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/4, min.	0.5 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross-section, solid core, max.	4 mm ²	Wire connection cross-section, solid core, min.	0.5 mm ²

Creation date April 30, 2020 7:48:47 PM CEST

SAK Series
ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Display element**

Operating voltage for display, max.	230 V	Type of voltage for indicator	DC
-------------------------------------	-------	-------------------------------	----

Fuse terminals

Cartridge fuse	G-Si. 5 x 20	Display	LED
Fuse holder (cartridge holder)	Pivoting	Operating voltage, max.	230 V
Type of voltage for indicator	DC		

Rating data

Rated cross-section	4 mm ²	Rated voltage	230 V
Rated current	6.3 A	Current at maximum wires	6.3 A
Volume resistance according to IEC 60947-7-x	1 mΩ	Power loss in accordance with IEC 60947-7-x	1.02 W
Rated impulse withstand voltage	6 kV	Pollution severity	3

UL rating data

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	12 AWG
Conductor size Factory wiring min. (UR)	26 AWG	Conductor size Field wiring max. (UR)	12 AWG
Conductor size Field wiring min. (UR)	22 AWG		

Classifications

ETIM 6.0	EC000899	ETIM 7.0	EC000899
eClass 9.0	27-14-11-16	eClass 9.1	27-14-11-16
eClass 10.0	27-14-11-16	UNSPSC	30-21-18-11

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1363_20160418_028_ISSUE01.pdf
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks

Safety noteSafety notice [Safety Information](#)

SAK Series ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

End bracket



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	EWK 1	Version
Order No.	0206160000	Accessories, End bracket
GTIN (EAN)	4008190080020	
Qty.	50 pc(s).	
Type	EW 35	Version
Order No.	0383560000	Accessories, End bracket
GTIN (EAN)	4008190181314	
Qty.	50 pc(s).	

QB RA



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	QB 3 WI RA8 IS	Version
Order No.	0461200000	SAK Series, Cross-connector, for cross-connection link, Number of poles: 3
GTIN (EAN)	4008190161699	
Qty.	50 pc(s).	
Type	QB 4 WI RA8 IS	Version
Order No.	0461300000	SAK Series, Cross-connector, for cross-connection link, Number of poles: 4
GTIN (EAN)	4008190025373	
Qty.	50 pc(s).	
Type	QB 2 WI RA8 IS	Version
Order No.	0461100000	SAK Series, Cross-connector, for cross-connection link, Number of poles: 2
GTIN (EAN)	4008190034818	
Qty.	50 pc(s).	

SAK Series
ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.


- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	DEK 5/8 MC SDR	Version
Order No.	1856750000	Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00
GTIN (EAN)	4032248400867	Weidmueller, To customer specification
Qty.	160 pc(s).	

Partition plates



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	TW SAKS2 HP/DBR/2	Version
Order No.	0607000000	SAK Series, Separation plate, 2 mm, dark brown, Used between terminals
GTIN (EAN)	4008190002732	
Qty.	20 pc(s).	

SAK Series ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	DEK 5/8 MC NE WS	Version	
Order No.	1856740000	Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00	
GTIN (EAN)	4032248400850	Weidmueller, white	
Qty.	800 pc(s).		

Fuses



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	G 20/ 1.00A/F	Version	
Order No.	0430700000	Active components, Fuse	
GTIN (EAN)	4008190093877		
Qty.	10 pc(s).		
Type	G 20/0.10A/F	Version	
Order No.	0430300000	Active components, Fuse	
GTIN (EAN)	4008190077174		
Qty.	10 pc(s).		
Type	G 20/0.20A/F	Version	
Order No.	0430400000	Active components, Fuse	
GTIN (EAN)	4008190152383		
Qty.	10 pc(s).		

SAK Series

ASK 1/EN LD 120K 230VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Type	KOHUE ASK 1	Version
Order No.	0553300000	SAK Series, Contact sleeve
GTIN (EAN)	4008190095604	
Qty.	100 pc(s).	
Type	G 20/0.50A/F	Version
Order No.	0430600000	Active components, Fuse
GTIN (EAN)	4008190046835	
Qty.	10 pc(s).	
Type	G 20/1.60A/F	Version
Order No.	0430800000	Active components, Fuse
GTIN (EAN)	4008190031503	
Qty.	10 pc(s).	
Type	G 20/2.50A/F	Version
Order No.	0431000000	Active components, Fuse
GTIN (EAN)	4008190085513	
Qty.	10 pc(s).	
Type	G 20/4.00A/F	Version
Order No.	0431200000	Active components, Fuse
GTIN (EAN)	4008190022983	
Qty.	10 pc(s).	
Type	G 20/0.25A/F	Version
Order No.	0430500000	Active components, Fuse
GTIN (EAN)	4008190153991	
Qty.	10 pc(s).	
Type	G 20/2.00A/F	Version
Order No.	0430900000	Active components, Fuse
GTIN (EAN)	4008190123567	
Qty.	10 pc(s).	
Type	G 20/5.00A/F	Version
Order No.	0431300000	Active components, Fuse
GTIN (EAN)	4008190185381	
Qty.	10 pc(s).	
Type	G 20/6.30A/F	Version
Order No.	0431400000	Active components, Fuse
GTIN (EAN)	4008190086053	
Qty.	10 pc(s).	
Type	G 20/0.63A/F	Version
Order No.	0439000000	Active components, Fuse
GTIN (EAN)	4008190131210	
Qty.	10 pc(s).	
Type	G 20/3.15A/F	Version
Order No.	0431100000	Active components, Fuse
GTIN (EAN)	4008190012977	
Qty.	10 pc(s).	

Data sheet

**SAK Series
ASK 1/EN LD 120K 230VDC**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

End plates



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	AP ASK1	Version
Order No.	0380360000	SAK Series, End plate, 1.5 mm, beige, Direct mounting
GTIN (EAN)	4008190104115	
Qty.	20 pc(s).	
Type	AP ASK1 BL	Version
Order No.	0380380000	SAK Series, End plate, 1.5 mm, blue, Direct mounting
GTIN (EAN)	4008190126292	
Qty.	20 pc(s).	