


OMNIMATE Signal - series TOP1.5GS TOP1.5GS3/90 7 2STI OR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image

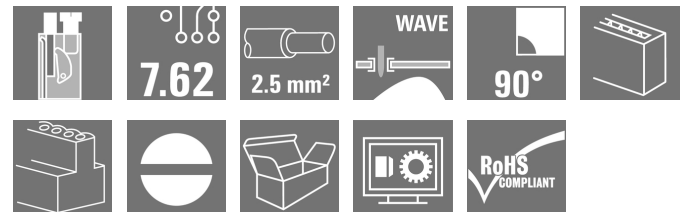

Conductor entry and screw connection in the same direction on this PCB terminal with 7.62 mm pitch for conductor cross-sections up to 2.5 mm². Conductor outlet direction 90° and 180°.

General ordering data

| | |
|--------------|---|
| Type | TOP1.5GS3/90 7 2STI OR |
| Order No. | 0393460000 |
| Version | Printed circuit board terminals, 7.62 mm, Number of poles: 3, 90°, Solder pin length (l): 3.5 mm, tinned, orange, TOP connection, Clamping range, max.: 2.5 mm ² , Box |
| GTIN (EAN) | 4032248189151 |
| Qty. | 100 pc(s). |
| Product data | IEC: 1000 V / 24 A / 0.5 - 2.5 mm ² UL: 300 V / 10 A / AWG 26 - AWG 14 |
| Packaging | Box |

Creation date April 30, 2020 11:26:08 PM CEST

OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

| | | | |
|--------------------------|------------|-----------------|------------|
| Width | 24.66 mm | Width (inches) | 0.971 inch |
| Height | 22 mm | Height (inches) | 0.866 inch |
| Height of lowest version | 18.5 mm | Depth | 19.5 mm |
| Depth (inches) | 0.768 inch | Net weight | 12.2 g |

System parameters

| | | | |
|--|-----------------------------------|--|----------------|
| Product family | OMNIMATE Signal - series TOP1.5GS | Wire connection method | TOP connection |
| Mounting onto the PCB | THT solder connection | Conductor outlet direction | 90° |
| Pitch in mm (P) | 7.62 mm | Pitch in inches (P) | 0.3 inch |
| Number of poles | 3 | Fitted by customer | No |
| Solder pin length (l) | 3.5 mm | Solder pin dimensions | 0.8 x 1.0 mm |
| Solder eyelet hole diameter (D) | 1.3 mm | Solder eyelet hole diameter tolerance (D) | + 0,1 mm |
| Number of solder pins per pole | 2 | Screwdriver blade | 0.6 x 3.5 |
| Screwdriver blade standard | DIN 5264 | Tightening torque, min. | 0.4 Nm |
| Tightening torque, max. | 0.5 Nm | Clamping screw | M 2.5 |
| Stripping length | 10 mm | L1 in mm | 15.24 mm |
| L1 in inches | 0.6 inch | Touch-safe protection acc. to DIN VDE 0470 | IP 20 |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch | Volume resistance | 1.20 mΩ |

Material data

| | | | |
|---------------------------------------|----------|---------------------------------------|-------------------------|
| Insulating material | PA | Colour | orange |
| Colour chart (similar) | RAL 2000 | Insulating material group | I |
| Comparative Tracking Index (CTI) | ≥ 600 | Insulation strength | ≥ 10 ⁸ Ω |
| UL 94 flammability rating | V-2 | Contact material | CuZn |
| Contact surface | tinned | Layer structure of solder connection | 1.5-3 μm Ni / 4-6 μm Sn |
| Storage temperature, min. | -25 °C | Storage temperature, max. | 50 °C |
| Max. relative humidity during storage | 70 % | Operating temperature, min. | -50 °C |
| Operating temperature, max. | 100 °C | Temperature range, installation, min. | -25 °C |
| Temperature range, installation, max. | 100 °C | | |

Conductors suitable for connection

| | |
|---|----------------------|
| Clamping range, min. | 0.13 mm ² |
| Clamping range, max. | 2.5 mm ² |
| Wire connection cross section AWG, min. | AWG 26 |
| Wire connection cross section AWG, max. | AWG 14 |
| Solid, min. H05(07) V-U | 0.5 mm ² |
| Solid, max. H05(07) V-U | 2.5 mm ² |
| Flexible, min. H05(07) V-K | 0.5 mm ² |
| Flexible, max. H05(07) V-K | 2.5 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.5 mm ² min. | |
| w. plastic collar ferrule, DIN 46228 pt 4, 2.5 mm ² max. | |
| w. wire end ferrule, DIN 46228 pt 1, min. | 0.5 mm ² |
| w. wire end ferrule, DIN 46228 pt 1, max. | 2.5 mm ² |

Creation date April 30, 2020 11:26:08 PM CEST

OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR
Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Plug gauge in accordance with EN 60999 a x b; ø 2.4 mm x 1.5 mm

| | | | |
|--|--|------------------------------|----------------------------|
| Clampable conductor | Cross-section for conductor connection | Type | fine-wired |
| | | nominal | 0.5 mm ² |
| wire end ferrule | | Stripping length | nominal 12 mm |
| | | Recommended wire-end ferrule | H0.5/16 OR |
| | | Stripping length | nominal 10 mm |
| | | Recommended wire-end ferrule | H0.5/10 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 0.75 mm ² | |
| wire end ferrule | | Stripping length | nominal 12 mm |
| | | Recommended wire-end ferrule | H0.75/16 W |
| | | Stripping length | nominal 10 mm |
| | | Recommended wire-end ferrule | H0.75/10 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 1 mm ² | |
| wire end ferrule | | Stripping length | nominal 12 mm |
| | | Recommended wire-end ferrule | H1.0/16D R |
| | | Stripping length | nominal 10 mm |
| | | Recommended wire-end ferrule | H1.0/10 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 1.5 mm ² | |
| wire end ferrule | | Stripping length | nominal 10 mm |
| | | Recommended wire-end ferrule | H1.5/10 |
| | | Stripping length | nominal 12 mm |
| | | Recommended wire-end ferrule | H1.5/16 R |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 2.5 mm ² | |
| wire end ferrule | | Stripping length | nominal 10 mm |
| | | Recommended wire-end ferrule | H2.5/10 |

Reference text Length of ferrules is to be chosen depending on the product and the rated voltage.. The outside diameter of the plastic collar should not be larger than the pitch (P)

 Max. clamping range 2.5 mm²
Rated data acc. to IEC

| | | | |
|---|------------------------|---|-------------------|
| tested acc. to standard | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C) | 24 A |
| Rated current, max. number of poles (Tu=20°C) | 19 A | Rated current, min. number of poles (Tu=40°C) | 21 A |
| Rated current, max. number of poles (Tu=40°C) | 16 A | Rated voltage for surge voltage class / pollution degree II/2 | 1,000 V |
| Rated voltage for surge voltage class / pollution degree III/2 | 630 V | Rated voltage for surge voltage class / pollution degree III/3 | 400 V |
| Rated impulse voltage for surge voltage class/ pollution degree II/2 | 4 kV | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 4 kV |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 4 kV | Short-time withstand current resistance | 3 x 1s with 120 A |

**OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Rated data acc. to CSA**

Institute (CSA)



Certificate No. (CSA)

154685-1501716

| | |
|-----------------------------------|--|
| Rated voltage (Use group B / CSA) | 300 V |
| Rated current (Use group B / CSA) | 10 A |
| Wire cross-section, AWG, min. | AWG 26 |
| Reference to approval values | Specifications are maximum values, details - see approval certificate. |

| | |
|-----------------------------------|--------|
| Rated voltage (Use group D / CSA) | 300 V |
| Rated current (Use group D / CSA) | 10 A |
| Wire cross-section, AWG, max. | AWG 14 |

Rated data acc. to UL 1059

| | |
|---------------------------------------|--------|
| Rated voltage (Use group B / UL 1059) | 300 V |
| Rated current (Use group B / UL 1059) | 10 A |
| Wire cross-section, AWG, min. | AWG 26 |

| | |
|---------------------------------------|--------|
| Rated voltage (Use group D / UL 1059) | 300 V |
| Rated current (Use group D / UL 1059) | 10 A |
| Wire cross-section, AWG, max. | AWG 14 |

Packing

| | | | |
|-----------|--------|------------|--------|
| Packaging | Box | VPE length | 43 mm |
| VPE width | 125 mm | VPE height | 275 mm |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC002643 | ETIM 7.0 | EC002643 |
| eClass 9.0 | 27-44-04-01 | eClass 9.1 | 27-44-04-01 |
| eClass 10.0 | 27-44-04-01 | UNSPSC | 30-21-18-01 |

Notes

| | |
|----------------|---|
| Notes | <ul style="list-style-type: none"> • Additional colours on request • Rated current related to rated cross-section & min. No. of poles. • Wire end ferrule without plastic collar to DIN 46228/1 • Wire end ferrule with plastic collar to DIN 46228/4 • Crimp form A for wire end ferrules with PZ 6/5 crimping tool are recommended for the largest cable sizes. • P on drawing = pitch • Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards. |
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |

Data sheet**OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Approvals**

Approvals



ROHS

Conform

Downloads

Brochure/Catalogue

[FL DRIVES EN](#)
[FL ANALO.SIGN.CONV. EN](#)
[MB DEVICE MANUF. EN](#)
[FL DRIVES DE](#)
[CAT 2 PORTFOLIOGUIDE EN](#)
[FL BUILDING SAFETY EN](#)
[FL APPL LED LIGHTING EN](#)
[FL INDUSTR.CONTROLS EN](#)
[FL MACHINE SAFETY EN](#)
[FL HEATING ELECTR EN](#)
[FL APPL_INVERTER EN](#)
[FL_BASE_STATION_EN](#)
[FL ELEVATOR EN](#)
[FL POWER SUPPLY EN](#)
[FL 72H SAMPLE SER EN](#)
[PO OMNIMATE EN](#)

Engineering Data

[EPLAN, WSCAD](#)

Engineering Data

[STEP](#)


Data sheet

**OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR**


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Dimensional drawing

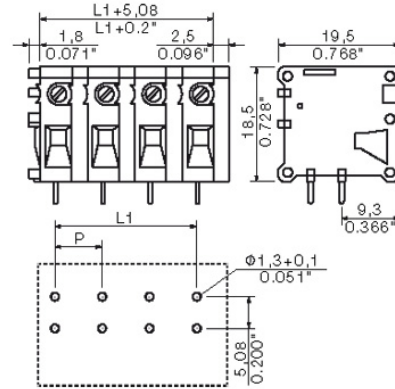

Graph

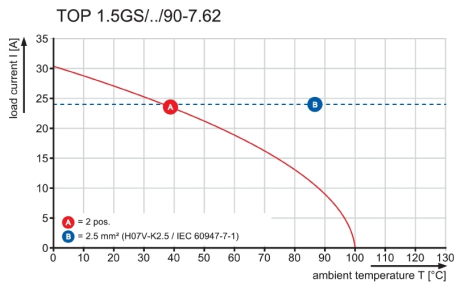

**OMNIMATE Signal - series TOP1.5GS
TOP1.5GS3/90 7 2STI OR**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Mounting blocks



Minor component, major effect:

Clip-on attachment elements increase the mechanical resilience of the circuit board terminals.

Clip-on or pre-assembled - always the right solution:

- Hard-wearing, precise fitting dovetail joint
- Hard-wearing metal threaded inserts
- Suitable for all outlet directions

Maximum stability, minimum effort:

- Extremely resilient for frequent fastening operations
- Complete set for easy selection

The result: soldering points, contacts and overall module are more resilient against mechanical stress such as vibrations and tensile loads.



General ordering data



| Type | TOP1.5GS BB OR | Version | Product data | Packaging |
|------------|----------------------------|---|--------------|-----------|
| Order No. | 1539860000 | Printed circuit board terminals, Accessories, Mounting block, orange, | | Box |
| GTIN (EAN) | 4008190061692 | Number of poles: 1 | | |
| Qty. | 20 pc(s). | | | |

MASSE OHNE TOLERANZ SIND KEINE PRUEFMASSE
 DIMS. WITHOUT TOLERANCE ARE NOT CONTROL DIMS.



DIE DEUTSCHE VERSION IST VERBINDLICH
 THE GERMAN VERSION IS BINDING

Technical Data

| | | |
|---|-----------------------|----------------------|
| Rev. | | |
| Material data | | |
| Insulation material type | | PA 66 |
| Insulation material colours | | S 33230 |
| Insulation material flammability class | UL94 | V-2 |
| Insulation resistance | MOhm | 10 ³ |
| Contact base material | | CuZn |
| Contact plating (mating end) | | Tin-plated |
| Contact plating (solder end) | | n/a |
| System characteristic values together with counterpart | | |
| Pitch P | mm/inch | 7.62 / 0.3 |
| Number of rows | | 1 |
| Dielectric strength (r.m.s withstand voltage) | kV | 2.5 |
| Conductor connection methode | | TOP connection |
| Plug in force (max.) | N/pole | n/a |
| Pull out force (max.) | N/pole | n/a |
| Through resistance (typical) | mOhm | 0.9 |
| Operating temperature range | °C | -20....+100 |
| Degree of protection acc. to VDE 0106 (plugged/unplugged) | | finger safe |
| Degree of protection acc. to DIN EN 60529 (plugged/unplugged) | | IP20 |
| Solder pin length L | mm/inch | 3.5 |
| PCB hole diameter D (wave soldering) | mm/inch | 1.3 |
| PCB hole diameter D (reflow soldering) | mm/inch | n/a |
| Resistance to soldering heat acc. to DIN IEC 60512-6 | °C/sec | 260/10 |
| Resistance to soldering heat acc. to EN 61760-1 | °C/sec | n/a |
| Solderability classification acc. to EN 61760-1 | | n/a |
| Solder connection type | | wave soldering |
| Solder pin diameter d (max.) | mm/inch | 1.28/0.05 |
| Application notes | | |
| Coding possibility | yes/no | no |
| Joinable without loss of pitch | yes/no | no |
| Manual assembly of modules | yes/no | yes |
| Max. number of poles | n | 12 |
| IEC 664-1 / VDE0110 (4.97) rated data | | |
| Rated cross section acc. to EN 60999 | mm ² | 1.5 |
| Rated current @ 20°C ambient (together with) | A | 16 |
| Rated current @ 40°C ambient (together with) | A | xxx |
| Overvoltage category / Pollution degree | | |
| Rated voltage | V | 500 630 1000 |
| Rated impulse voltage | kV | 6.0 6.0 6.0 |
| UL 1059 rated data  File No.: E60693 | | |
| Rated voltage | V | 300 |
| Rated current | A | 10 |
| Clamping range | mm ² / AWG | 0.5...1.5/26..14 |
| CSA C22.2 rated data  File No.: LR12400 | | |
| Rated voltage | V | 300 |
| Rated current | A | 10 |
| Clamping range | mm ² / AWG | 0.5.....1.5/26....14 |
| Packaging | | |
| | | carton |
| Downloads | | |
| | | www.weidmueller.de |

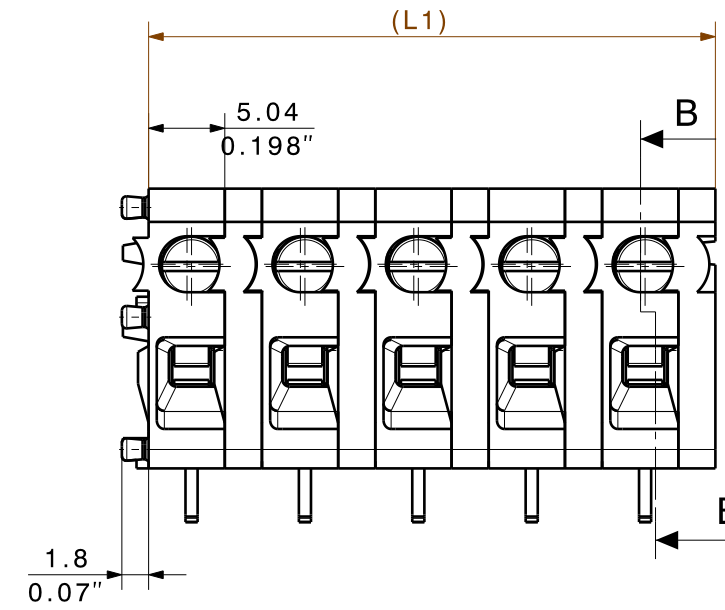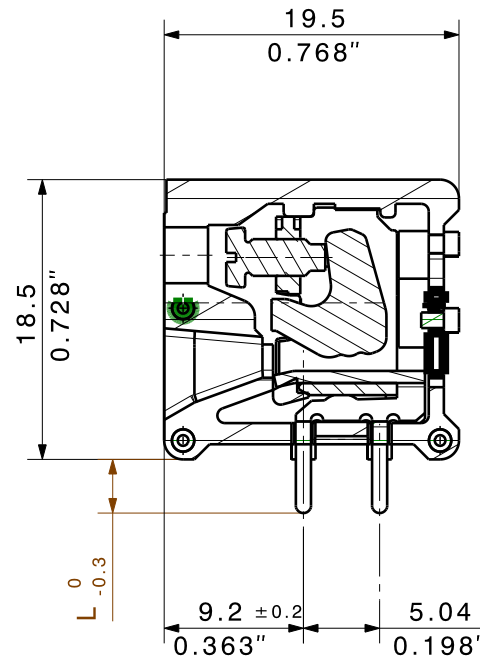

Drilling Diagram

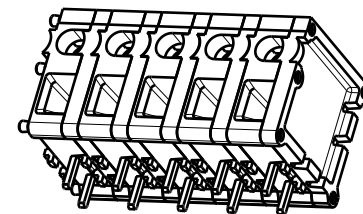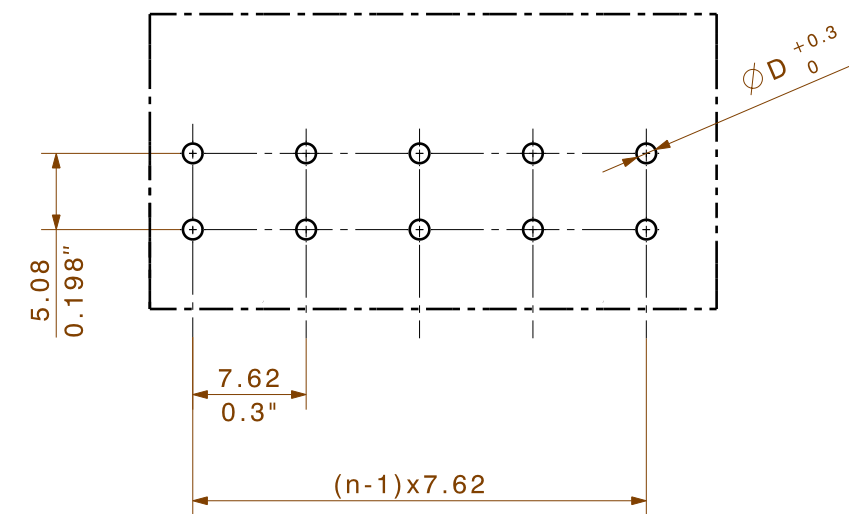

| | | |
|----|---------|-----------|
| 12 | 91,44 | 3,600 |
| 11 | 83,82 | 3,300 |
| 10 | 76,20 | 3,000 |
| 9 | 68,58 | 2,700 |
| 8 | 60,96 | 2,400 |
| 7 | 53,34 | 2,100 |
| 6 | 45,72 | 1,800 |
| 5 | 38,10 | 1,500 |
| 4 | 30,48 | 1,200 |
| 3 | 22,86 | 0,900 |
| 2 | 15,24 | 0,600 |
| 1 | 7,62 | 0,300 |
| n | L1 [mm] | L1 [Inch] |

02 Zeichnung komplett überarbeitet


- Without locking latches
- Sum of ambient temperature and temperature rise
- Recommendation for manual assembly
- Recommendation for automatic assembly
- Recommendation for wave soldering
- Recommendation for reflow soldering
- Referred to rated cross section and minimum pole number

n.a. = not applicable

Subject to technical changes

For the mounting of PCBs, it should be noted that the rated data stated here relates only to the PCB components alone. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110. The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application. Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

| | | | | | |
|---|--|---|------------|-----------------------|---------------|
| METRIC TOLERANCES: X. = ±0.3 X.X = ±0.1 X.XX = ±0.05 | | 35928/5 05.09.06 KRUG_M 01 | | CAT.NO.: | |
| MODIFICATION | |  | | C 33230 02 | |
| METRIC/INCH DIMENSIONS | | DATE | NAME | DRAWING NO. ISSUE NO. | |
| SCALE: 2:1 | | DRAWN | 06.04.2004 | HEINEL_M | |
| SUPERSEDES: | | RESPONSIBLE | | KRUG_M | |
| SUPERSEDED BY: . | | CHECKED | 05.09.2006 | HECKERT_M | |
| | | APPROVED | | GUENTHER_W | PRODUCT FILE: |
| | | | | SHEET 3 OF 4 SHEETS | |
| | | | | TOP 1.5 GS /90 2STI | |

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESER DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINER INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATET. ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTERREINTRAGUNG VORBEHALTEN. THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF A PATENT, UTILITY MODEL OR DESIGN.

Recommended wave soldering profiles

Weidmüller Interface GmbH & Co. KG
 Klängenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Single Wave:



Double Wave:



Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.