


SAK Series
DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Product image

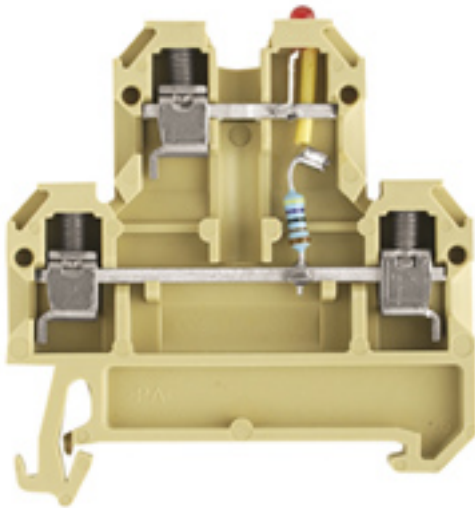

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | |
|------------|--|
| Type | DK 4/35 LD GR 24VDC |
| Order No. | 0395760000 |
| Version | SAK Series, Double-tier terminal, Rated cross-section: 4 mm ² , Screw connection, Direct mounting |
| GTIN (EAN) | 4008190029470 |
| Qty. | 25 pc(s). |

Creation date April 30, 2020 11:29:09 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**SAK Series
DK 4/35 LD GR 24VDC**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|------------|---------|-----------------|------------|
| Width | 6 mm | Width (inches) | 0.236 inch |
| Height | 50 mm | Height (inches) | 1.969 inch |
| Depth | 52.5 mm | Depth (inches) | 2.067 inch |
| Net weight | 11.84 g | | |

Temperatures

| | | | |
|----------------------------------|---------------|----------------------------------|--------|
| Storage temperature, max. | 40 °C | Storage temperature, min. | 10 °C |
| Storage temperature | 10 °C...40 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 100 °C | | |

Material data

| | | | |
|---------------------------|-------|--------|----------------|
| Material | PA 66 | Colour | beige / yellow |
| UL 94 flammability rating | V-2 | | |

System specifications

| | | | |
|-------------------------------------|---|-------------------------------|-----|
| Version | Screw connection, with LED, One end without connector | End cover plate required | Yes |
| Number of potentials | 1 | Number of levels | 2 |
| Number of clamping points per level | 2 | Number of potentials per tier | 1 |
| Levels cross-connected internally | Yes | PE connection | No |
| Rail | TS 35 | N-function | No |
| PE function | No | PEN function | No |

Additional technical data

| | | | |
|---------------------|-----------------|-----------------------------|---------|
| Installation advice | Direct mounting | Number of similar terminals | 1 |
| Open sides | right | Type of mounting | Snap-on |

Conductors for clamping (rated connection)

| | | | |
|---|---------------------|---|---------------------|
| Blade size | 0.6 x 3.5 mm | Clamping range, max. | 4 mm ² |
| Clamping range, min. | 0.5 mm ² | Clamping screw | M 3 |
| Connection cross-section, stranded, max. | 4 mm ² | Connection cross-section, stranded, min. | 0.5 mm ² |
| Connection direction | on side | Gauge to IEC 60947-1 | A3 |
| Number of connections | 4 | Stripping length | 9 mm |
| Tightening torque, max. | 1 Nm | Tightening torque, min. | 0.5 Nm |
| Torque level with DMS electric screwdriver | 2 | Type of connection | Screw connection |
| Wire connection cross section AWG, max. | AWG 12 | Wire connection cross section AWG, min. | AWG 22 |
| Wire connection cross section, finely stranded, max. | 4 mm ² | Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max. | 4 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min. | 0.5 mm ² | Wire connection cross-section, finely stranded, min. | 0.5 mm ² |
| Wire connection cross-section, solid core, max. | 4 mm ² | Wire connection cross-section, solid core, min. | 0.5 mm ² |

Data sheet

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions

TS 35 offset 25 mm

Display element

| | | | |
|-------------------------------------|------|-------------------------------------|-------|
| Current | 5 mA | Indicator element | green |
| Operating voltage for display, max. | 24 V | Operating voltage for display, min. | 24 V |
| Type of voltage for indicator | DC | | |

Rating data

| | | | |
|--|-------------------|---|---------------|
| Rated cross-section | 4 mm ² | Rated voltage | 24 V |
| Current at maximum wires | 10 A | Standards | IEC 60947-7-1 |
| Volume resistance according to IEC 60947-7-x | 1 mΩ | Power loss in accordance with IEC 60947-7-x | 1.02 W |
| Rated impulse withstand voltage | 1 kV | Pollution severity | 3 |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC000897 | ETIM 7.0 | EC000897 |
| eClass 9.0 | 27-14-11-20 | eClass 9.1 | 27-14-11-20 |
| eClass 10.0 | 27-14-11-20 | UNSPSC | 30-21-18-11 |

Approvals

Approvals



ROHS Conform

Downloads

| | |
|---|--|
| Approval/Certificate/Document of Conformity | DE_PT1381_20160418_105_ISSUE01.pdf |
| Engineering Data | EPLAN_WSCAD |
| User Documentation | StorageConditionsTerminalBlocks |

Safety note

Safety notice [Safety Information](#)

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 PLUS MC NE WS | Version |
| Order No. | 1011320000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248717644 | Weidmueller, white |
| Qty. | 1,000 pc(s). | |

Q / AKZ



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | Q 2 AKZ4 | Version |
| Order No. | 0336400000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 2 |
| GTIN (EAN) | 4008190037680 | |
| Qty. | 50 pc(s). | |
| Type | Q 3 AKZ4 | Version |
| Order No. | 0336500000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 3 |
| GTIN (EAN) | 4008190121730 | |
| Qty. | 50 pc(s). | |
| Type | Q 10 AKZ4 | Version |
| Order No. | 0368600000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 10 |
| GTIN (EAN) | 4008190056766 | |
| Qty. | 20 pc(s). | |

Data sheet

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

| | | |
|------------|---------------------------|---|
| Type | Q 4 AKZ4 | Version |
| Order No. | 033660000 | SAK Series, Cross-connector, for cross-connection link, Number of |
| GTIN (EAN) | 4008190096656 | poles: 4 |
| Qty. | 50 pc(s). | |

End bracket



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|----------------------------|--------------------------|
| Type | EWK 1 | Version |
| Order No. | 0206160000 | Accessories, End bracket |
| GTIN (EAN) | 4008190080020 | |
| Qty. | 50 pc(s). | |

| | | |
|------------|----------------------------|--------------------------|
| Type | EW 35 | Version |
| Order No. | 0383560000 | Accessories, End bracket |
| GTIN (EAN) | 4008190181314 | |
| Qty. | 50 pc(s). | |

Test plug



Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

| | | |
|------------|----------------------------|------------------------|
| Type | PS 2.3 RT | Version |
| Order No. | 0180400000 | Accessories, Test plug |
| GTIN (EAN) | 4008190060121 | |
| Qty. | 20 pc(s). | |

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Partition plates



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| Type | WTW EN | Version |
|------------|----------------------------|----------------------------|
| Order No. | 1058800000 | W-Series, Separation plate |
| GTIN (EAN) | 4008190140175 | |
| Qty. | 20 pc(s). | |

QB RA



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data


| Type | QB 3 WI RA6 IS | Version |
|------------|----------------------------|--|
| Order No. | 0482800000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 3 |
| GTIN (EAN) | 4008190145217 | |
| Qty. | 50 pc(s). | |
| Type | QB 2 WI RA6 IS | Version |
| Order No. | 0482700000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 2 |
| GTIN (EAN) | 4008190166021 | |
| Qty. | 50 pc(s). | |
| Type | QB 4 WI RA6 IS | Version |
| Order No. | 0482900000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 4 |
| GTIN (EAN) | 4008190086169 | |
| Qty. | 50 pc(s). | |

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC SDR | Version |
| Order No. | 1609830000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190456603 | Weidmueller, To customer specification |
| Qty. | 200 pc(s). | |
| Type | DEK 5/6 PLUS MC SDR | Version |
| Order No. | 1038650000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248767908 | Weidmueller, To customer specification |
| Qty. | 200 pc(s). | |

QB



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data


| | | |
|------------|----------------------------|---|
| Type | QB 75/6.2/9/WI | Version |
| Order No. | 0526400000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 75 |
| GTIN (EAN) | 4008190099923 | |
| Qty. | 10 pc(s). | |
| Type | QB 75/6.2/15 | Version |
| Order No. | 0535200000 | SAK Series, Cross-connector, for cross-connection link, Number of poles: 75 |
| GTIN (EAN) | 4008190179168 | |
| Qty. | 10 pc(s). | |

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | DEK 5/6 MC NE GN | Version |
| Order No. | 1238310000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118271812 | Weidmueller, green |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE GE | Version |
| Order No. | 1238280000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118038750 | Weidmueller, yellow |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE GR | Version |
| Order No. | 1238330000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118323306 | Weidmueller, grey |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE WS | Version |
| Order No. | 1609820000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4008190203436 | Weidmueller, white |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE BL | Version |
| Order No. | 1238290000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118267327 | Weidmueller, blue |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE OR | Version |
| Order No. | 1912090000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4032248540525 | Weidmueller, orange |
| Qty. | 1,000 pc(s). | |
| Type | DEK 5/6 MC NE BR | Version |
| Order No. | 1454900000 | Dekafix, Terminal marker, 5 x 6 mm, Pitch in mm (P): 6.00 |
| GTIN (EAN) | 4050118323313 | Weidmueller, brown |
| Qty. | 1,000 pc(s). | |

**SAK Series
DK 4/35 LD GR 24VDC**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Non-insulated sockets



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|---------------------------|---------------------|
| Type | STB 8.5/D4/2.3/M2.5 AKZ | Version |
| Order No. | 021570000 | Accessories, Socket |
| GTIN (EAN) | 4008190184872 | |
| Qty. | 50 pc(s). | |

DEK 5/6



WS/ DEK

MultiMark DEK/WS connector markers use an innovative composite material made from two components. The hard base contour of the marker snaps securely into the connector. The elastic surface finish makes the marker easy to mount. This specially punched material enables the strips to be stretched to accommodate the slight variations in spacing that tend to add up, especially with long terminal blocks. Another advantage: the excellent printability of the surface material guarantees durable and wear-resistant labelling. A print resolution of 300 dpi also produces a very legible script.

Your benefits with MultiMark

- Firm hold and durable printing
- Continuous strips save installation time
- Easy mounting thanks to an innovative composite material
- Large label field for optimal legibility
- High flexibility thanks to manufacturer independence

General ordering data

| | | |
|------------|----------------------------|--|
| Type | DEK 5/6 MM WS | Version |
| Order No. | 2007120000 | Dekafix, Terminal marker, 5 x 6 mm, Weidmueller, white |
| GTIN (EAN) | 4050118392104 | |
| Qty. | 600 pc(s). | |

SAK Series DK 4/35 LD GR 24VDC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Small partition



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|----------------------------|--|
| Type | TSCH 4 AKZ4 | Version |
| Order No. | 0363360000 | SAK Series, Small partition, beige, 6 mm |
| GTIN (EAN) | 4008190136680 | |
| Qty. | 100 pc(s). | |

End plates



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | AP DK4/380 Q | Version |
| Order No. | 0438560000 | SAK Series, End plate, 1.5 mm, beige, Direct mounting |
| GTIN (EAN) | 4008190133351 | |
| Qty. | 20 pc(s). | |
| Type | AP DK4 BL | Version |
| Order No. | 0359280000 | SAK Series, End plate, 1.5 mm, blue, Direct mounting |
| GTIN (EAN) | 4008190031213 | |
| Qty. | 20 pc(s). | |
| Type | AP DK4 | Version |
| Order No. | 0359260000 | SAK Series, End plate, 1.5 mm, beige, Direct mounting |
| GTIN (EAN) | 4008190012991 | |
| Qty. | 20 pc(s). | |

Data sheet**SAK Series
DK 4/35 LD GR 24VDC**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Locking tabs****Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

| | | |
|------------|----------------------------|---|
| Type | VL 2 AKZ4/DK4 | Version |
| Order No. | 0446700000 | SAK Series, Cross-connection lug, for cross-connection link, Number |
| GTIN (EAN) | 4008190055486 | of poles: 2 |
| Qty. | 50 pc(s). | |