


## OMNIMATE Signal - series BC/SC 3.81 SCDV-THR 3.81/06/180G 3.2SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Product image

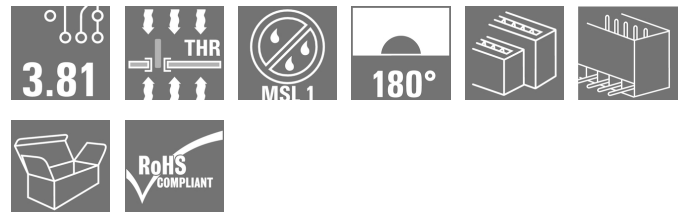

Similar to illustration

High-temperature-resistant two-tier SCDV-THR pin header for reflow soldering.

- It allows you to use two interfaces on only one surface and with only one step in the work flow.
- Outlet direction: 90° (recumbent)
- Connections at two offset levels and open access to each row.
- Space for labelling and coding
- Packed in cardboard box.

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

### General ordering data

|              |  |
|--------------|--|
| Type         | SCDV-THR 3.81/06/180G 3.2SN BK BX  |
| Order No.    | <a href="#">1035480000</a>   |
| Version      | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.81 mm, Number of poles: 6, 180°, Solder pin length (l): 3.2 mm, tinned, black, Box |
| GTIN (EAN)   | 4032248764242  |
| Qty.         | 50 pc(s).  |
| Product data | IEC: 320 V / 17.5 A<br>UL: 300 V / 11 A  |
| Packaging    | Box  |

Creation date May 1, 2020 9:12:39 AM CEST

**OMNIMATE Signal - series BC/SC 3.81  
SCDV-THR 3.81/06/180G 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Dimensions and weights**

|                          |            |                 |            |
|--------------------------|------------|-----------------|------------|
| Width                    | 12.82 mm   | Width (inches)  | 0.505 inch |
| Height                   | 25.1 mm    | Height (inches) | 0.988 inch |
| Height of lowest version | 21.9 mm    | Depth           | 22.7 mm    |
| Depth (inches)           | 0.894 inch | Net weight      | 4.32 g     |

**System specifications**

|  |                                     |  |                        |
|--|-------------------------------------|--|------------------------|
| Product family                             | OMNIMATE Signal - series BC/SC 3.81 | Type of connection                           | Board connection       |
| Mounting onto the PCB                      | THT/THR solder connection           | Pitch in mm (P)                              | 3.81 mm                |
| Pitch in inches (P)                        | 0.15 inch                           | Outgoing elbow                               | 180°                   |
| Number of poles                            | 6                                   | Number of solder pins per pole               | 1                      |
| Solder pin length (l)                      | 3.2 mm                              | Solder pin length tolerance                  | +0,02 / -0,02 mm       |
| Tolerance of solder pin position           | ± 0.1 mm                            | Solder pin dimensions                        | d = 1.0 mm, Octagonal  |
| Solder pin dimensions = d tolerance        | 0 / -0,03 mm                        | Solder eyelet hole diameter (D)              | 1.3 mm                 |
| Solder eyelet hole diameter tolerance (D)+ | 0,1 mm                              | Outside diameter of solder pad               | 2.1 mm                 |
| Template aperture diameter                 | 1.9 mm                              | L1 in mm                                     | 7.62 mm                |
| L1 in inches                               | 0.3 inch                            | Number of rows                               | 2                      |
| Pin series quantity                        | 2                                   | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch |
| Touch-safe protection acc. to DIN VDE 0470 | IP 20                               | Volume resistance                            | ≤ 5mΩ                  |
| Can be coded                               | Yes                                 | Plugging cycles                              | 25                     |

**Material data**

|                                       |              |                                       |                     |
|---------------------------------------|--------------|---------------------------------------|---------------------|
| Insulating material                   | LCP GF       | Colour                                | black               |
| Colour chart (similar)                | RAL 9011     | Insulating material group             | IIIa                |
| Comparative Tracking Index (CTI)      | ≥ 175        | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| Moisture Level (MSL)                  | 1            | UL 94 flammability rating             | V-0                 |
| GWIT                                  | 930 °C       | GWFI                                  | 960 °C              |
| Contact material                      | Copper alloy | Contact surface                       | tinned              |
| Storage temperature, min.             | -25 °C       | Storage temperature, max.             | 50 °C               |
| Max. relative humidity during storage | 70 %         | Operating temperature, min.           | -50 °C              |
| Operating temperature, max.           | 120 °C       | Temperature range, installation, min. | -25 °C              |
| Temperature range, installation, max. | 120 °C       |                                       |                     |

**Rated data acc. to IEC**

|   |                        |   |                  |
|---|------------------------|---|------------------|
| tested acc. to standard   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 17.5 A           |
| Rated current, max. number of poles (Tu=20°C)                             | 13.2 A                 | Rated current, min. number of poles (Tu=40°C)                         | 17 A             |
| Rated current, max. number of poles (Tu=40°C)                             | 12.2 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 320 V            |
| Rated voltage for surge voltage class / pollution degree III/2            | 160 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 160 V            |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 2.5 kV                 | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV           |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 2.5 kV                 | Short-time withstand current resistance                               | 3 x 1s with 76 A |

## OMNIMATE Signal - series BC/SC 3.81 SCDV-THR 3.81/06/180G 3.2SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Technical data

### Rated data acc. to CSA

|                                   |       |                                   |       |
|-----------------------------------|-------|-----------------------------------|-------|
| Rated voltage (Use group B / CSA) | 300 V | Rated voltage (Use group D / CSA) | 300 V |
| Rated current (Use group B / CSA) | 11 A  | Rated current (Use group D / CSA) | 11 A  |

### Rated data acc. to UL 1059

Institute (cURus)



Certificate No. (cURus)

E60693

|                                       |       |                                       |       |
|---------------------------------------|-------|---------------------------------------|-------|
| Rated voltage (Use group B / UL 1059) | 300 V | Rated voltage (Use group D / UL 1059) | 300 V |
| Rated current (Use group B / UL 1059) | 11 A  | Rated current (Use group D / UL 1059) | 11 A  |

Reference to approval values  
Specifications are maximum values, details - see approval certificate.

### Packing

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 25 mm  |
| VPE width | 130 mm | VPE height | 240 mm |

### Classifications

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0   | EC002637    |
| eClass 9.0  | 27-44-04-02 | eClass 9.1 | 27-44-04-02 |
| eClass 10.0 | 27-44-04-02 |            |             |

### Notes

Notes

- Rated current related to rated cross-section & min. No. of poles.
- Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.
- P on drawing = pitch

IPC conformity

Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.

### Approvals

Approvals



ROHS

Conform

**Data sheet****OMNIMATE Signal - series BC/SC 3.81  
SCDV-THR 3.81/06/180G 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**


|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a>   |
| Brochure/Catalogue                          | <a href="#">FL DRIVES EN</a><br><a href="#">MB DEVICE MANUF. EN</a><br><a href="#">FL DRIVES DE</a><br><a href="#">CAT 2 PORTFOLIOGUIDE EN</a><br><a href="#">FL BUILDING SAFETY EN</a><br><a href="#">FL APPL LED LIGHTING EN</a><br><a href="#">FL INDUSTR.CONTROLS EN</a><br><a href="#">FL MACHINE SAFETY EN</a><br><a href="#">FL HEATING ELECTR EN</a><br><a href="#">FL APPL INVERTER EN</a><br><a href="#">FL BASE STATION EN</a><br><a href="#">FL ELEVATOR EN</a><br><a href="#">FL POWER SUPPLY EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a> |
| Engineering Data                            | <a href="#">STEP</a>  |
| White paper surface mount technology        | <a href="#">Download Whitepaper</a>   |

**OMNIMATE Signal - series BC/SC 3.81  
SCDV-THR 3.81/06/180G 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensional drawing**

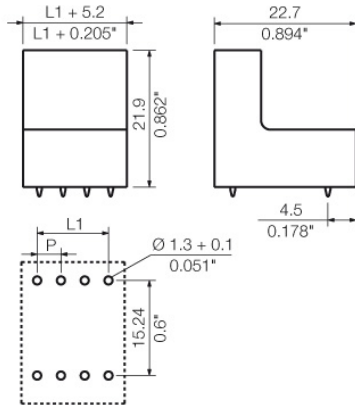

## OMNIMATE Signal - series BC/SC 3.81 SCDV-THR 3.81/06/180G 3.2SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Mating connector (fully pluggable)

#### BCL-SMT 3.81/180



The inverted BCL-SMT socket block for the PCB offers three significant advantages:

- The BCL-SMT offers touch-safe security on the PCB which makes it ideal for live, current-carrying outputs.
- The BCL-SMT widens the range of applications with board-to-board connections between component assemblies.
- The BCL-SMT is reflow-compatible and can be seamlessly integrated into the automatic assembly and soldering process.

Two outlet directions give you a choice of position and thus more design flexibility.

- 180° standing
- 90° recumbent

Two housing variants are available for the BCL-SMT:

- Without flange
- With inverted solder flange ("LFI", with nut)
  - Fastened to PCB without additional screw
  - Fastened with screw to the SCZ FI

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of customary connectors and offer space for labelling and coding.

#### General ordering data

| Type       | BCL-SMT 3.81/03/180 1.5 ... | Version  | Product data                            | Packaging |
|------------|-----------------------------|--|---|-----------|
| Order No.  | <a href="#">1976500000</a>  | PCB plug-in connector, female header, closed side, THT/THR solder connection, 3.81 mm, Number of poles: 3, 180°, Solder pin length (l): 1.5 mm, tinned, black, Box | IEC: 320 V / 17.5 A<br>UL: 300 V / 10 A | Box       |
| GTIN (EAN) | 4032248678990               |  |   |           |
| Qty.       | 50 pc(s).                   |  |   |           |

## Data sheet

### OMNIMATE Signal - series BC/SC 3.81 SCDV-THR 3.81/06/180G 3.2SN BK BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

### Coding elements



**Only connects what is supposed to be connected:  
the right connection at the right place.**

Coding elements and locking devices clearly assign connecting elements during the manufacturing process and operation

The coding elements and locking devices are inserted prior to assembly or during the cable assembly phase. The Weidmüller alternative: configure online using the variant configurator to precode prior to delivery.

Incorrect assembly on the circuit board and incorrect plugging of connecting elements is no longer possible. The advantage: no troubleshooting during manufacture and no operational errors by the user.

### General ordering data

|            |                            |   |              |
|------------|----------------------------|---|--------------|
| Type       | SC-SMT 3.81 KO BK BX       | Version   | Product data |
| Order No.  | <a href="#">2460700000</a> | PCB plug-in connector, Accessories, Coding element, black |              |
| GTIN (EAN) | 4050118480023              |   |              |
| Qty.       | 100 pc(s).                 |   |              |
| Type       | SC-SMT 3.81 KO WT BX       | Version   | Product data |
| Order No.  | <a href="#">2467670000</a> | PCB plug-in connector, Accessories, Coding element, white |              |
| GTIN (EAN) | 4050118494693              |   |              |
| Qty.       | 100 pc(s).                 |   |              |

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
 Klängenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.



## Recommended reflow soldering profile

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



### Reflow soldering profile

The perfect soldering profile for SMT Surface Mount Technology is one the most exiting question in SMT production. But there are more than one correct answer: The diagram of temperature-on-time is related to processing features of solder paste and to maximum load of components.

We have to consider the following parameters:

- Time for pre heating
- Maximum temperature
- Time above melting point
- Time for cooling
- Maximum heating rate
- Maximum cooling rate

We recommend a typical solder profile with associated process limits. With preheating components and board are prepared smoothly for the solder phase. Heating rate is typically  $\leq +3\text{K/s}$ . In parallel the solder paste is ‚activated‘. The time above melting point of 217°C the paste gets liquid and components and boards begin to connect. The maximum temperature of 245°C to 254°C should stay between 10 and 40 seconds. In the cooling phase at  $\geq -6\text{K/s}$  solder is cured. Board and components cool down while avoiding cold cracks.