


## OMNIMATE Signal - series BC/SC 3.81 SCDN 3.81/30/90G 3.2SN OR BX

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Product image

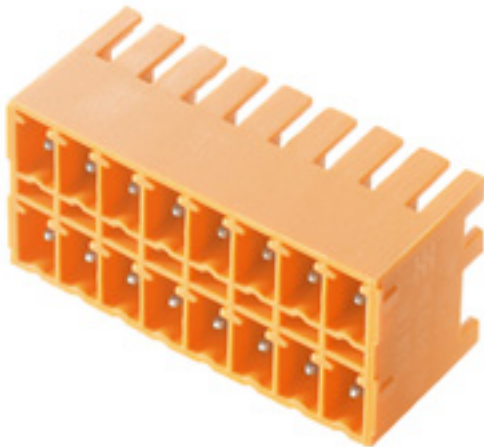

Similar to illustration

Extra flat two-tier SCDN pin header for wave soldering.

- Two compact interfaces are used with the flat BCF 3.81 (PUSH IN) socket block.
- Available as 90° (recumbent).
- Connections on a single level, allowing access that is flush over the front board.
- Space for labelling and coding
- Packed in cardboard box.

Weidmüller's 3.81-mm-pitch (0.15 inch) plug-in connectors are compatible with the layouts of standard connectors and offer space for labelling and coding.

### General ordering data

|              |   |
|--------------|---|
| Type         | SCDN 3.81/30/90G 3.2SN OR BX  |
| Order No.    | <a href="#">1040560000</a>  |
| Version      | PCB plug-in connector, male header, closed side, THT solder connection, 3.81 mm, Number of poles: 30, 90°, Solder pin length (l): 3.2 mm, tinned, orange, Box |
| GTIN (EAN)   | 4032248769209   |
| Qty.         | 20 pc(s).   |
| Product data | IEC: 320 V / 17.5 A<br>UL: 300 V / 10 A   |
| Packaging    | Box   |

Creation date May 1, 2020 10:10:33 AM CEST

**OMNIMATE Signal - series BC/SC 3.81  
SCDN 3.81/30/90G 3.2SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Dimensions and weights**

|                          |            |                 |            |
|--------------------------|------------|-----------------|------------|
| Width                    | 58.54 mm   | Width (inches)  | 2.305 inch |
| Height                   | 18.4 mm    | Height (inches) | 0.724 inch |
| Height of lowest version | 15.2 mm    | Depth           | 13.3 mm    |
| Depth (inches)           | 0.524 inch | Net weight      | 8.417 g    |

**System specifications**

|  |                                     |  |                        |
|--|-------------------------------------|--|------------------------|
| Product family                             | OMNIMATE Signal - series BC/SC 3.81 | Type of connection                           | Board connection       |
| Mounting onto the PCB                      | THT solder connection               | Pitch in mm (P)                              | 3.81 mm                |
| Pitch in inches (P)                        | 0.15 inch                           | Outgoing elbow                               | 90°                    |
| Number of poles                            | 30                                  | Number of solder pins per pole               | 1                      |
| Solder pin length (l)                      | 3.2 mm                              | Solder pin length tolerance                  | +0,02 / -0,02 mm       |
| Tolerance of solder pin position           | ± 0.20 mm                           | Solder pin dimensions                        | d = 1.0 mm, Octagonal  |
| Solder pin dimensions = d tolerance        | 0 / -0,03 mm                        | Solder eyelet hole diameter (D)              | 1.2 mm                 |
| Solder eyelet hole diameter tolerance (D)+ | 0,1 mm                              | L1 in mm                                     | 53.34 mm               |
| L1 in inches                               | 2.1 inch                            | Number of rows                               | 2                      |
| Pin series quantity                        | 2                                   | Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch |
| Touch-safe protection acc. to DIN VDE 0470 | IP 20                               | Volume resistance                            | ≤ 5mΩ                  |
| Can be coded                               | Yes                                 | Plugging cycles                              | 25                     |

**Material data**

|                                       |              |                                       |                     |
|---------------------------------------|--------------|---------------------------------------|---------------------|
| Insulating material                   | PA GF        | Colour                                | orange              |
| Colour chart (similar)                | RAL 2000     | Insulating material group             | II                  |
| Comparative Tracking Index (CTI)      | ≥ 550        | Insulation strength                   | ≥ 10 <sup>8</sup> Ω |
| UL 94 flammability rating             | V-0          | GWFI                                  | 960 °C              |
| Contact material                      | Copper alloy | Contact surface                       | tinned              |
| Storage temperature, min.             | -25 °C       | Storage temperature, max.             | 50 °C               |
| Max. relative humidity during storage | 70 %         | Operating temperature, min.           | -50 °C              |
| Operating temperature, max.           | 120 °C       | Temperature range, installation, min. | -25 °C              |
| Temperature range, installation, max. | 120 °C       |                                       |                     |

**Rated data acc. to IEC**

|   |                        |   |                  |
|---|------------------------|---|------------------|
| tested acc. to standard   | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C)                         | 17.5 A           |
| Rated current, max. number of poles (Tu=20°C)                             | 13.2 A                 | Rated current, min. number of poles (Tu=40°C)                         | 17 A             |
| Rated current, max. number of poles (Tu=40°C)                             | 12.2 A                 | Rated voltage for surge voltage class / pollution degree II/2         | 320 V            |
| Rated voltage for surge voltage class / pollution degree III/2            | 160 V                  | Rated voltage for surge voltage class / pollution degree III/3        | 160 V            |
| Rated impulse voltage for surge voltage class/ pollution degree II/2      | 2.5 kV                 | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV           |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 2.5 kV                 | Short-time withstand current resistance                               | 3 x 1s with 76 A |

**Rated data acc. to CSA**

|                                   |       |                                   |       |
|-----------------------------------|-------|-----------------------------------|-------|
| Rated voltage (Use group B / CSA) | 300 V | Rated voltage (Use group D / CSA) | 300 V |
| Rated current (Use group B / CSA) | 11 A  | Rated current (Use group D / CSA) | 11 A  |

**Data sheet**

**OMNIMATE Signal - series BC/SC 3.81  
SCDN 3.81/30/90G 3.2SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**Rated data acc. to UL 1059**

Institute (cURus)



Certificate No. (cURus)

E60693

|                                       |  |                                       |       |
|---------------------------------------|--|---------------------------------------|-------|
| Rated voltage (Use group B / UL 1059) | 300 V  | Rated voltage (Use group D / UL 1059) | 300 V |
| Rated current (Use group B / UL 1059) | 10 A   | Rated current (Use group D / UL 1059) | 10 A  |
| Reference to approval values          | Specifications are maximum values, details - see approval certificate. |                                       |       |

**Packing**

|           |        |            |        |
|-----------|--------|------------|--------|
| Packaging | Box    | VPE length | 495 mm |
| VPE width | 355 mm | VPE height | 182 mm |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC002637    | ETIM 7.0   | EC002637    |
| eClass 9.0  | 27-44-04-02 | eClass 9.1 | 27-44-04-02 |
| eClass 10.0 | 27-44-04-02 |            |             |

**Notes**

|                |   |
|----------------|---|
| Notes          | <ul style="list-style-type: none"> <li>• Additional colours on request</li> <li>• Rated current related to rated cross-section &amp; min. No. of poles.</li> <li>• Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards.</li> <li>• P on drawing = pitch</li> </ul> |
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request.  |

**Approvals**

Approvals



|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Data sheet****OMNIMATE Signal - series BC/SC 3.81  
SCDN 3.81/30/90G 3.2SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

---

|   |   |
|---|---|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of the Manufacturer</a>   |
| Brochure/Catalogue                          | <a href="#">FL DRIVES EN</a><br><a href="#">MB DEVICE MANUF. EN</a><br><a href="#">FL DRIVES DE</a><br><a href="#">CAT 2 PORTFOLIOGUIDE EN</a><br><a href="#">FL BUILDING SAFETY EN</a><br><a href="#">FL APPL LED LIGHTING EN</a><br><a href="#">FL INDUSTR.CONTROLS EN</a><br><a href="#">FL MACHINE SAFETY EN</a><br><a href="#">FL HEATING ELECTR EN</a><br><a href="#">FL APPL INVERTER EN</a><br><a href="#">FL BASE STATION EN</a><br><a href="#">FL ELEVATOR EN</a><br><a href="#">FL POWER SUPPLY EN</a><br><a href="#">FL 72H SAMPLE SER EN</a><br><a href="#">PO OMNIMATE EN</a> |
| Engineering Data                            | <a href="#">STEP</a>  |


---

**OMNIMATE Signal - series BC/SC 3.81  
SCDN 3.81/30/90G 3.2SN OR BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensional drawing**

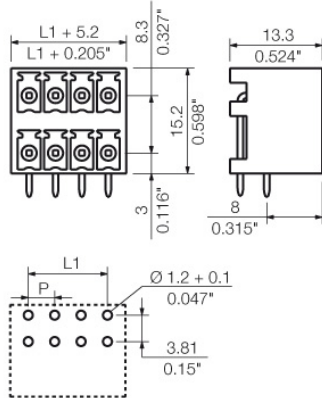

## Data sheet

### OMNIMATE Signal - series BC/SC 3.81 SCDN 3.81/30/90G 3.2SN OR BX

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Accessories

### Coding elements



**Only connects what is supposed to be connected:  
the right connection at the right place.**

Coding elements and locking devices clearly assign connecting elements during the manufacturing process and operation



The coding elements and locking devices are inserted prior to assembly or during the cable assembly phase. The Weidmüller alternative: configure online using the variant configurator to precode prior to delivery.

Incorrect assembly on the circuit board and incorrect plugging of connecting elements is no longer possible. The advantage: no troubleshooting during manufacture and no operational errors by the user.



### General ordering data

|            | Type                       | Version   | Product data | Packaging |
|------------|----------------------------|---|--------------|-----------|
| Type       | SC-SMT 3.81 KO GY BX       |   |              |           |
| Order No.  | <a href="#">1968900000</a> | PCB plug-in connector, Accessories, Coding element, grey, Number of |              | Box       |
| GTIN (EAN) | 4032248772865              | poles: 6  |              |           |
| Qty.       | 100 pc(s).                 |   |              |           |

SCDN 3.81/.../90F 3.2...

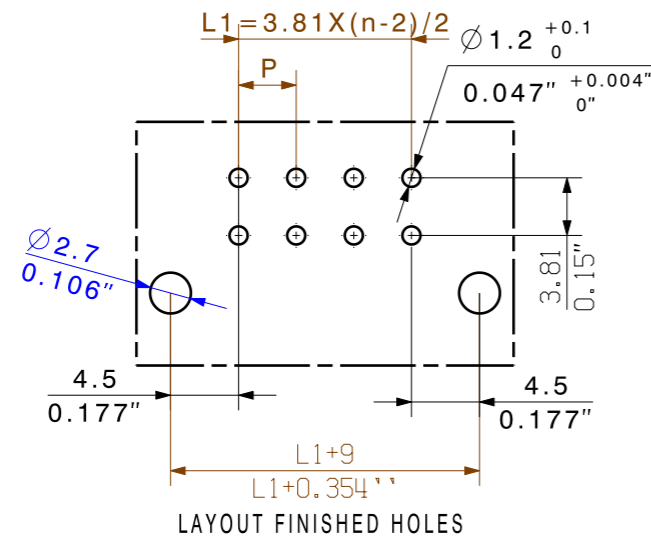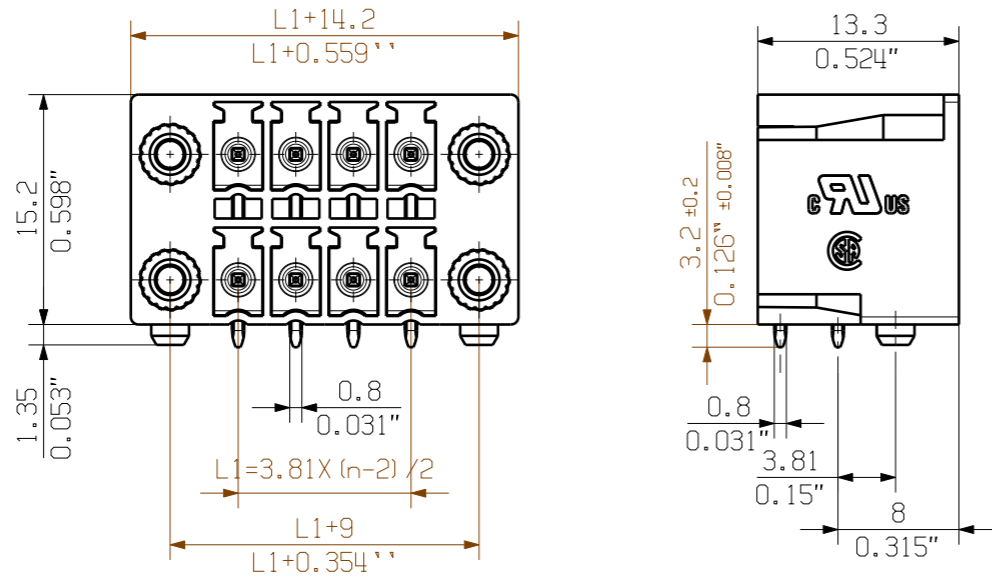

SCDN 3.81/.../90G 3.2...

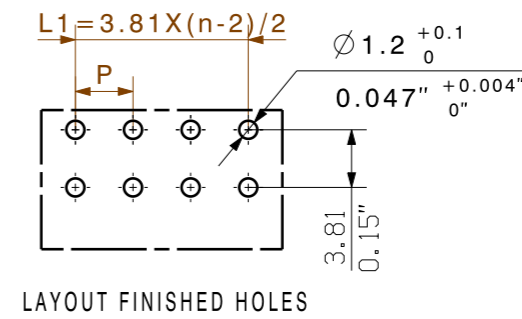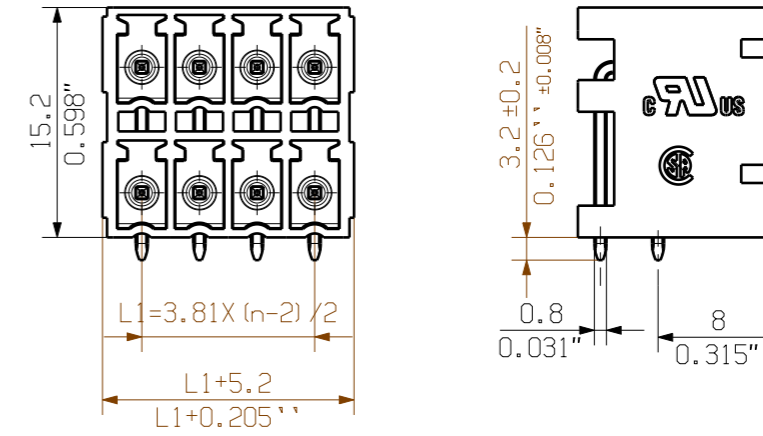

NOTE:  
n=NO OF POLES  
P=PITCH

KUNDENZEICHNUNG  
CUSTOMER DRAWING

|    |         |           |
|----|---------|-----------|
| 32 | 57.15   | 2.250     |
| 30 | 53.34   | 2.100     |
| 28 | 49.53   | 1.950     |
| 26 | 45.72   | 1.800     |
| 24 | 41.91   | 1.650     |
| 22 | 38.10   | 1.500     |
| 20 | 34.29   | 1.350     |
| 18 | 30.48   | 1.200     |
| 16 | 26.67   | 1.050     |
| 14 | 22.86   | 0.900     |
| 12 | 19.05   | 0.750     |
| 10 | 15.24   | 0.600     |
| 8  | 11.43   | 0.450     |
| 6  | 7.62    | 0.300     |
| 4  | 3.81    | 0.150     |
| n  | L1 [mm] | L1 [inch] |

For the mounting of PCBs, it should be noted that the rated data given in the catalogue relates only to the connection elements. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to VDE 0110. The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the connectors are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

|                                      |                |                             |  |   |  |
|--------------------------------------|----------------|-----------------------------|--|---|--|
| GENERAL TOLERANCE:<br>DIN ISO 2768-m |                | 78721/5<br>06.11.14 MA_J 01 |  | CAT.NO.: .  |  |
| RoHS COMPLIANT                       | MAX. NRN./NOS. | MODIFICATION                |  | <b>Weidmüller</b>   |  |
| DRAWN 08.01.2009 GE_G                |                | DATE                        |  | DRAWING NO. <b>C 46288</b> 03   |  |
| RESPONSIBLE XU_S                     |                | NAME                        |  | SHEET 01 OF 03 SHEETS   |  |
| CHECKED 25.11.2014 ZHOU_N            |                | DATE                        |  | <b>SCDN... 3.81/.../90...</b><br>THR-LOETANSCHLUSS STIFTLISTE<br>THR SOLDER CONNECTION PIN HEADER |  |
| APPROVED XU_S                        |                | NAME                        |  |   |  |
| SCALE: 3/1                           |                | DATE                        |  | PRODUCT FILE: SCDN 3.81   |  |
| SUPERSEDES: .                        |                | NAME                        |  | 7086  |  |

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATET.  
 ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTERENTRAGUNG VORBEHALTEN.  
 THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.  
 OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. WEIDMUELLER EXCLUSIVELY RESERVES THE RIGHT TO FILE FOR PATENTS, UTILITY MODELS OR DESIGNS.  
 © WEIDMUELLER INTERFACE GmbH & Co.KG

## Recommended wave soldering profiles

**Weidmüller Interface GmbH & Co. KG**  
 Klängenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

### Single Wave:



### Double Wave:



### Wave soldering profiles

Wired connection elements should be processed in accordance with the DIN EN 61760-1 standard. We have included two recommendations for practical wave soldering profiles, with which Weidmüller PCB terminals and connectors are qualified.

When choosing a suitable profile for your application, the following factors also need to be considered:

- PCB thickness
- Proportion of Cu in the layers
- Single/double-sided assembly
- Product range
- Heating and cooling rates

The single and double wave profiles each indicate the recommended operating range, including the maximum soldering temperature of 260°C. In practice, the maximum soldering temperature is quite often well below the above maximum profile.