

**SAIL-M12G-PB-1.5E****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

**General ordering data**

Type	SAIL-M12G-PB-1.5E
Order No.	<a href="#">1058530150</a>
Version	Bus line, One end without connector, M12, Number of poles: 2, 1.5 m, pin, straight, Shielded: Yes, LED: No, Sheath material: PVC, Halogen: Yes
GTIN (EAN)	4032248800117
Qty.	1 pc(s).

Creation date May 1, 2020 12:46:31 PM CEST

**SAIL-M12G-PB-1.5E****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 108 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

Number of poles	2	Wire cross section	PUR 0.25 mm <sup>2</sup> / PVC 0.34 mm <sup>2</sup>
Outside diameter	7.8 mm ± 0.2 mm	Cable length	1.5 m
Shielded	Yes	Insulation	PVC
Colour coding	red, green	Sheath material	PVC
Sheathing colour	violet	Halogen	Yes
Temperature range, moving	-5...60 °C	Temperature range, stationary	-20...70 °C
Suitable for cable carriers	No	Bending radius, min., stationary	18 x cable diameter
Bending radius, min., moving	9 x cable diameter	Resistant to welding beads	No
Hybrid cable	No	Irradiation crosslinked	No
Configurable cable length	No		

**General technical data**

Version	pin, straight	Connection thread	M12
Housing main material	PUR	Threaded ring material	Brass, nickel-plated
Coding	B	Protection degree	IP67
Contact surface	Gold-plated	LED	No
Rated voltage	250 V	Rated current	4 A
Insulation strength	10 <sup>8</sup> Ω	Temperature range of housing	-25...+80 °C
Tightening torque	M12: 0.8 - 1.2 Nm	Plugging cycles	≥ 100
Pollution severity	3	Plugging cycles jumpered	No

**Standards**

Certificate no. (cULus) E307231

**Classifications**

ETIM 6.0	EC002599	ETIM 7.0	EC002599
eClass 9.0	27-06-03-08	eClass 9.1	27-06-03-08
eClass 10.0	27-06-03-08		

**Approvals**

Approvals



ROHS

Conform

**SAIL-M12G-PB-1.5E**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Downloads**

---

Brochure/Catalogue	<a href="#">CAT 8 SAI 15/16 EN</a> <a href="#">FL FIELDWIRING EN</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>

---


**Data sheet**

**SAIL-M12G-PB-1.5E**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com


**Drawings**

**Dimensioned drawing**

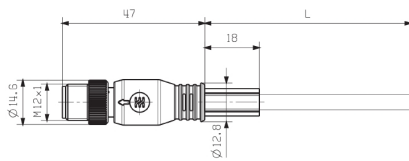


Male, straight

**Pole scheme**



Pin

**Wiring diagram**



**The ideal tool: Screwty<sup>®</sup> with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F