

**HDC insert  
HDC HP 550 M 95**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com



The RockStar® HighPower system, with its completely newly developed and coordinated components in three and four pin versions, represents a novel product solution for pluggable energy transmission – failure-free

The RockStar® HighPower system has a modular design and offers the customer a multitude of product solutions for all kinds of application sites and requirements.

The RockStar® HighPower end-wall connector is impact-resistant, water and dust-proof and was built to comply with DIN EN 61373 CAT 1b (bogie) requirements.

The overall structure has been adapted to the confined space of wagon-to-wagon coupling - small, light and powerful

**General ordering data**

Type	HDC HP 550 M 95
Order No.	<a href="#">1079790000</a>
Version	HDC insert, Pin, 3000 V, 550 A, Crimp connection, Size: 550
GTIN (EAN)	4032248841653
Qty.	1 pc(s).

## Data sheet

### HDC insert HDC HP 550 M 95

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Length	91 mm	Length (inches)	3.583 inch
Net weight	198 g	Diameter	43 mm

### Temperatures

Limit temperature	-50 °C ... 120 °C
-------------------	-------------------

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### General data

Colour	black	Contact diameter, male Ø	18 mm
Material	Copper alloy	Production methods	turned
Series	HighPower	Stripping length, rated connection	30 mm
Surface finish	Silver passivated	Type	Pin
Type of connection	Crimp connection	Version insert	HighPower 550 A
Volume resistance	≤ 0.1 mΩ		

### Power contact

Rated current (DIN EN 61984), power contact	550 A	Rated impulse voltage (DIN EN 61984), power contact	15 kV
Rated voltage (DIN EN 61984), power contact	3,000 V	Stripping length, performance contact	30 mm
Type of connection, power contact	Crimp connection		

### Classifications

ETIM 6.0	EC000796	ETIM 7.0	EC000796
eClass 9.0	27-44-02-04	eClass 9.1	27-44-02-04
eClass 10.0	27-44-02-04	UNSPSC	30-21-18-01

### Approvals

Approvals



ROHS Conform

### Downloads


Brochure/Catalogue	<a href="#">CAT 3 HDC 17/18 EN</a> <a href="#">FL FIELDWIRING EN</a>
Engineering Data	<a href="#">EPLAN</a>
Engineering Data	<a href="#">STEP</a>

**Data sheet**

**HDC insert  
HDC HP 550 M 95**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

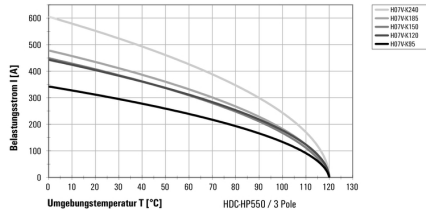

**HDC insert  
HDC HP 550 M 95**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Accessories****Crimping tools**

Weidmüller offers a variety of crimping tools, no-contact tools, and fibre optic tools.

**General ordering data**

Type	MTR 300	Version
Order No.	<a href="#">9021390000</a>	Pressing tool, Crimping tool, universal hand presses, 10mm <sup>2</sup> , 300mm <sup>2</sup>
GTIN (EAN)	4008190497057	
Qty.	1 pc(s).	