

**SAIL-VSA-M8G-3-1.5U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Weidmüller can supply valve plugs as connecting lines with M12 plugs and one end without connector. The status of the valve plug is shown by an LED. Every valve plug is fitted with a protective circuit. The Weidmüller range includes valve plugs of type A, B and C to DIN and industry standards. In the plugged condition they achieve IP 67 class of protection. The outlet direction is also a decisive factor: Weidmüller can also supply 0° versions, i.e. the cable outlet direction is located at the PE contact.

**General ordering data**

Type	SAIL-VSA-M8G-3-1.5U
Order No.	<a href="#">1099760150</a>
Version	Valve plug, Straight plug - valve plug, A
GTIN (EAN)	4032248874682
Qty.	1 pc(s).

Creation date May 1, 2020 7:35:00 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

## SAIL-VSA-M8G-3-1.5U

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

### Dimensions and weights

Net weight 76 g

### Temperatures

Operating temperature range, max.	80 °C	Operating temperature range, min.	-25 °C
Operating temperature, max.	80 °C	Operating temperature, min.	-25 °C

### Environmental Product Compliance

REACH SVHC Lead 7439-92-1

### Technical specifications for cable

Number of poles	3	Core cross-section	0.5 mm <sup>2</sup>
Cable length	1.5 m	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-25...80 °C	Temperature range, stationary	-50...80 °C
Suitable for cable carriers	Yes		

### General technical data

Version	Straight plug - valve plug	Connection thread	M8
Threaded ring material	Brass, nickel-plated	Coding	Design A (18 mm), M8 = none
Protection degree	IP67, when screwed in	Contact surface	tinned
LED	Yes	Rated voltage	24 V
Rated current	4 A	Temperature range of housing	-25...+80 °C
All valve plugs are fitted with protective circuits	Suppressor diode		

### Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
eClass 9.0	27-06-03-12	eClass 9.1	27-06-03-11
eClass 10.0	27-06-03-12		

### Approvals

Approvals



ROHS Conform

### Downloads


Brochure/Catalogue [CAT 8 SAI 15/16 EN](#)  
[FL FIELDWIRING EN](#)

**SAIL-VSA-M8G-3-1.5U**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**


**Dimensioned drawing**

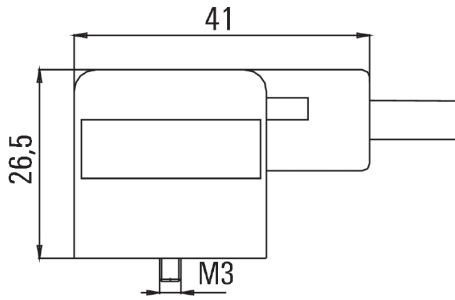


**Dimensioned drawing**



**Pole scheme**

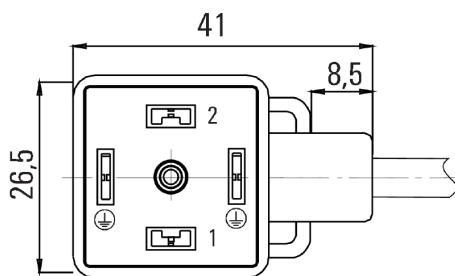

**Pole scheme**



**Wiring diagram**

