

SAIL-M8GM8SG-4S0.1UIE

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

General ordering data

Type	SAIL-M8GM8SG-4S0.1UIE
Order No.	1160930010
Version	Bus line, Connecting line, M8 / M8, Number of poles: 4, 0.1 m, Male, straight - male, straight, Shielded: Yes, LED: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4032248949045
Qty.	1 pc(s).

Creation date May 2, 2020 9:09:34 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

SAIL-M8GM8SG-4S0.1UIE

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 16 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Number of poles	4	Core cross-section	0.15 mm ²
Outside diameter	4.8 mm ± 0.3 mm	Cable length	0.1 m
Shielded	Yes	Insulation	PP
Colour coding	blue, orange, white / blue, white / orange	Sheath material	PUR
Sheathing colour	green	Halogen	No
Temperature range, stationary	-40...80 °C	Outer cladding in accordance with UL AWM style	20963 (80 °C / 30 V)
Suitable for cable carriers	Yes	Bending radius, min., stationary	4 x cable diameter
Bending radius, min., moving	7.5 x cable diameter	Acceleration	5 m/s ²
Speed	180 m/min	Bending cycles	5 Mio
Resistant to welding beads	No	Hybrid cable	No
Irradiation crosslinked	No	Configurable cable length	No

General technical data

Version	Male, straight - male, straight	Connection thread	M8 / M8
Housing main material	PUR	Threaded ring material	Brass, nickel-plated
Coding	none	Protection degree	IP67
Contact surface	Gold-plated	LED	No
Rated voltage	30 V	Rated current	4 A
Insulation strength	10 ⁸ Ω	Temperature range of housing	-25...+80 °C
Tightening torque	M8: 0.5 - 0.6 Nm	Plugging cycles	≥ 100
Pollution severity	3	jumpered	No

Classifications

ETIM 6.0	EC002599	ETIM 7.0	EC002599
eClass 9.0	27-06-03-08	eClass 9.1	27-06-03-08
eClass 10.0	27-06-03-08		

Approvals

Approvals



ROHS Conform

Downloads

Brochure/Catalogue	CAT 8 SAI 15/16 EN FL FIELDWIRING EN
Engineering Data	EPLAN.WSCAD

Creation date May 2, 2020 9:09:34 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Data sheet


SAIL-M8GM8SG-4S0.1UIE

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Dimensioned drawing

Dimensioned drawing


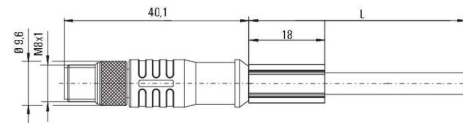


Male, straight

Male, straight

Pole scheme

Pole scheme

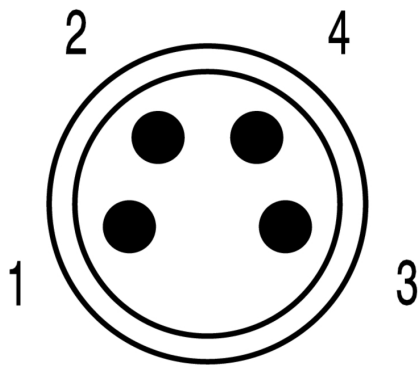


Pin

Male connector

Wiring diagram

The ideal tool: Screwty® with torque function

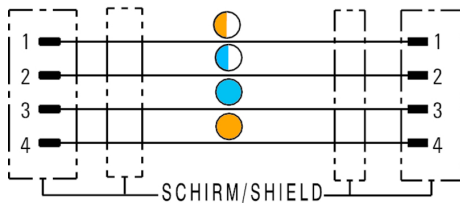

Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F