

**VPMS Ex (ex blanking plug, brass)
VP M16 EXE MS**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



For sealing surplus threaded holes to maintain the IP class of protection

General ordering data

Type	VP M16 EXE MS
Order No.	1210890000
Version	VPMS Ex (ex blanking plug, brass), Blanking plug, M 16, 12 mm, Brass, nickel-plated
GTIN (EAN)	4032248991969
Qty.	50 pc(s).

Creation date May 2, 2020 2:15:31 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Data sheet

VPMS Ex (ex blanking plug, brass) VP M16 EXE MS

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	15 mm	Length (inches)	0.591 inch
Net weight	23.94 g		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1; 96-45-7 Imidazolidine-2-thione
------------	---

General information

Material	Brass, nickel-plated	External thread	M 16
Pitch of thread	1.5 mm	Length of thread	12 mm
AF size 1	18 mm	Protection degree	IP54, IP64, IP68
Operating temperature range, min.	-40 °C	Operating temperature range, max.	100 °C
O-Ring	NBR	Torque for cap nut, min.	3.6 Nm
Torque for cap nut, max.	5.4 Nm	Torque for connecting adapter, min.	9 Nm
Torque for connecting adapter, max.	18 Nm		

Classifications

ETIM 6.0	EC000451	ETIM 7.0	EC000451
eClass 9.0	27-14-44-25	eClass 9.1	27-14-44-35
eClass 10.0	27-14-44-25		

Approvals

Approvals



ROHS Conform

Downloads


Brochure/Catalogue	CAT 5 ENCL 17/18 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP

Data sheet

**VPMS Ex (ex blanking plug, brass)
VP M16 EXE MS**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

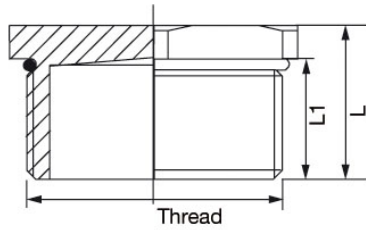

**VPMS Ex (ex blanking plug, brass)
VP M16 EXE MS**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Brass nuts, standard, nickel-plated



Weidmüller has a variety of different cable and wire entry systems in the Portfolio: with different designs of plastic, brass and stainless steel cable glands in the IP66, 67, 68 or IP69k protection classes. As a complete alternative to cable glands, pre-assembled cables with modular multi-wire or multi-cable entry systems can be simply and quickly inserted into electrical equipment. Last but not least, Weidmüller offers EX-certified cable glands and cable/wire entry systems.

- Cable glands made from plastic and brass
- EMC screwed joints
- for areas at risk of explosion
- VDE, CSA and UL approvals

General ordering data

Type	SKMU M16 MS	Version
Order No.	1736990000	SKMU MS (brass locknut), Locknut, M 16, 2.8 mm, Brass, nickel-
GTIN (EAN)	4008190956462	plated
Qty.	100 pc(s).	

GWDR - Polyethylene flat gasket

The range of cable glands is rounded off by a large number of accessories.



General ordering data

Type	GWDR M16-PO	Version
Order No.	1777930000	GWDR PO (flat gasket - polyethylene), Sealing ring, M 16, Polyethylene
GTIN (EAN)	4032248158195	
Qty.	50 pc(s).	

Data sheet**VPMS Ex (ex blanking plug, brass)
VP M16 EXE MS**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Blanking plugs**

For sealing surplus threaded holes to maintain the IP class of protection

General ordering data

Type	GWDR M16-NP	Version
Order No.	1736230000	GWDR NP (flat gasket - neoprene), Sealing ring, M 16, Neoprene
GTIN (EAN)	4008190956028	
Qty.	50 pc(s).	