

HDC enclosures HDC 24B ALU

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 24B ALU
Order No.	1213900000
Version	HDC enclosures, Size: 8, Protection degree: IP65, Open base, End-locking clamp, lower side, Standard
GTIN (EAN)	4008190176303
Qty.	1 pc(s).

**HDC enclosures
HDC 24B ALU**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	74.4 mm	Width (inches)	2.929 inch
Height	29.3 mm	Height (inches)	1.154 inch
Mounting dimension - width	130 mm	Mounting dimension - height	32 mm
Net weight	177 g		

Temperatures

Limit temperature -40 °C ... 125 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1, DIBP 84-69-5, Potassium perfluorobutane sulfonate 29420-49-3

Dimensions

Height of base B1	5.3 mm	Height of housing B	29.3 mm
Hole pitch length A2	130 mm	Total length housing	120 mm
Width base C1	47 mm	Width housing C	43 mm

General data

EMC housings	No	Housing main material	diecast aluminium
Material of locking element	Stainless steel, rust-proof	Protection degree	IP65
Surface finish	Powder coating	Tightening torque	1.2 Nm

Version

Clamp version	End-locking clamp	Cover	without cover
Design	Standard	Design of housing	Open base
Design of locking system	End-locking clamp, lower side	Sealing	NBR
Size	8	Suitable for ModuPlug®	Yes
Tightening torque	1.2 Nm	Top part/bottom part/lid	lower part
Type	Bulkhead (feed-through)		

Classifications

ETIM 6.0	EC000437	ETIM 7.0	EC000437
eClass 9.0	27-44-02-02	eClass 9.1	27-44-02-02
eClass 10.0	27-44-02-02	UNSPSC	30-21-18-01

Approvals

Approvals



Data sheet**HDC enclosures
HDC 24B ALU**

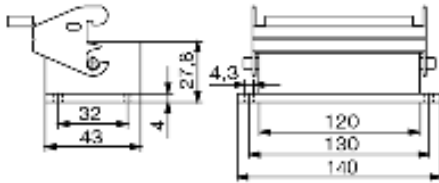
Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Downloads**

Brochure/Catalogue	CAT 3 HDC 17/18 EN FL FIELDWIRING EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
Technical Documentation	1213900000_HDC_24B_ALU_STP_Blatt_1.pdf

Data sheet**HDC enclosures
HDC 24B ALU**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

**HDC enclosures
HDC 24B ALU**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories**Hood, Cable Entry at top**

The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 64D TOLU 1M32G	Version
Order No.	1786860000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, high, Size of cable entries: M 32
GTIN (EAN)	4032248204106	
Qty.	1 pc(s).	
Type	HDC 24B TOLU 1M25G	Version
Order No.	1787860000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 25
GTIN (EAN)	4032248205301	
Qty.	1 pc(s).	
Type	HDC 24B TOLU 1PG21G	Version
Order No.	1662540000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 21
GTIN (EAN)	4008190419066	
Qty.	1 pc(s).	
Type	HDC 64D TOLU 1PG21G	Version
Order No.	1662610000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, high, Size of cable entries: PG 21
GTIN (EAN)	4008190419134	
Qty.	1 pc(s).	
Type	HDC 24B TOLU 1PG29G	Version
Order No.	1662550000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 29
GTIN (EAN)	4008190419073	
Qty.	1 pc(s).	
Type	HDC 64D TOLU 1PG29G	Version
Order No.	1662630000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, high, Size of cable entries: PG 29
GTIN (EAN)	4008190419158	
Qty.	1 pc(s).	
Type	HDC 24B TOLU 1M32G	Version
Order No.	1787850000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205295	
Qty.	1 pc(s).	
Type	HDC 64D TOLU 1M40G	Version
Order No.	1983470000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from top, Plug housing, End-locking clamp, lower side, high, Size of cable entries: M 40
GTIN (EAN)	4032248687916	
Qty.	1 pc(s).	

**HDC enclosures
HDC 24B ALU**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Type	HDC 64D TOLU 1M25G	Version
Order No.	1786870000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from
GTIN (EAN)	4032248204113	top, Plug housing, End-locking clamp, lower side, high, Size of cable
Qty.	1 pc(s).	entries: M 25

XXL plug housing, cable entry on top



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 64D TOLU 1M50G	Version
Order No.	1111170000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from
GTIN (EAN)	4032248100125	top, Plug housing, End-locking clamp, lower side, Standard, Size of
Qty.	1 pc(s).	cable entries: M 50

HDC enclosures HDC 24B ALU

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Hood, Cable Entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 64D TSLU 1M40G	Version
Order No.	1804610000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, high, Size of cable entries: M 40
GTIN (EAN)	4032248267538	
Qty.	1 pc(s).	
Type	HDC 64D TSLU 1PG29G	Version
Order No.	1662490000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, high, Size of cable entries: PG 29
GTIN (EAN)	4008190419011	
Qty.	1 pc(s).	
Type	HDC 64D TSLU 1M32G	Version
Order No.	1786810000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, high, Size of cable entries: M 32
GTIN (EAN)	4032248204052	
Qty.	1 pc(s).	
Type	HDC 24B TSLU 1M25G	Version
Order No.	1787800000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 25
GTIN (EAN)	4032248205240	
Qty.	1 pc(s).	
Type	HDC 24B TSLU 1PG29G	Version
Order No.	1662410000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 29
GTIN (EAN)	4008190418939	
Qty.	1 pc(s).	
Type	HDC 24B TSLU 1M32G	Version
Order No.	1787790000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: M 32
GTIN (EAN)	4032248205233	
Qty.	1 pc(s).	
Type	HDC 24B TSLU 1PG21G	Version
Order No.	1662390000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, Standard, Size of cable entries: PG 21
GTIN (EAN)	4008190418915	
Qty.	1 pc(s).	
Type	HDC 64D TSLU 1PG21G	Version
Order No.	1662470000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from side, Plug housing, End-locking clamp, lower side, high, Size of cable entries: PG 21
GTIN (EAN)	4008190418991	
Qty.	1 pc(s).	

**HDC enclosures
HDC 24B ALU**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

XXL plug housing, cable entry sideways



The special die-cast alloy and the multi-layered surface sealing provide complete protection for the HDC housings.

The cleverly designed interlock system is manufactured from stainless steel. This guarantees a long lifespan with high resistance to corrosion and impact.

The housing interlock system provides integrated safety. Our unique, patented spring system provides the housing interlock with a secure grip and prevents accidental opening.

The laser marking allows for easy and quick identification. Each housing is permanently labelled with a laser marking so that each product can be quickly designated and positioned.

Weidmüller RockStar® IP 65 / NEMA Type 4X housings - your first choice for industrial housings with IP 65 protection.

General ordering data

Type	HDC 64D TSLU 1M50G	Version	
Order No.	1111150000	HDC enclosures, Size: 8, Protection degree: IP65, Cable entry from	
GTIN (EAN)	4032248100118	side, Plug housing, End-locking clamp, lower side, Standard, Size of	
Qty.	1 pc(s).	cable entries: M 50	