

**SAI-M23-BE-19-F-PE****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

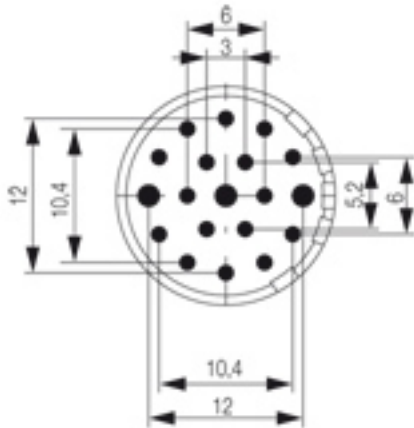

The M23 round plug-in connectors offer a high number of mating cycles, high current-carrying capacity and high contact-density coupled with minimum dimensions. Enclosures, inserts and crimp contacts need to be ordered separately.

**General ordering data**

Type	SAI-M23-BE-19-F-PE
Order No.	<a href="#">1224440000</a>
Version	Sensor/Actuator plug-in connector
GTIN (EAN)	4050118008326
Qty.	1 pc(s).

## SAI-M23-BE-19-F-PE

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

## Technical data

## Dimensions and weights

Net weight 14 g

## Temperatures

Operating temperature, max. 125 °C Operating temperature, min. -40 °C

## Environmental Product Compliance

REACH SVHC Lead 7439-92-1

## Standards

Certificate No. (UR) E344862

## General data

Coding	none	Conductor O.D.	-
Connection thread	M23	Contact material	Copper-Zinc alloy
Contact number / diameter	16 x 1 mm + 3 x 1.5 mm	Contact surface	Gold-plated
Fire behaviour	V-0	Housing main material	Thermoplastic polyamide PA 6, PBT
Insulation strength	> 10 <sup>6</sup> mΩ	Number of poles	19
Plugging cycles	> 1000	Rated current	8 A / 1 mm + 10 A / 1,5 mm
Type of connection	Solder connection		

## Classifications

ETIM 6.0	EC000438	ETIM 7.0	EC000438
eClass 9.1	27-44-02-05	eClass 10.0	27-44-02-23

## Product information

Product information Enclosures, inserts and crimp contacts need to be ordered separately.

## Approvals

Approvals



ROHS Conform

## Downloads

Brochure/Catalogue [CAT 8 SAI 15/16 EN](#)  
[FL FIELDWIRING EN](#)