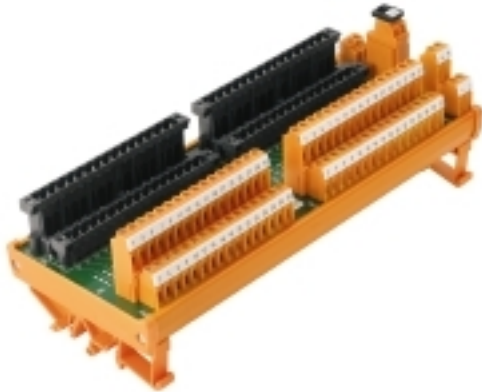


**RS**  
**FTA-C300-32DIO-HV-S-CT****Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

Digital input/output direct FTAs for Honeywell C300 IOTAs.

Passive interfaces (FTA) for connecting the Honeywell C300 digital IOTAs.

- Clearly labelled: Same connector and position on the FTA and on the IOTA.
- The light indicator (LED) indicates the position of the switch.
- Possibility of feeding the IOTA from the FTA (fuse protected).
- Fuse protection per channel (optional).
- Screw or tension clamp connection.

**General ordering data**

Delivery status	<b>This article will no longer be available in the future.</b>
Available until	2019-12-02
Type	FTA-C300-32DIO-HV-S-CT
Order No.	<a href="#">1311710000</a>
Version	Interface, RS
GTIN (EAN)	4050118114126
Qty.	1 pc(s).

Creation date May 3, 2020 1:15:52 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**RS  
FTA-C300-32DIO-HV-S-CT**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

Length	216 mm	Length (inches)	8.504 inch
Width	87 mm	Width (inches)	3.425 inch
Height	65 mm	Height (inches)	2.559 inch
Net weight	398 g		

**Temperatures**

Operating temperature, max.	50 °C	Operating temperature, min.	-25 °C
Storage temperature, max.	60 °C	Storage temperature, min.	-40 °C
Operating temperature	-25...50 °C	Storage temperature	-40...60 °C

**Environmental Product Compliance**

REACH SVHC	Lead 7439-92-1
------------	----------------

**General data**

LED status display per channel	No	Type of test point	No
Fuse per channel	No	LED status of the supply voltage	yellow
Power supply fuse	630 mA		

**Connection data**

Connection on control side	SLDV-THR 5.08
----------------------------	---------------

**Ratings data**

Operating voltage	≤ 250 V AC	Max. current per channel	1 A
-------------------	------------	--------------------------	-----

**Insulation coordination (EN50178)**

Rated insulation voltage	< 250 V AC	Surge voltage category	II
Pollution severity level	2	Insulation test voltage	1.2 kVAC

**Connection field**

Clamping range, min.	0.13 mm <sup>2</sup>	Clamping range, max.	6 mm <sup>2</sup>
----------------------	----------------------	----------------------	-------------------

**Supply connection**

Clamping range, min.	0.13 mm <sup>2</sup>	Clamping range, max.	6 mm <sup>2</sup>
----------------------	----------------------	----------------------	-------------------

**Classifications**

ETIM 6.0	EC002780	ETIM 7.0	EC002780
eClass 9.0	27-14-11-52	eClass 9.1	27-24-22-16
eClass 10.0	27-14-11-52		

**Approvals**

Approvals



Creation date May 3, 2020 1:15:52 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

2

**Data sheet**

**RS**  
**FTA-C300-32DIO-HV-S-CT**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

