

## Automation Products - u-remote IP20 UR20-4DI-P

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

### Product image



### Digital input modules P- or N-switching; Reverse polarity protection, up to 3-wire +FE

Digital input modules from Weidmüller are available in different versions and are used primarily to receive binary control signals from sensors, transmitters, switches or proximity switches. Thanks to their flexible design, they will satisfy your need for well co-ordinated project planning with reserve potential.

All modules are available with 4, 8 or 16 inputs and comply fully with IEC 61131-2. The digital input modules are available as P- or N-switching variant. The digital inputs are for Type 1 and Type 3 sensors in accordance with the standard. With a maximum input frequency of up to 1 kHz, they are used in many different applications. The variant for PLC interface units enables rapid cabling to the proven Weidmüller interface sub-assemblies using system cables. This ensures rapid incorporation into your overall system. Two modules with a timestamp function are able to capture binary signals and to provide a timestamp in 1  $\mu$ s resolution. Further solutions are possible with

the module UR20-4DI-2W-230V-AC which works with accurate current up to 230V as an input signal.

The module electronics supply the connected sensors from the input current path ( $U_{IN}$ ).

### General ordering data

|            |  |
|------------|--|
| Type       | UR20-4DI-P   |
| Order No.  | <a href="#">1315170000</a>                                 |
| Version    | Remote I/O module, IP20, Digital signals, Input, 4-channel |
| GTIN (EAN) | 4050118118254  |
| Qty.       | 1 pc(s).   |

**Automation Products - u-remote IP20  
UR20-4DI-P**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

|                             |         |                 |            |
|-----------------------------|---------|-----------------|------------|
| Width                       | 11.5 mm | Width (inches)  | 0.453 inch |
| Height                      | 120 mm  | Height (inches) | 4.724 inch |
| Depth                       | 76 mm   | Depth (inches)  | 2.992 inch |
| Mounting dimension - height | 128 mm  | Net weight      | 87 g       |

**Temperatures**

|                             |                   |                             |                   |
|-----------------------------|-------------------|-----------------------------|-------------------|
| Operating temperature, max. | 60 °C             | Operating temperature, min. | -20 °C            |
| Storage temperature, max.   | 85 °C             | Storage temperature, min.   | -40 °C            |
| Operating temperature       | -20 °C ... +60 °C | Storage temperature         | -40 °C ... +85 °C |

**Environmental Product Compliance**

|            |                |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

**digital inputs**

|                              |        |                          |                             |
|------------------------------|--------|--------------------------|-----------------------------|
| Individual channel diagnosis | No     | Input filter             | configurable                |
| Input voltage, high          | > 11 V | Input voltage, low       | < 5 V                       |
| Module diagnosis             | Yes    | Number of digital inputs | 4                           |
| Reverse polarity protection  | Yes    | Sensor connection        | 2-wire, 3-wire, 3-wire + FE |
| Sensor supply                | Yes    | Type                     | Types 1 and 3, EN 61131-2   |

**Connection data**

|  |                      |  |                      |
|--|----------------------|--|----------------------|
| Type of connection                                   | PUSH IN              | Wire connection cross section, finely stranded, max. | 1.5 mm <sup>2</sup>  |
| Wire connection cross-section, finely stranded, min. | 0.14 mm <sup>2</sup> | Wire cross-section, finely stranded, max. (AWG)      | AWG 16               |
| Wire cross-section, finely stranded, min. (AWG)      | AWG 26               | Wire cross-section, solid, max.                      | 1.5 mm <sup>2</sup>  |
| Wire cross-section, solid, max. (AWG)                | AWG 16               | Wire cross-section, solid, min.                      | 0.14 mm <sup>2</sup> |
| Wire cross-section, solid, min. (AWG)                | AWG 26               |  |                      |

**General data**

|                           |  |                          |  |
|---------------------------|--|--------------------------|--|
| Air humidity (operation)  | 10% to 95%, non-condensing as per DIN EN 61131-2                       | Air humidity (storage)   | 10% to 95%, non-condensing as per DIN EN 61131-2   |
| Air humidity (transport)  | 10% to 95%, non-condensing as per DIN EN 61131-2                       | Air pressure (operation) | ≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2  |
| Air pressure (storage)    | 1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2 | Air pressure (transport) | 1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2   |
| Pollution severity        | 2  | Shock                    | 15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27   |
| Surge voltage category    | II   | Test voltage             | 500 V  |
| UL 94 flammability rating | V-0  | Vibration resistance     | 5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6 |

**Automation Products - u-remote IP20  
UR20-4DI-P**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data****Power supply**

|   |      |   |  |
|---|------|---|--|
| Current consumption from I <sub>IN</sub> (power segment of the field bus coupler), typ. | 8 mA | Current consumption from I <sub>IN</sub> (the respective power segment) | < 10 mA                                  |
| Reverse polarity protection   | Yes  | Voltage supply  | 24 V DC +20 %/ -15 %, via the system bus |

**System data**

|                    |                                    |  |  |
|--------------------|------------------------------------|--|--|
| Diagnostic data    | 1 Bit                              | Field bus protocol                     | CANopen, DeviceNet, EtherCAT, EtherNet/IP, Modbus/TCP, PROFINET IRT, PROFIBUS DP-V1, POWERLINK |
| Galvanic isolation | 500 V DC between the current paths | Interface                              | u-remote system bus  |
| Module type        | Digital input module               | Possible connection                    | 2-wire, 3-wire, 3 conductor FES, Single-conductor  |
| Process data       | 4 Bit                              | Transmission speed of system bus, max. | 48 Mbit  |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC001597    | ETIM 7.0   | EC001597    |
| eClass 9.0  | 27-24-26-02 | eClass 9.1 | 27-24-26-02 |
| eClass 10.0 | 27-24-26-02 |            |             |

**Approvals**

Approvals

**WATEXIECEX**

ROHS Conform

**Downloads**

|   |  |
|---|--|
| Approval/Certificate/Document of Conformity | <a href="#">Declaration of Conformity</a><br><a href="#">Compass safe distance certificate</a><br><a href="#">Lloyds Register certificate</a><br><a href="#">DNV/GL certificate</a><br><a href="#">ABS certificate</a><br><a href="#">RINA certificate</a><br><a href="#">Bureau Veritas - Type Approval Certificate</a><br><a href="#">PRS (Polish Register of Shipping)</a><br><a href="#">NIPPON KAIJI KYOKAI Certificate</a> |
| Engineering Data                            | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>   |
| Engineering Data                            | <a href="#">STEP</a>   |
| User Documentation                          | <a href="#">MAN_U-REMOTE_DE</a><br><a href="#">MAN_U-REMOTE_EN</a>   |


Creation date May 3, 2020 1:31:42 AM CEST

**Automation Products - u-remote IP20  
UR20-4DI-P**


**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Drawings**

**Block diagram**

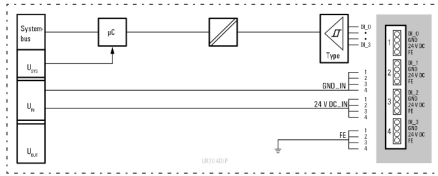

**Connection diagram**

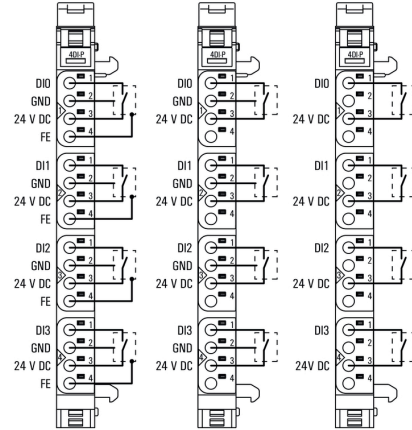


**Automation Products - u-remote IP20  
UR20-4DI-P**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Accessories**

**Blank**



Weidmüller has established new market standards with its MultiCard product line. This system is being continually extended with over 200 variants and by consistently extending the portfolio.

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

**General ordering data**

|            |                            |   |
|------------|----------------------------|---|
| Type       | PM 2.7/2.6 MC NE WS        | Version   |
| Order No.  | <a href="#">1323710000</a> | OMNIMATE Signal - series PM, Pusher markers, 2.7 x 2.6 mm, Pitch in |
| GTIN (EAN) | 4050118126778              | mm (P): 3.50 Weidmueller, white                                     |
| Qty.       | 960 pc(s).                 |   |

**Accessories**



**Potential-distribution modules; system accessory**

A wide range of accessory modules is available for individual requirements of machine and plant engineering. Various potential distribution modules are available for the supply of sensors with 2- to 4-wire connection technology directly from the remote I/O system. These offer 16 "PUSH IN" potential points and supply your application with any auxiliary potential available. An empty module, where the system bus and voltage supply are looped through, allows you to plan expansion slots in a system and to start these up without any interruptions if required.

**General ordering data**

|            |                            |                |
|------------|----------------------------|----------------|
| Type       | UR20-EBK-ACC               | Version        |
| Order No.  | <a href="#">1346610000</a> | End bracket, , |
| GTIN (EAN) | 4050118151596              |                |
| Qty.       | 5 pc(s).                   |                |
| Type       | UR20-SM-ACC                | Version        |
| Order No.  | <a href="#">1339920000</a> | Cover, ,       |
| GTIN (EAN) | 4050118144727              |                |
| Qty.       | 20 pc(s).                  |                |

## Automation Products - u-remote IP20 UR20-4DI-P

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

# Accessories

### Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.


- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

|            |                            |         |   |
|------------|----------------------------|---------|---|
| Type       | DEK 5/8-11.5 MC SDR        | Version |   |
| Order No.  | <a href="#">1341610000</a> |         | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |
| GTIN (EAN) | 4050118146059              |         | Weidmueller, To customer specification                    |
| Qty.       | 100 pc(s).                 |         |   |

### Custom printing



Weidmüller has established new market standards with its MultiCard product line. This system is being continually extended with over 200 variants and by consistently extending the portfolio.

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

|            |                            |         |   |
|------------|----------------------------|---------|---|
| Type       | PM 2.7/2.6 MC SDR          | Version |   |
| Order No.  | <a href="#">1323700000</a> |         | OMNIMATE Signal - series PM, Pusher markers, 2.7 x 2.6 mm, Pitch in |
| GTIN (EAN) | 4050118126761              |         | mm (P): 3.50 Weidmueller, To customer specification                 |
| Qty.       | 192 pc(s).                 |         |   |

## Automation Products - u-remote IP20 UR20-4DI-P

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

## Accessories

### TS 35



#### General ordering data

|            |                            |  |
|------------|----------------------------|--|
| Type       | TS 35X7.5/LL 2M/ST/SZ      | Version  |
| Order No.  | <a href="#">7915060000</a> | Rail, TS 35, TS 35 x 7.5, with slot, Steel, galvanic zinc plated and passivated    |
| GTIN (EAN) | 4032248296279              |  |
| Qty.       | 2 m                        |  |
| Type       | TS 35X7.5 2M/ST/ZN         | Version  |
| Order No.  | <a href="#">0383400000</a> | Rail, TS 35, TS 35 x 7.5, without slot, Steel, galvanic zinc plated and passivated |
| GTIN (EAN) | 4008190088026              |  |
| Qty.       | 2 m                        |  |
| Type       | TS 35X7.5/LL 2M/ST/ZN      | Version  |
| Order No.  | <a href="#">0514500000</a> | Rail, TS 35, TS 35 x 7.5, with slot, Steel, galvanic zinc plated and passivated    |
| GTIN (EAN) | 4008190046019              |  |
| Qty.       | 2 m                        |  |
| Type       | TS 35X7.5/LL 1M/ST/ZN      | Version  |
| Order No.  | <a href="#">0514510000</a> | Rail, TS 35, TS 35 x 7.5, with slot, Steel, galvanic zinc plated and passivated    |
| GTIN (EAN) | 4008190116620              |  |
| Qty.       | 1 m                        |  |
| Type       | TS 35X7.5 2M/CRN           | Version  |
| Order No.  | <a href="#">1747350000</a> | Rail, TS 35, TS 35 x 7.5, without slot, Stainless steel, rust-proof, untreated     |
| GTIN (EAN) | 4032248003372              |  |
| Qty.       | 2 m                        |  |
| Type       | TS 35X7.5 2M/AL/BK         | Version  |
| Order No.  | <a href="#">0330800000</a> | Rail, TS 35, TS 35 x 7.5, without slot, Aluminium, untreated                       |
| GTIN (EAN) | 4008190100650              |  |
| Qty.       | 2 m                        |  |

## Automation Products - u-remote IP20 UR20-4DI-P

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

# Accessories

## Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |   |  |
|------------|----------------------------|---|--|
| Type       | DEK 5/8-11.5 MC NE WS      | Version   |  |
| Order No.  | <a href="#">1341630000</a> | Dekafix, Terminal marker, 5 x 8 mm, Pitch in mm (P): 8.00 |  |
| GTIN (EAN) | 4050118145946              | Weidmueller, white  |  |
| Qty.       | 500 pc(s).                 |   |  |