

DMS PRO**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Only for Europe

Weidmüller torque screwdrivers have an ergonomic design and are therefore ideal for use with one hand. They can be used without causing fatigue in all installation positions. Apart from that, they incorporate an automatic torque limiter and have a good reproducibility accuracy.

General ordering data

Type	DMS PRO
Order No.	1479 120000
Version	Tools, Mounting tool
GTIN (EAN)	4050 118287011
Qty.	1 pc(s).

Creation date May 4, 2020 5:06:45 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

DMS PRO**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Width	276 mm	Width (inches)	10.866 inch
Height	134 mm	Height (inches)	5.276 inch
Depth	46 mm	Depth (inches)	1.811 inch
Weight	500 g	Net weight	480 g

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Technical data

Charging time	30 min
---------------	--------

Electric screwdriver

Battery voltage	3.6 V	Bit holder	1/4" DIN 3126 Form E6.3
Charger input	AC 220-240V~50-60Hz 30W	Charger output	DC 2.8...6V; 4.8A / 30W max.
Charging time	30 min	Idling speed	200 u. 600 min ⁻¹
Max. coupling torque	3 Nm	Rated voltage	3.6 V
Rechargeable batteries	Li-Ion battery	Torque setting, max.	3 Nm
Torque setting, min.	0.36 Nm	Weight	500 g

Classifications

ETIM 6.0	EC001395	ETIM 7.0	EC001395
eClass 9.0	21-05-21-90	eClass 9.1	21-04-04-17
eClass 10.0	21-05-21-90	UNSPSC	27-11-27-20

Approvals

ROHS	Conform
------	---------

Downloads

Approval/Certificate/Document of Conformity	1479120000_DECLARATION_OF_CONFORMITY.pdf
Brochure/Catalogue	CAT 6 TOOLS 15/16 EN
User Documentation	Manual

DMS PRO

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings


Example of use



Example of use



Example of use

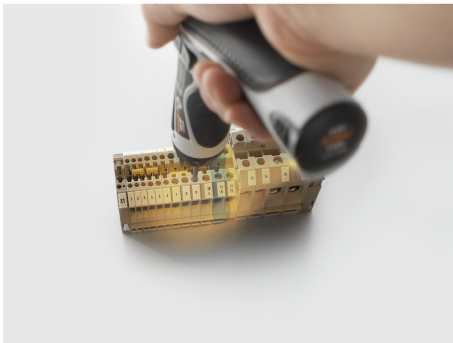

DMS PRO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

E6.3 bits - Pozidriv / Supadriv

1/4" hexagon drive to DIN 3126, form E6.3 for direct machine connection
 Crosshead bits Pozidriv PZ/DIN 5262, 1/4" drive, E 6.3 DIN 3126



General ordering data

Type	BIT E6,3 PZ2X70	Version
Order No.	9024110000	Screwdriver insert, Blade length: 70 mm, Blade size, crosshead: 2
GTIN (EAN)	4008190870706	
Qty.	5 pc(s).	

Type	BIT E6,3 PZ1X70	Version
Order No.	9024100000	Screwdriver insert, Blade length: 70 mm, Blade size, crosshead: 1
GTIN (EAN)	4008190870713	
Qty.	5 pc(s).	

Bit assortment, E6.3

1/4" hexagon drive to DIN 3126, form E6.3 for direct machine connection



General ordering data

Type	BIT-BOX WI DMS 3	Version
Order No.	9024970000	Mounting tool
GTIN (EAN)	4032248068067	
Qty.	1 pc(s).	


DMS PRO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

BE6.3 bits - slotted

1/4" hexagon drive to DIN 3126, form E6.3 for direct machine connection
 Slot-head bits DIN 5264, 1/4" drive, E6.3 DIN 3126



General ordering data

Type	BIT E6,3 1,0X5,5X70	Version
Order No.	9024040000	Screwdriver insert, Blade width (B): 5.5 mm, Blade length: 70 mm,
GTIN (EAN)	4008190852665	Blade thickness (A): 1 mm
Qty.	5 pc(s).	
Type	BIT E6,3 0,6X3,5X70	Version
Order No.	9024020000	Screwdriver insert, Blade width (B): 3.5 mm, Blade length: 70 mm,
GTIN (EAN)	4008190852627	Blade thickness (A): 0.6 mm
Qty.	5 pc(s).	
Type	BIT E6,3 0,4X2,5X70	Version
Order No.	9202750000	Screwdriver insert, Blade width (B): 2.5 mm, Blade length: 70 mm,
GTIN (EAN)	4032248504725	Blade thickness (A): 0.4 mm
Qty.	5 pc(s).	
Type	BIT E6.3 Z 0.8X4.0X39	Version
Order No.	9025590000	Screwdriver insert, Blade width (B): 4 mm, Blade length: 39 mm,
GTIN (EAN)	4008190151935	Blade thickness (A): 0.8 mm
Qty.	10 pc(s).	
Type	BIT E6,3 1,2X6,5X70	Version
Order No.	9202740000	Screwdriver insert, Blade width (B): 6.5 mm, Blade length: 70 mm,
GTIN (EAN)	4032248504718	Blade thickness (A): 1.2 mm
Qty.	5 pc(s).	
Type	BIT E6,3 0,5X3,0X70	Version
Order No.	9024000000	Screwdriver insert, Blade width (B): 3 mm, Blade length: 70 mm,
GTIN (EAN)	4008190852634	Blade thickness (A): 0.5 mm
Qty.	5 pc(s).	
Type	BIT E6,3 0,8X4,0X70	Version
Order No.	9024030000	Screwdriver insert, Blade width (B): 4 mm, Blade length: 70 mm,
GTIN (EAN)	4008190852658	Blade thickness (A): 0.8 mm
Qty.	5 pc(s).	

DMS PRO

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

E6.3 bits - Phillips / recess

1/4" hexagon drive to DIN 3126, form E6.3 for direct machine connection
 Crosshead bits are Phillips-Recessed type PH/DIN 5260.
 1/4" drive, E6.3 DIN 3126



General ordering data

Type	BIT E6,3 PH2X70	Version
Order No.	9024090000	Screwdriver insert, Blade length: 70 mm, Blade size, crosshead: 2
GTIN (EAN)	4008190870720	
Qty.	5 pc(s).	
Type	BIT E6,3 PH1X70	Version
Order No.	9024080000	Screwdriver insert, Blade length: 70 mm, Blade size, crosshead: 1
GTIN (EAN)	4008190870744	
Qty.	5 pc(s).	

DMS PRO



Weidmüller torque screwdrivers have an ergonomic design and are therefore ideal for use with one hand. They can be used without causing fatigue in all installation positions. Apart from that, they incorporate an automatic torque limiter and have a good reproducibility accuracy.

General ordering data

Type	LG DMS PRO/ DMS 3	Version
Order No.	9007460000	Tools, 90 % bei 3x 500 V AC / > 91 % bei 3 x 400 V AC
GTIN (EAN)	4008190404970	
Qty.	1 pc(s).	
Type	AKKU DMS PRO	Version
Order No.	1479110000	Tools, Mounting tool
GTIN (EAN)	4050118348712	
Qty.	1 pc(s).	
Type	DMS PRO SET	Version
Order No.	1479090000	Tools, Mounting tool
GTIN (EAN)	4050118286786	
Qty.	1 pc(s).	