


## CableLine CLI C 2-4 BL/WS 6 CD

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

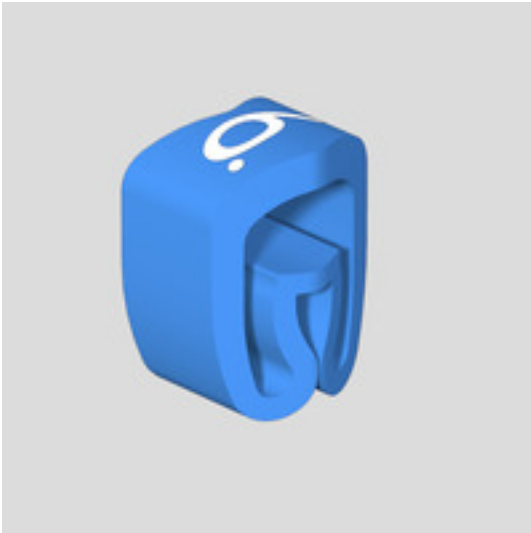

CLI C conductor markers are mounted on unconnected conductors. Four different sizes are available for labelling conductor cross-sections from 0.5 mm<sup>2</sup> to max. 70 mm<sup>2</sup>. The markers are already printed and ready for use. Individual labelling is possible by combining the individual markers.

- Closed markers, reliable and for mounting on unconnected cables
- A special flexible bellows profile ensures a wide application range
- Fast and easy to fit – with minimal effort
- Corresponding accessories make labelling easy
- Permanent, high-quality labelling
- High contrast for optimum legibility

### General ordering data

|            |   |
|------------|---|
| Type       | CLI C 2-4 BL/WS 6 CD  |
| Order No.  | <a href="#">1568261521</a>  |
| Version    | CableLine, Conductor and cable markers, 4 - 10 mm, 4 x 7 mm, blue |
| GTIN (EAN) | 4008 1909 16244   |
| Qty.       | 250 pc(s).  |

**CableLine**  
**CLI C 2-4 BL/WS 6 CD**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data****Dimensions and weights**

|            |       |                 |            |
|------------|-------|-----------------|------------|
| Width      | 7 mm  | Width (inches)  | 0.276 inch |
| Height     | 4 mm  | Height (inches) | 0.157 inch |
| Depth      | 8 mm  | Depth (inches)  | 0.315 inch |
| Net weight | 0.2 g |                 |            |

**General data**

|                             |                            |  |                    |
|-----------------------------|----------------------------|--|--------------------|
| Colour                      | blue                       | Colour of printing                           | white              |
| Halogen                     | Yes                        | Insulation cross-section, max.               | 10 mm              |
| Material                    | PVC, soft, without Cadmium | Material colour according to resistance code | 6                  |
| Operating temperature range | -30...80 °C                | Orientation of print                         | horizontal         |
| Printed characters          | Numbers                    | Printing                                     | 6                  |
| Printing method             | hot-embossing              | Recommended industries                       | Process, Machinery |
| Type of printing            | Standard                   | UL 94 flammability rating                    | V-0                |
| Version                     | CD                         | Width  | 7 mm               |

**Conductor and cable markers**

|                               |                     |                               |                    |
|-------------------------------|---------------------|-------------------------------|--------------------|
| Conductor O.D.                | 4 - 10 mm           | Conductor O.D., max.          | 10 mm              |
| Conductor O.D., min.          | 4 mm                | Conductor cross-section, max. | 16 mm <sup>2</sup> |
| Conductor cross-section, min. | 2.5 mm <sup>2</sup> | Halogen                       | Yes                |

**Classifications**

|             |             |            |             |
|-------------|-------------|------------|-------------|
| ETIM 6.0    | EC001530    | ETIM 7.0   | EC001530    |
| eClass 9.0  | 27-40-04-01 | eClass 9.1 | 27-40-04-01 |
| eClass 10.0 | 27-40-04-01 | UNSPSC     | 44-12-17-08 |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                             |  |
|-----------------------------|--|
| Engineering Data            | <a href="#">EPLAN, WSCAD</a>   |
| Product Change Notification | <a href="#">PCN CableLine_DE</a><br><a href="#">PCN CableLine_EN</a> |