

**VPK EX (Ex blanking plug in plastic)
VP 21-EXE SW**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



For sealing surplus threaded holes to maintain the IP class of protection

General ordering data

Type	VP 21-EXE SW
Order No.	1569410000
Version	VPK EX (Ex blanking plug in plastic), Blanking plug, PG 21, 12.5 mm, IP66, IP68, Polyamide
GTIN (EAN)	4008 190188849
Qty.	20 pc(s).

Creation date May 3, 2020 11:31:52 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Data sheet

**VPK EX (Ex blanking plug in plastic)
VP 21-EXE SW**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Length	18 mm	Length (inches)	0.709 inch
Net weight	7.2 g		

General information

Material	Polyamide	Cable glands	PG
External thread	PG 21	Length of thread	12.5 mm
AF size 1	32 mm	Protection degree	IP54, IP66
Protection degree with GWDR	IP66, IP68	Operating temperature range, min.	-20 °C
Operating temperature range, max.	80 °C	UL 94 flammability rating	V-2
Halogen	No	Note: protection class	IP54 in accordance with EN 60529 standard, minimal without flat gasket; IP66 in accordance with EN 60529, minimal without flat gasket; IP68 in accordance with EN 60529 with flat gasket; Except for 2D application, as specified in the Ex-Certificate, a flat gasket is required for IP66.

Classifications

ETIM 6.0	EC000451	ETIM 7.0	EC000451
eClass 9.0	27-14-44-25	eClass 9.1	27-14-44-35
eClass 10.0	27-14-44-25	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS Conform

Downloads


Engineering Data [EPLAN, WSCAD](#)

Data sheet

**VPK EX (Ex blanking plug in plastic)
VP 21-EXE SW**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

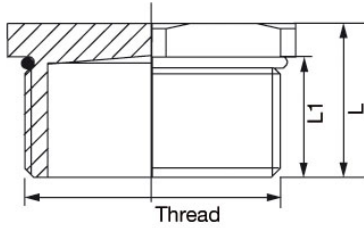

**VPK EX (Ex blanking plug in plastic)
VP 21-EXE SW**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

GWDR - neoprene flat gasket

The range of cable glands is rounded off by a large number of accessories.



General ordering data

Type	GWDR PG2 1-NP	Version
Order No.	1719590000	GWDR NP (flat gasket - neoprene), Sealing ring, PG 21, Neoprene
GTIN (EAN)	4008190352851	
Qty.	100 pc(s).	

Brass nuts, standard, nickel-plated



Weidmüller has a variety of different cable and wire entry systems in the Portfolio: with different designs of plastic, brass and stainless steel cable glands in the IP66, 67, 68 or IP69k protection classes. As a complete alternative to cable glands, pre-assembled cables with modular multi-wire or multi-cable entry systems can be simply and quickly inserted into electrical equipment. Last but not least, Weidmüller offers EX-certified cable glands and cable/wire entry systems.

- Cable glands made from plastic and brass
- EMC screwed joints
- for areas at risk of explosion
- VDE, CSA and UL approvals

General ordering data

Type	SKMU PG2 1-MS	Version
Order No.	1719200000	SKMU MS (brass locknut), Locknut, PG 21, 3.5 mm, Brass, nickel-plated
GTIN (EAN)	4008190352424	
Qty.	100 pc(s).	