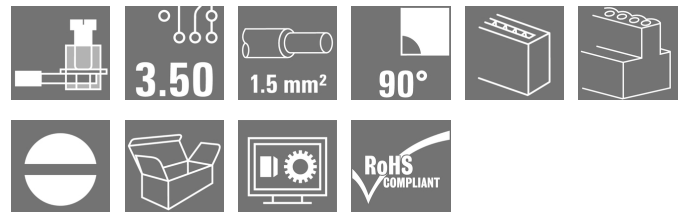


OMNIMATE Signal - series BL/SL 3.50 BL 3.50/04/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image



Similar to illustration

Female connectors with clamping yoke screw system for connecting conductors at 3.50 mm pitch. They provide space for labelling and can be coded.

General ordering data

| | |
|--------------|---|
| Type | BL 3.50/04/90 SN OR BX |
| Order No. | 1638570000 |
| Version | PCB plug-in connector, female plug, 3.50 mm, Number of poles: 4, 90°, Clamping yoke connection, Clamping range, max. : 1.5 mm², Box |
| GTIN (EAN) | 4008190276119 |
| Qty. | 132 pc(s). |
| Product data | IEC: 320 V / 12 A / 0.2 - 1.5 mm² UL: 300 V / 8 A / AWG 28 - AWG 14 |
| Packaging | Box |

Creation date May 3, 2020 6:03:18 PM CEST

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|------------|----------|-----------------|------------|
| Width | 14 mm | Width (inches) | 0.551 inch |
| Height | 12 mm | Height (inches) | 0.472 inch |
| Depth | 22.45 mm | Depth (inches) | 0.884 inch |
| Net weight | 4.08 g | | |

System Parameters

| Product family | OMNIMATE Signal - series BL/SL 3.50 | Type of connection | Field connection |
|--|-------------------------------------|--|---------------------|
| Wire connection method | Clamping yoke connection | Pitch in mm (P) | 3.5 mm |
| Pitch in inches (P) | 0.138 inch | Conductor outlet direction | 90° |
| Number of poles | 4 | L1 in mm | 10.5 mm |
| L1 in inches | 0.413 inch | Number of rows | 1 |
| Pin series quantity | 1 | Rated cross-section | 1.5 mm ² |
| Touch-safe protection acc. to DIN VDE 57 106 | Safe from finger touch | Touch-safe protection acc. to DIN VDE 0470 | IP 20 |
| Volume resistance | ≤ 5mΩ | Can be coded | Yes |
| Stripping length | 6 mm | Tightening torque, min. | 0.2 Nm |
| Tightening torque, max. | 0.25 Nm | Clamping screw | M 2 |
| Screwdriver blade | 0.4 x 2.5 | Screwdriver blade standard | DIN 5264 |
| Plugging cycles | 25 | Plugging force/pole, max. | 7 N |
| Pulling force/pole, max. | 5 N | | |

Material data

| | | | |
|---------------------------------------|--------------------------|---------------------------------------|---------------------|
| Insulating material | PBT | Colour | orange |
| Colour chart (similar) | RAL 2000 | Insulating material group | IIIa |
| Comparative Tracking Index (CTI) | ≥ 200 | Insulation strength | ≥ 10 ⁸ Ω |
| UL 94 flammability rating | V-0 | GWFI | 960 °C |
| Contact material | Copper alloy | Contact surface | tinned |
| Layer structure of plug contact | 4-8 μm Sn hot-dip tinned | Storage temperature, min. | -25 °C |
| Storage temperature, max. | 50 °C | Max. relative humidity during storage | 70 % |
| Operating temperature, min. | -50 °C | Operating temperature, max. | 100 °C |
| Temperature range, installation, min. | -30 °C | Temperature range, installation, max. | 100 °C |

Conductors suitable for connection

| | |
|---|----------------------|
| Clamping range, min. | 0.08 mm ² |
| Clamping range, max. | 1.5 mm ² |
| Wire connection cross section AWG, min. | AWG 28 |
| Wire connection cross section AWG, max. | AWG 14 |
| Solid, min. H05(07) V-U | 0.2 mm ² |
| Solid, max. H05(07) V-U | 1.5 mm ² |
| Flexible, min. H05(07) V-K | 0.2 mm ² |
| Flexible, max. H05(07) V-K | 1.5 mm ² |
| w. plastic collar ferrule, DIN 46228 pt 4, 0.2 mm ² min. | |
| w. plastic collar ferrule, DIN 46228 pt 4, 1.5 mm ² max. | |
| w. wire end ferrule, DIN 46228 pt 1, 0.2 mm ² min. | |
| w. wire end ferrule, DIN 46228 pt 1, 1.5 mm ² max. | |

Creation date May 3, 2020 6:03:18 PM CEST

OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Plug gauge in accordance with EN 60999 a x b; ø 2.4 mm x 1.5 mm

| Clampable conductor | Cross-section for conductor connection | Type | fine-wired |
|--|--|------------------------------|------------------------------|
| | | nominal | 0.5 mm ² |
| wire end ferrule | Stripping length | nominal | 8 mm |
| | | Recommended wire-end ferrule | H0.5/12 OR |
| | | nominal | 6 mm |
| | | Recommended wire-end ferrule | H0.5/6 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 0.75 mm ² | |
| wire end ferrule | Stripping length | nominal | 8 mm |
| | | Recommended wire-end ferrule | H0.75/12 W |
| | | nominal | 6 mm |
| | | Recommended wire-end ferrule | H0.75/6 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 1 mm ² | |
| wire end ferrule | Stripping length | nominal | 8 mm |
| | | Recommended wire-end ferrule | H1.0/12 GE |
| | | nominal | 6 mm |
| | | Recommended wire-end ferrule | H1.0/6 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 0.25 mm ² | |
| wire end ferrule | Stripping length | nominal | 8 mm |
| | | Recommended wire-end ferrule | H0.25/10 HBL |
| | | nominal | 5 mm |
| | | Recommended wire-end ferrule | H0.25/5 |
| Cross-section for conductor connection | Type | fine-wired | |
| | nominal | 0.34 mm ² | |
| wire end ferrule | Stripping length | nominal | 8 mm |
| | Recommended wire-end ferrule | H0.34/10 TK | |

Reference text The outside diameter of the plastic collar should not be larger than the pitch (P). Length of ferrules is to be chosen depending on the product and the rated voltage.

Max. clamping range 1.5 mm²

Rated data acc. to IEC

| | | | |
|---|------------------------|---|-------------------|
| tested acc. to standard | IEC 60664-1, IEC 61984 | Rated current, min. number of poles (Tu=20°C) | 12 A |
| Rated current, max. number of poles (Tu=20°C) | 10 A | Rated current, min. number of poles (Tu=40°C) | 10 A |
| Rated current, max. number of poles (Tu=40°C) | 8 A | Rated voltage for surge voltage class / pollution degree II/2 | 320 V |
| Rated voltage for surge voltage class / pollution degree III/2 | 160 V | Rated voltage for surge voltage class / pollution degree III/3 | 160 V |
| Rated impulse voltage for surge voltage class/ pollution degree II/2 | 2.5 kV | Rated impulse voltage for surge voltage class/ pollution degree III/2 | 2.5 kV |
| Rated impulse voltage for surge voltage class/ contamination degree III/3 | 2.5 kV | Short-time withstand current resistance | 3 x 1s with 100 A |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Rated data acc. to CSA

Institute (CSA)



Certificate No. (CSA)

154685-1318353

| | |
|-----------------------------------|--|
| Rated voltage (Use group B / CSA) | 300 V |
| Rated current (Use group B / CSA) | 10 A |
| Wire cross-section, AWG, min. | AWG 28 |
| Reference to approval values | Specifications are maximum values, details - see approval certificate. |

| | |
|-----------------------------------|--------|
| Rated voltage (Use group D / CSA) | 300 V |
| Rated current (Use group D / CSA) | 10 A |
| Wire cross-section, AWG, max. | AWG 14 |

Rated data acc. to UL 1059

Institute (UR)



Certificate No. (UR)

E60693

| | |
|---------------------------------------|--|
| Rated voltage (Use group B / UL 1059) | 300 V |
| Rated current (Use group B / UL 1059) | 8 A |
| Wire cross-section, AWG, min. | AWG 28 |
| Reference to approval values | Specifications are maximum values, details - see approval certificate. |

| | |
|---------------------------------------|--------|
| Rated voltage (Use group D / UL 1059) | 300 V |
| Rated current (Use group D / UL 1059) | 8 A |
| Wire cross-section, AWG, max. | AWG 14 |

Packing

| | | | |
|-----------|--------|------------|--------|
| Packaging | Box | VPE length | 30 mm |
| VPE width | 135 mm | VPE height | 350 mm |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC002638 | ETIM 7.0 | EC002638 |
| eClass 9.0 | 27-44-03-09 | eClass 9.1 | 27-44-03-09 |
| eClass 10.0 | 27-44-03-09 | UNSPSC | 30-21-18-10 |

Data sheet

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Notes

| | |
|----------------|---|
| Notes | <ul style="list-style-type: none"> • Additional colours on request • Gold-plated contact surfaces on request • Rated current related to rated cross-section & min. No. of poles. • Max. outer diameter of the conductor: 2.9 mm • Wire end ferrule without plastic collar to DIN 46228/1 • Wire end ferrule with plastic collar to DIN 46228/4 • P on drawing = pitch • Rated data refer only to the component itself. Clearance and creepage distances to other components are to be designed in accordance with the relevant application standards. |
| IPC conformity | Conformity: The products are developed, manufactured and delivered according international recognized standards and norms and comply with the assured properties in the data sheet resp. fulfill decorative properties in accordance with IPC-A-610 "Class 2". Further claims on the products can be evaluated on request. |

Approvals

Approvals



ROHS

Conform

Downloads

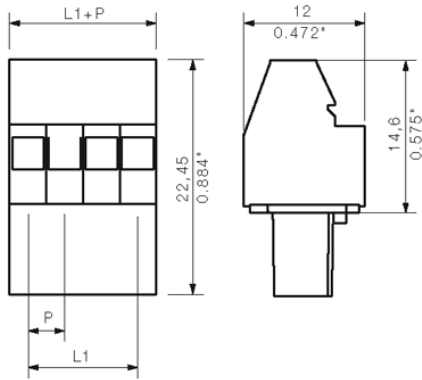
| | |
|---|--|
| Approval/Certificate/Document of Conformity | Declaration of the Manufacturer |
| Brochure/Catalogue | FL DRIVES EN MB DEVICE MANUF. EN FL DRIVES DE CAT 2 PORTFOLIOGUIDE EN FL BUILDING SAFETY EN FL APPL LED LIGHTING EN FLIndustr.CONTROLS EN FL MACHINE SAFETY EN FL HEATING ELECTR EN FL APPL INVERTER EN FL_BASE_STATION_EN FL ELEVATOR EN FL POWER SUPPLY EN FL 72H SAMPLE SER EN PO OMNIMATE EN |
| Engineering Data | EPLAN.WSCAD |
| Engineering Data | STEP |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

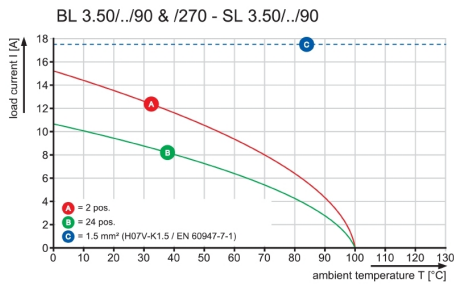
Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

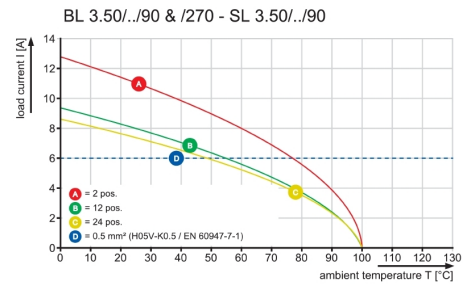
Dimensional drawing



Graph



Graph



**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com


Mating connector (conditionally pluggable)
SL-SMT 3.50/90F Tape


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90F 1.5S ... | Version | Product data | Packaging |
|------------|-----------------------------|---|---------------------------------------|-----------|
| Order No. | 1762024001 | PCB plug-in connector, male header, Flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Tape | IEC: 320 V / 15 A UL: 300 V / 10 A | Tape |
| GTIN (EAN) | 4032248136209 | | | |
| Qty. | 385 pc(s). | | | |

SLD 3.50/90F



Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data

| Type | SLD 3.50/08/90F 3.2SN O ... | Version | Product data | Packaging |
|------------|-----------------------------|---|--|-----------|
| Order No. | 1633830000 | PCB plug-in connector, male header, Flange, THT solder connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): 3.2 mm, tinned, orange, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190258283 | | | |
| Qty. | 50 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL 3.50/180F


Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

| Type | SL 3.50/04/180F 3.2SN O ... | Version | Product data | Packaging |
|------------|-----------------------------|--|-------------------|-----------|
| Order No. | 1607520000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190039097 | 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, orange, Box | | |
| Type | SL 3.50/04/180F 3.2SN D ... | Version | Product data | Packaging |
| Order No. | 1607650000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190124373 | 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, Signal green, Box | | |
| Type | SL 3.50/04/180F 4.5 SN ... | Version | Product data | Packaging |
| Order No. | 1616160000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190068301 | 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 4.5 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, black, Box | | |
| Type | SL 3.50/04/180F 4.5 SN ... | Version | Product data | Packaging |
| Order No. | 1618710000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190127282 | 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 4.5 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, orange, Box | | |
| Type | SL 3.50/04/180F 3.2SN G ... | Version | Product data | Packaging |
| Order No. | 1622280000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190189907 | 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, Pebble grey, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 3.5/90F Box


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90F 3.2S ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1842100000 | PCB plug-in connector, male header, Flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 3.2 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248353453 | | | |
| Qty. | 84 pc(s). | | | |
| Type | SL-SMT 3.50/04/90F 1.5S ... | Version | Product data | Packaging |
| Order No. | 1762022001 | PCB plug-in connector, male header, Flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248132430 | | | |
| Qty. | 84 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 3.5/90LF Tape


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90LF 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1805330000 | PCB plug-in connector, male header, Solder flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Tape | IEC: 320 V / 15 A UL: 300 V / 10 A | Tape |
| GTIN (EAN) | 4032248269587 | | | |
| Qty. | 385 pc(s). | | | |

SL 3.50/135F


Pin headers for wave soldering in 3.50 mm pitch


- **Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB**
- **Housing variant: screw flange (F)**
- **Packed in a cardboard box (BX)**
- **Pin header can be coded**

General ordering data

| Type | SL 3.50/04/135F 3.2SN O ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1643350000 | PCB plug-in connector, male header, Flange, THT solder connection, 3.50 mm, Number of poles: 4, 135°, Solder pin length (l): 3.2 mm, tinned, orange, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4008190282110 | | | |
| Qty. | 84 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SLD 3.50V/180F


Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

| Type | SLD 3.50 V/08/180F 3.2 ... | Version | Product data | Packaging |
|------------|----------------------------|--|---------------------|-----------|
| Order No. | 1641250000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: 200 V / 10.5 A | Box |
| GTIN (EAN) | 4008190279653 | 3.50 mm, Number of poles: 8, 180°, Solder pin length (l): 3.2 mm, | UL: 300 V / 8 A | |
| Qty. | 50 pc(s). | tinned, orange, Box | | |

SL-SMT 3.5/90LF Box


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90LF 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|--|-------------------|-----------|
| Order No. | 1804960000 | PCB plug-in connector, male header, Solder flange, THT/THR solder | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248268863 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 84 pc(s). | 1.5 mm, tinned, black, Box | | |
| Type | SL-SMT 3.50/04/90LF 3.2 ... | Version | Product data | Packaging |
| Order No. | 1841880000 | PCB plug-in connector, male header, Solder flange, THT/THR solder | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248353231 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 84 pc(s). | 3.2 mm, tinned, black, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 3.5/180F Box


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/180F 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|---|---------------------------------------|-----------|
| Order No. | 1760982001 | PCB plug-in connector, male header, Flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 1.5 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248131556 | | | |
| Qty. | 84 pc(s). | | | |
| Type | SL-SMT 3.50/04/180F 3.2 ... | Version | Product data | Packaging |
| Order No. | 1842790000 | PCB plug-in connector, male header, Flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248354153 | | | |
| Qty. | 84 pc(s). | | | |

SLD 3.50V/90F


Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

| Type | SLD 3.50 V/08/90F 3.2 S ... | Version | Product data | Packaging |
|------------|-----------------------------|---|--|-----------|
| Order No. | 1642380000 | PCB plug-in connector, male header, Flange, THT solder connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): 3.2 mm, tinned, orange, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190280901 | | | |
| Qty. | 50 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)
SL-SMT 3.5/180LF Tape


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/180LF 1. ... | Version | Product data | Packaging |
|------------|-----------------------------|---|---------------------------------------|-----------|
| Order No. | 1805240000 | PCB plug-in connector, male header, Solder flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 1.5 mm, tinned, black, Tape | IEC: 320 V / 15 A UL: 300 V / 10 A | Tape |
| GTIN (EAN) | 4032248269518 | | | |
| Qty. | 265 pc(s). | | | |

SL-SMT 3.5/180G Box


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data


| Type | SL-SMT 3.50/04/180G 3.2 ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1842340000 | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248353682 | | | |
| Qty. | 100 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

| Type | SL-SMT 3.50/04/180G 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1753002001 | PCB plug-in connector, male header, closed side, THT/THR solder | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248130894 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 1.5 mm, tinned, black, Box | | |

SL 3.50/90F


Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

| Type | SL 3.50/04/90F 4.5 SN B ... | Version | Product data | Packaging |
|------------|-----------------------------|--|------------------|-----------|
| Order No. | 1615550000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190057220 | 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 4.5 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, black, Box | | |
| Type | SL 3.50/04/90F 3.2SN OR ... | Version | Product data | Packaging |
| Order No. | 1607060000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190131661 | 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, orange, Box | | |
| Type | SL 3.50/04/90F 3.2SN GY ... | Version | Product data | Packaging |
| Order No. | 1619870000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190148898 | 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, Pebble grey, Box | | |
| Type | SL 3.50/04/90F 3.2SN DK ... | Version | Product data | Packaging |
| Order No. | 1607190000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190068455 | 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 3.2 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, Signal green, Box | | |
| Type | SL 3.50/04/90F 4.5SN OR ... | Version | Product data | Packaging |
| Order No. | 1618080000 | PCB plug-in connector, male header, Flange, THT solder connection, | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190116200 | 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 4.5 mm, | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | tinned, orange, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (conditionally pluggable)

SL-SMT 3.5/180LF Box



High-temperature-resistant male header, 3.50 mm pitch.


- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/180LF 1. ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1804720000 | PCB plug-in connector, male header, Solder flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 1.5 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248268702 | | | |
| Qty. | 84 pc(s). | | | |
| Type | SL-SMT 3.50/04/180LF 3. ... | Version | Product data | Packaging |
| Order No. | 1842560000 | PCB plug-in connector, male header, Solder flange, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 3.2 mm, tinned, black, Box | IEC: 320 V / 15 A UL: 300 V / 10 A | Box |
| GTIN (EAN) | 4032248353927 | | | |
| Qty. | 84 pc(s). | | | |

OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com


Mating connector (fully pluggable)**SL 3.50/180G**

Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

| Type | SL 3.50/04/180G 4.5SN B ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1616030000 | PCB plug-in connector, male header, closed side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190065492 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, black, Box | | |
| Type | SL 3.50/04/180G 3.2SN O ... | Version | Product data | Packaging |
| Order No. | 1604490000 | PCB plug-in connector, male header, closed side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190115852 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, orange, Box | | |
| Type | SL 3.50/04/180G 3.2SN D ... | Version | Product data | Packaging |
| Order No. | 1607370000 | PCB plug-in connector, male header, closed side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190151362 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, Signal green, Box | | |
| Type | SL 3.50/04/180G 4.5SN O ... | Version | Product data | Packaging |
| Order No. | 1604640000 | PCB plug-in connector, male header, closed side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190120467 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, orange, Box | | |

SL 3.50/90G

Pin headers for wave soldering in 3.50 mm pitch

- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data


| Type | SL 3.50/04/90G 3.2SN GY ... | Version | Product data | Packaging |
|------------|-----------------------------|--|------------------|-----------|
| Order No. | 1619480000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190140649 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, Pebble grey, Box | | |
| Type | SL 3.50/04/90G 3.2SN OR ... | Version | Product data | Packaging |
| Order No. | 1605090000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190054304 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, orange, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

| Type | SL 3.50/04/90G 4.5SN OR ... | Version | Product data | Packaging |
|------------|-----------------------------|--|------------------|-----------|
| Order No. | 1605240000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190028299 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, orange, Box | | |
| Type | SL 3.50/04/90G 3.2SN DK ... | Version | Product data | Packaging |
| Order No. | 1606940000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190001292 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, Signal green, Box | | |
| Type | SL 3.50/04/90G4.5SN BK ... | Version | Product data | Packaging |
| Order No. | 1615430000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190054496 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, black, Box | | |
| Type | SL 3.50/04/90G 3.2SN BK ... | Version | Product data | Packaging |
| Order No. | 1719990000 | PCB plug-in connector, male header, closed side, THT solder | IEC: / 17 A | Box |
| GTIN (EAN) | 4008190354275 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 120 pc(s). | 3.2 mm, tinned, black, Box | | |

SLD 3.50/90


Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data

| Type | SLD 3.50/08/90 3.2SN OR ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------|-----------|
| Order No. | 1633370000 | PCB plug-in connector, male header, open side, THT solder | IEC: 200 V / 10.5 A | Box |
| GTIN (EAN) | 4008190257828 | connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): | UL: 300 V / 8 A | |
| Qty. | 50 pc(s). | 3.2 mm, tinned, orange, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmuller.com

Mating connector (fully pluggable)
SL-SMT 3.5/90G Tray


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90G 1.5S ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1761563001 | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Tray | IEC: 320 V / 15 A UL: 300 V / 10 A | Tray |
| GTIN (EAN) | 4032248133833 | | | |
| Qty. | 96 pc(s). | | | |

SL-SMT 3.5/90G Tape


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/90G 1.5S ... | Version | Product data | Packaging |
|------------|-----------------------------|--|---------------------------------------|-----------|
| Order No. | 1761564001 | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Tape | IEC: 320 V / 15 A UL: 300 V / 10 A | Tape |
| GTIN (EAN) | 4032248135905 | | | |
| Qty. | 385 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

| Type | SL-SMT 3.50/04/90G 1.5S ... | Version | Product data | Packaging |
|------------|-----------------------------|--|-------------------|-----------|
| Order No. | 1761564002 | PCB plug-in connector, male header, closed side, THT/THR solder | IEC: 320 V / 15 A | Tape |
| GTIN (EAN) | 4032248193349 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 385 pc(s). | 1.5 mm, tinned, black, Tape | | |

SL-THR 3.5/135F


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/135F 3.2 ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1003530000 | PCB plug-in connector, male header, Flange, THT/THR solder | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248700165 | connection, 3.50 mm, Number of poles: 4, 135°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 84 pc(s). | 3.2 mm, tinned, black, Box | | |

SLD 3.50V/90G


Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

| Type | SLD 3.50V/08/90G 3.2SN ... | Version | Product data | Packaging |
|------------|----------------------------|--|---------------------|-----------|
| Order No. | 1642250000 | PCB plug-in connector, male header, closed side, THT solder | IEC: 200 V / 10.5 A | Box |
| GTIN (EAN) | 4008190280772 | connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): | UL: 300 V / 8 A | |
| Qty. | 50 pc(s). | 3.2 mm, tinned, orange, Box | | |

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/04/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

SL-SMT 3.5/180G Tape




High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/180G 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1753004002 | PCB plug-in connector, male header, closed side, THT/THR solder | IEC: 320 V / 15 A | Tape |
| GTIN (EAN) | 4032248193219 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 265 pc(s). | 1.5 mm, tinned, black, Tape | | |

SL 3.50/180



Pin headers for wave soldering in 3.50 mm pitch

- **Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB**
- **Housing variant: screw flange (F)**
- **Packed in a cardboard box (BX)**
- **Pin header can be coded**

General ordering data

| Type | SL 3.50/04/180 3.2SN OR ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1604790000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190127855 | connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, orange, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmuller.com

Mating connector (fully pluggable)
SL-SMT 3.5/180G Tray


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data

| Type | SL-SMT 3.50/04/180G 1.5 ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1753003001 | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 4, 180°, Solder pin length (l): 1.5 mm, tinned, black, Tray | IEC: 320 V / 15 A | Tray |
| GTIN (EAN) | 4032248132737 | | UL: 300 V / 10 A | |
| Qty. | 96 pc(s). | | | |

SL-SMT 3.5/90G Box


High-temperature-resistant male header, 3.50 mm pitch.

- **Plugging direction parallel (90°), straight 180° or angled (135°) to PCB**
- **Housing variants: closed side (G), screw flange (F), solder flange (LF) or snap-on solder flange (RF)**
- **Optimised for the SMT process**
- **Pin length 3.2 mm universal for all soldering methods**
- **Pin length 1.5 mm optimised for reflow soldering methods**
- **Packed either in a box (BX) or tape-on-reel (RL)**
- **Male header can be coded**

General ordering data


| Type | SL-SMT 3.50/04/90G 1.5S ... | Version | Product data | Packaging |
|------------|-----------------------------|---|-------------------|-----------|
| Order No. | 1761562001 | PCB plug-in connector, male header, closed side, THT/THR solder connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): 1.5 mm, tinned, black, Box | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248132058 | | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

| Type | SL-SMT 3.50/04/90G 3.2S ... | Version | Product data | Packaging |
|------------|-----------------------------|--|-------------------|-----------|
| Order No. | 1841650000 | PCB plug-in connector, male header, closed side, THT/THR solder | IEC: 320 V / 15 A | Box |
| GTIN (EAN) | 4032248352807 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, black, Box | | |

SL 3.50/90


Pin headers for wave soldering in 3.50 mm pitch


- Plugging direction is parallel (90°), straight 180° or angled (135°) to the PCB
- Housing variant: screw flange (F)
- Packed in a cardboard box (BX)
- Pin header can be coded

General ordering data

| Type | SL 3.50/04/90 4.5SN OR ... | Version | Product data | Packaging |
|------------|-----------------------------|--|-------------------|-----------|
| Order No. | 1605390000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190034658 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, orange, Box | | |
| Type | SL 3.50/04/90 4.5SN BK ... | Version | Product data | Packaging |
| Order No. | 1615310000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190052539 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 4.5 mm, tinned, black, Box | | |
| Type | SL 3.50/04/90 3.2SN GY ... | Version | Product data | Packaging |
| Order No. | 1619090000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190133788 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, Pebble grey, Box | | |
| Type | SL 3.50/04/90 3.2SN OR ... | Version | Product data | Packaging |
| Order No. | 1597230000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190029838 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, orange, Box | | |
| Type | SL 3.50/04/90 3.2SN DKG ... | Version | Product data | Packaging |
| Order No. | 1606820000 | PCB plug-in connector, male header, open side, THT solder | IEC: 320 V / 17 A | Box |
| GTIN (EAN) | 4008190108311 | connection, 3.50 mm, Number of poles: 4, 90°, Solder pin length (l): | UL: 300 V / 10 A | |
| Qty. | 100 pc(s). | 3.2 mm, tinned, Signal green, Box | | |

**OMNIMATE Signal - series BL/SL 3.50
BL 3.50/04/90 SN OR BX**


Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)
SLD 3.50/90G


Two-tier pin header for wave soldering in 3.50 mm pitch. The connector is available in open, closed and flange versions. The male connectors provide space for labelling and can be coded. Packed in a cardboard box.

General ordering data

| Type | SLD 3.50/08/90G 3.2SN O ... | Version | Product data | Packaging |
|------------|-----------------------------|--|--|-----------|
| Order No. | 163360000 | PCB plug-in connector, male header, closed side, THT solder connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): 3.2 mm, tinned, orange, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190258054 | | | |
| Qty. | 50 pc(s). | | | |
| Type | SLD 3.50/08/90G 4.5SN B ... | Version | Product data | Packaging |
| Order No. | 163429000 | PCB plug-in connector, male header, closed side, THT solder connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): 4.5 mm, tinned, black, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190258740 | | | |
| Qty. | 50 pc(s). | | | |
| Type | SLD 3.50/08/90G 3.2SN D ... | Version | Product data | Packaging |
| Order No. | 167489000 | PCB plug-in connector, male header, closed side, THT solder connection, 3.50 mm, Number of poles: 8, 90°, Solder pin length (l): 3.2 mm, tinned, Signal green, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190445584 | | | |
| Qty. | 50 pc(s). | | | |

SLD 3.50V/180G


Double-level, staggered pin header for wave soldering at 3.50 mm pitch. They are available in closed and flanged versions. The male connectors provide space for labelling and can be coded.

General ordering data

| Type | SLD 3.50V/08/180G 3.2SN ... | Version | Product data | Packaging |
|------------|-----------------------------|---|--|-----------|
| Order No. | 164112000 | PCB plug-in connector, male header, closed side, THT solder connection, 3.50 mm, Number of poles: 8, 180°, Solder pin length (l): 3.2 mm, tinned, orange, Box | IEC: 200 V / 10.5 A UL: 300 V / 8 A | Box |
| GTIN (EAN) | 4008190279523 | | | |
| Qty. | 50 pc(s). | | | |

OMNIMATE Signal - series BL/SL 3.50 BL 3.50/04/90 SN OR BX

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Coding elements



**Only connects what is supposed to be connected:
the right connection at the right place.**

Coding elements and locking devices clearly assign connecting elements during the manufacturing process and operation

The coding elements and locking devices are inserted prior to assembly or during the cable assembly phase. The Weidmüller alternative: configure online using the variant configurator to precode prior to delivery.

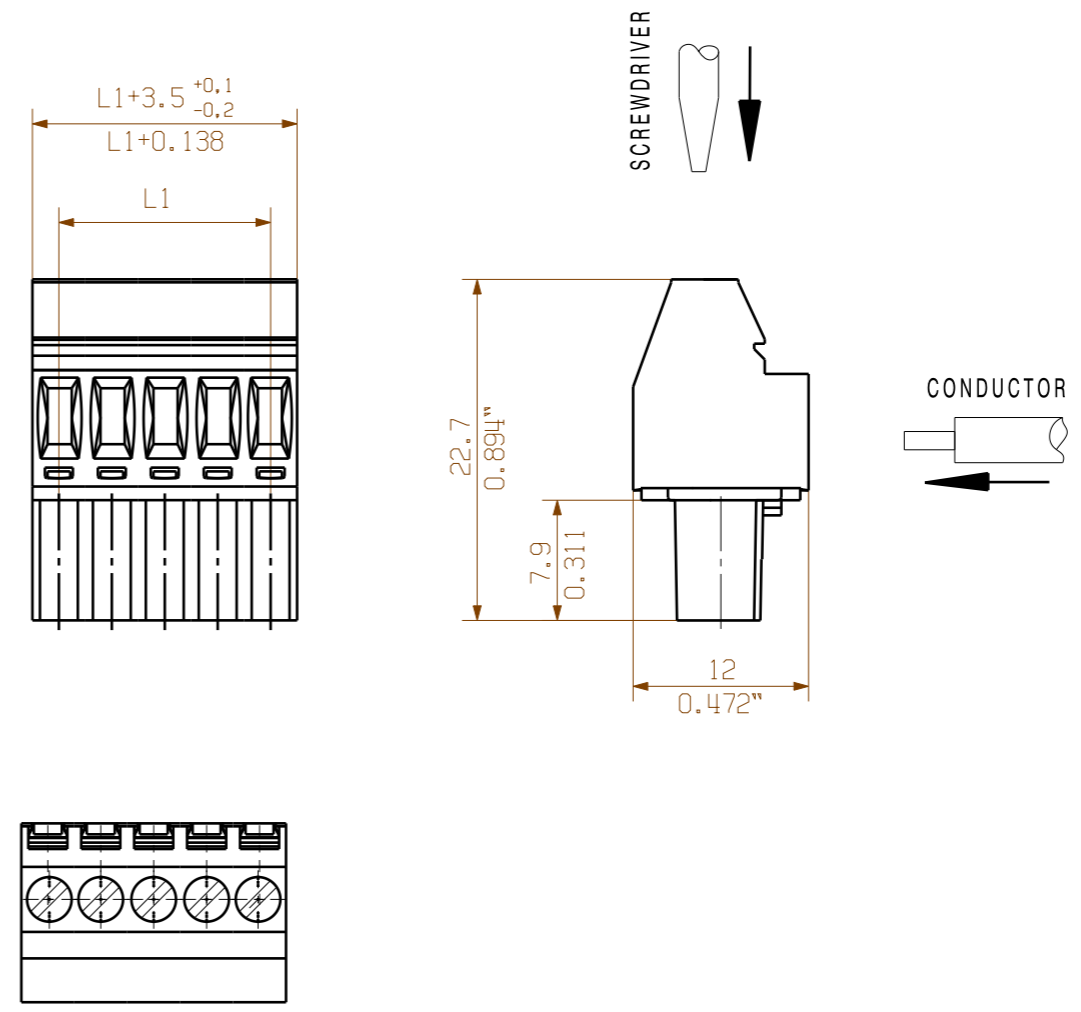
Incorrect assembly on the circuit board and incorrect plugging of connecting elements is no longer possible. The advantage: no troubleshooting during manufacture and no operational errors by the user.

General ordering data

| Type | BL SL 3.5 KO SW | Version | Product data | Packaging |
|------------|----------------------------|--|--------------|-----------|
| Order No. | 1610100000 | PCB plug-in connector, Accessories, Coding element, black, Number | | Box |
| GTIN (EAN) | 4008190187637 | of poles: 1 | | |
| Qty. | 100 pc(s). | | | |
| Type | BL SL 3.5 KO OR | Version | Product data | Packaging |
| Order No. | 1693430000 | PCB plug-in connector, Accessories, Coding element, orange, Number | | Box |
| GTIN (EAN) | 4008190867447 | of poles: 1 | | |
| Qty. | 100 pc(s). | | | |

DIE DEUTSCHE VERSION IST VERBINDLICH
THE GERMAN VERSION IS BINDING

WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATTET.
 ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTEREINTRAGUNG VORBEHALTEN.
 THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.
 OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. WEIDMUELLER EXCLUSIVELY RESERVES THE RIGHT TO FILE FOR PATENTS, UTILITY MODELS OR DESIGNS.
 © WEIDMUELLER INTERFACE GmbH & Co.KG



| | | |
|----|--------|-----------|
| 24 | 80,50 | 3,169 |
| 23 | 77,00 | 3,031 |
| 22 | 73,50 | 2,894 |
| 21 | 70,00 | 2,756 |
| 20 | 66,50 | 2,618 |
| 19 | 63,00 | 2,480 |
| 18 | 59,50 | 2,343 |
| 17 | 56,00 | 2,205 |
| 16 | 52,50 | 2,067 |
| 15 | 49,00 | 1,929 |
| 14 | 45,50 | 1,791 |
| 13 | 42,00 | 1,654 |
| 12 | 38,50 | 1,516 |
| 11 | 35,00 | 1,378 |
| 10 | 31,50 | 1,240 |
| 9 | 28,00 | 1,102 |
| 8 | 24,50 | 0,965 |
| 7 | 21,00 | 0,827 |
| 6 | 17,50 | 0,689 |
| 5 | 14,00 | 0,551 |
| 4 | 10,50 | 0,413 |
| 3 | 7,00 | 0,276 |
| 2 | 3,50 | 0,138 |
| n | L1[mm] | L1 [Inch] |

SHOWN : BL 3.50/05/90

For the mounting of PCBs, it should be noted that the rated data given in the catalogue relates only to the connection elements. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to VDE 0110. The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

| | | | | |
|--------------|---|-----------------------------------|----------------------------|---|
| | METRIC TOLERANCES: X. = ±0.3 X.X = ±0.1 X.XX = ±0.05 | | CAT.NO.: | |
| | 60340/0 15.09.11 HELIS_MA 01 | | C 21346 15 | |
| MODIFICATION | | | | DRAWING NO. OF 03 SHEETS |
| | | DATE DRAWN 24.07.2003 | NAME KOWOLLIK_R | BL 3.50/././90... BUCHSENSTECKER FEMALE PLUG |
| SCALE: 5/1 | | RESPONSIBLE CHECKED 15.09.2011 | LANG_T RIEPENHAUSEN_H | |
| SUPERSEDES: | | APPROVED HECKERT_M | PRODUCT FILE: BL 3.50 7369 | |