


## TM-I TM-I 20 MC NE RT

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

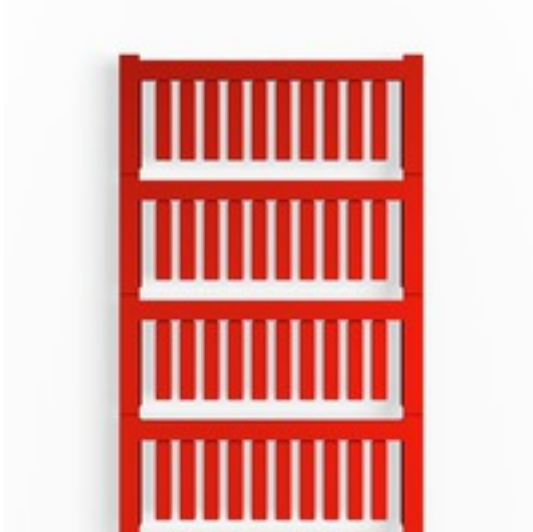

TM-I is an acknowledged and accredited marker type for traffic engineering applications. There are five different tag lengths available for individual labelling with long character strings. Easy handling of separation and installation thanks to the project marker field. Pre-attachment of sleeves and retrofitting of tags offer excellent versatility

The special contour of TM-I allows easy assembly and secures firm positioning. They are compatible with a number of commercially available sleeves. Thanks to the MultiCard format, the tags can be printed quickly and conveniently with the SMark laser printer, PrintJet ADVANCED, plotter, MC-Mobilo or the STI pen.

- Easy handling of separation and installation thanks to the project marker field.
- Acknowledged and accredited marker for traffic engineering applications
- Pre-attachment of sleeves and retrofitting of tags offer excellent versatility
- Not suited for labelling with P-Ink or STI pen in connection with CLI T sleeves

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

### General ordering data

Type	TM-I 20 MC NE RT
Order No.	<a href="#">1680411686</a>
Version	TM-I, Insert markers, 20 x 4 mm, red
GTIN (EAN)	4008190367848
Qty.	400 pc(s).
compatible printer	<a href="#">1324380000</a> <a href="#">2438520000</a> <a href="#">2438510000</a>

## Data sheet

### TM-I TM-I 20 MC NE RT

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

## Technical data

### Dimensions and weights

Width	4 mm	Width (inches)	0.157 inch
Height	20 mm	Height (inches)	0.787 inch
Depth	2 mm	Depth (inches)	0.079 inch
Net weight	0.21 g		

### General data

Colour	red	Halogen	No
Material	Polyamide 66	Material colour according to resistance code	2
Operating temperature range	-40...100 °C	Recommended industries	Transportation, Machinery
Type of printing	neutral	UL 94 flammability rating	V-2
Width	4 mm		

### Conductor and cable markers

Halogen	No
---------	----

### Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
eClass 9.0	27-40-04-01	eClass 9.1	27-40-04-01
eClass 10.0	27-40-04-01	UNSPSC	44-12-17-08

### Approvals

ROHS	Conform
------	---------

### Downloads

Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
Engineering Data	<a href="#">STEP</a>
Software	<a href="#">M-Print PRO configuration file</a>

**Data sheet**

**TM-I**  
**TM-I 20 MC NE RT**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

