

**THM
THM WO 33.5/93.1 WS**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



Similar to illustration

THM WriteOn cable markers on reels are used for labelling conductors and cables with an outside diameter of up to 36 mm. The transparent adhesive strip fixes and protects the printing on the marker surface.

- Protection of the marking against dirt and abrasion by wrapping it with the transparent adhesive strip
- Simple and quick printing with the high-quality thermal transfer printers

General ordering data

| | |
|--------------------|--|
| Type | THM WO 33.5/93.1 WS |
| Order No. | 1774400000 |
| Version | THM, Conductor and cable markers, 8 - 21.7 mm, 33.5 x 93.1 mm, white |
| GTIN (EAN) | 4032248148585 |
| Qty. | 1 pc(s). |
| compatible printer | 2430920000 2448870000 2599430000 2599440000 |

Creation date May 3, 2020 12:23:34 PM CEST

**THM
THM WO 33.5/93.1 WS**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

| | | | |
|------------|----------|-----------------|------------|
| Width | 93.1 mm | Width (inches) | 3.665 inch |
| Height | 33.5 mm | Height (inches) | 1.319 inch |
| Depth | 0.025 mm | Depth (inches) | 0.001 inch |
| Net weight | 286 g | | |

General data

| | | | |
|---------------------------|-----------------------|--|---------------|
| Adhesive | Polyacrylate adhesive | Approval acc. to UL 969 | Yes |
| Colour | white | Halogen | No |
| Material | Polyester film | Material colour according to resistance code | 9 |
| Number per roll | 500 | Operating temperature range | -40... 150 °C |
| Size of labelling field | 25 x 33.5 mm | Type of printing | neutral |
| UL 94 flammability rating | V-0 | Version | Self-adhesive |
| Width | 93.1 mm | | |

Conductor and cable markers

| | | | |
|-------------------------------|----------------------|-------------------------------|---------------------|
| Conductor O.D. | 8 - 21.7 mm | Conductor O.D., max. | 21.7 mm |
| Conductor O.D., min. | 8 mm | Conductor cross-section, max. | 400 mm ² |
| Conductor cross-section, min. | 0.75 mm ² | Halogen | No |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC001530 | ETIM 7.0 | EC001530 |
| eClass 9.0 | 27-40-04-01 | eClass 9.1 | 27-40-04-01 |
| eClass 10.0 | 27-40-04-01 | UNSPSC | 44-12-17-08 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads


| | |
|------------------|--|
| Engineering Data | EPLAN, WSCAD, Zuken E3.S |
| Engineering Data | STEP |
| Software | M-Print PRO configuration file |

Data sheet

THM
THM WO 33.5/93.1 WS

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

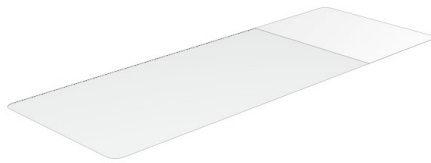

Data sheet**THM**
THM WO 33.5/93.1 WS**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com**Accessories****Ink ribbons**

Our marking systems can be used to quickly and reliably label connector markers, conductor and cable markers, device markers and labels. The M-Print® PRO software enables rapid and easy identification of your electrical equipment. You can design, label and order your marking materials professionally and quickly. Frames, barcodes, graphics or photos are easily incorporated. The versatile data conversion routines enable quick and flexible data integration. The Weidmüller PrintJet ADVANCED, MCP Plus and MCP Basic printers and the THM series printers are available for printing.

General ordering data

| | | | |
|------------|----------------------------|------------|--|
| Type | RIBBON MM 110/360 SW | Version | |
| Order No. | 2005070000 | Ink ribbon | |
| GTIN (EAN) | 4050118390049 | | |
| Qty. | 1 pc(s). | | |