

### Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com





Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

#### **General ordering data**

Туре	SAIL-M12BW-4-3.0T
Order No.	<u>1968570300</u>
Version	Sensor/actuator line, One end without connector, M12, Number of poles : 4, 3 m, Socket, angled, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4032248669813
Qty.	1 pc(s).

## Creation date May 3, 2020 5:33:53 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

# **Technical data**



## Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Dimensions and weights			
Net weight	117 g		
Temperatures			
Operating temperature, max.	80 °C	Operating temperature, min.	-25 °C
Environmental Product Com	oliance		
REACH SVHC	Lead 7439-92-1		
Technical specifications for (			
Number of poles	4	Core cross-section	0.34 mm <sup>2</sup>
Outside diameter	4.9 mm ± 0.2 mm	Cable length	3 m
Shielded	No	Insulation	PP
Colour coding	brown, white, blue, black	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-30105 °C	Temperature range, stationary	-40105 °C
Outer cladding in accordance with UL AWM style	20233 (80 °C / 300 V)	Suitable for cable carriers	Yes
Torsion resistance	360 °/m	Bending radius, min., stationary	4 x cable diameter
Bending radius, min., moving	7.5 x cable diameter	Acceleration	5 m/s <sup>2</sup>
Speed	200 m/min	Bending cycles	10 Mio
Resistant to welding beads	Yes	Configurable cable length	No
General technical data			
A.F	40		
AF size	12 mm	Version	Socket, angled
Connection thread	M12	Housing main material	PUR
Threaded ring material	Diecast zinc	Coding	A
Protection degree	IP65, IP66, IP67, IP68, when screwed in	Contact surface	Gold-plated
LED	No	Rated voltage	250 V
Rated current	4 A	Insulation strength	<u>10<sup>8</sup> Ω</u>
Temperature range of housing	-25+80 °C	Tightening torque	M12: 0.8 - 1.2 Nm
Plugging cycles	≥ 100	Pollution severity	3
jumpered	No		<u> </u>
Standards			
Connector standard	IEC 61076-2-101	Certificate no. (cULus)	E307231
Classifications			
ETIM 6.0	EC001855	ETIM 7.0	EC001855
ETIM 6.0 eClass 9.0	EC001855 27-06-03-11	ETIM 7.0 eClass 9.1	EC001855 27-06-03-11

## Creation date May 3, 2020 5:33:53 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

# **Technical data**

Approvals



## Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com


Approvals	
ROHS	LISTED Conform
Downloads	
Brochure/Catalogue	FL FIELDWIRING EN
Engineering Data	EPLAN, WSCAD
Product Change Notification	DE - Technische Änderung zu M12 Gewindering mit 6-Kant EN - Technical change to M12 nut with additional hexagonal mounting

## Drawings



## Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

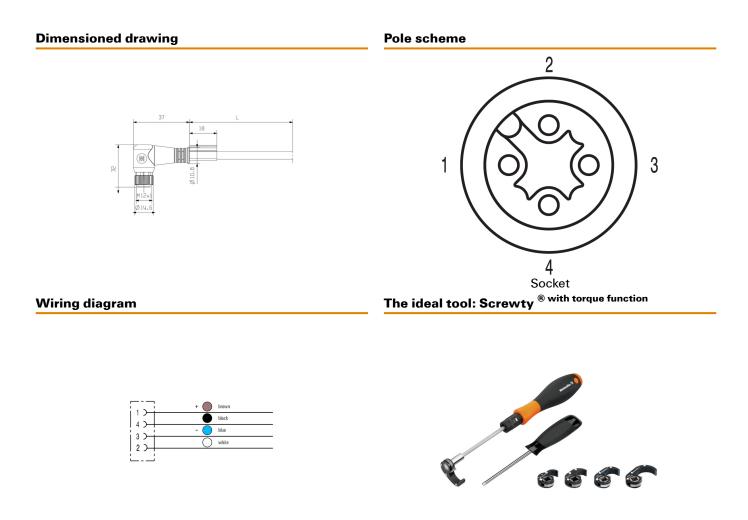

Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F

## Accessories

Tool



# Weidmüller 🟵

## Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

Tools for stripping the sheathing from uncut power lines and outlet lines, plus screwdrivers for installing Pick-to-Light components.

General ordering data		
Туре	SCREWTY-M12-DM	Version
Order No.	<u>1900001000</u>	Tools, Cable gland tool for moulded M12 lines
GTIN (EAN)	4032248436408	
Qty.	1 pc(s).	

#### Tools



- · Stripping tools with automatic self-adjustment
- For flexible and solid conductors
- Ideally suitable for mechanical and plant engineering, railway and rail traffic, wind energy, robot technology, explosion protection as well as marine, offshore and ship building sectors
- Stripping length adjustable via end stop
- Automatic opening of clamping jaws after stripping
- No fanning-out of individual conductors
- Adjustable to diverse insulation thicknesses
- Double-insulated cables in two process steps without special adjustment
- No play in self-adjusting cutting unit
- Long service life
- Optimised ergonomic design

#### **General ordering data**

Туре	STRIPPER 6-16 RED-LINE	Version
Order No.	<u>9203110000</u>	Stripping and cutting tool, 16mm <sup>2</sup>
GTIN (EAN)	4032248541423	
Qty.	1 pc(s).	



### Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

## Accessories

## Cutting tools for outside diameters up to 22 mm



Cutting tools for conductors up to 8 mm, 12 mm, 14 mm and 22 mm outside diameter. The special blade geometry allows pinch-free cutting of copper and aluminium conductors with minimum physical effort. The cutting tools also come with VDE and GS-tested protective insulation up to 1,000 V in accordance with EN/IEC 60900.

#### **General ordering data**

Туре	KT 8	Version
Order No.	9002650000	Cutting tools ,Cutting tool for one-hand operation
GTIN (EAN)	4008190020163	
Qty.	1 pc(s).	

#### Blank



TM-I is an acknowledged and accredited marker type for traffic engineering applications. There are five different tag lengths available for individual labelling with long character strings. Easy handling of separation and installation thanks to the project marker field. Preattachment of sleeves and retrofitting of tags offer excellent versatility

The special contour of TM-I allows easy assembly and secures firm positioning. They are compatible with a number of commercially available sleeves. Thanks to the MultiCard format, the tags can be printed quickly and conveniently with the SMark laser printer, PrintJet ADVANCED, plotter, MC-Mobilo or the STI pen.

- Easy handling of separation and installation thanks to the project marker field.
- Acknowledged and accredited marker for traffic engineering applications
- Pre-attachment of sleeves and retrofitting of tags offer excellent versatility
- Not suited for labelling with P-Ink or STI pen in connection with CLI T sleeves

**For custom printing:** Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

#### **General ordering data**

 Type
 TM-I 18 MC NE GE

 Order No.
 1718431687

 GTIN (EAN)
 4008190349028

 Qty.
 320 pc(s).

TM-I, Insert markers, 18 x 4 mm, yellow

#### Creation date May 3, 2020 5:33:53 AM CEST

Version

# Weidmüller 🔀

## Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26 D-32758 Detmold Germany Fon: +49 5231 14-0 Fax: +49 5231 14-292083 www.weidmueller.com

## Accessories

Туре	TM-I 18 MC NE WS	Version
Order No.	<u>1718431044</u>	TM-I, Insert markers, 18 x 4 mm, white
GTIN (EAN)	4008190349011	
Qty.	320 pc(s).	

#### Tools





#### **General ordering data**

 Type
 AM 12
 Version

 Order No.
 9030060000
 Tools, Sheathing strippers, UTP and STP data cables

 GTIN (EAN)
 4008190337827
 Tools, Sheathing strippers, UTP and STP data cables

 Qty.
 1 pc(s).
 Tools, Sheathing strippers, UTP and STP data cables

## Screwty® cable gland tool with torque function



#### The ideal tool for any application

Screwty® is the ideal, all-purpose tool for tightening all common sensor and actuator cables. Even difficult-to-reach round plugs are accessible using the Screwty®. A simple turning movement tightens and loosens the connectors without the need for excessive force. The Screwty® is a unique and global solution since it fits with most cables and plugs from other vendors (over 90 %). The Screwty® consists of a handle with a conventional 1/4" adapter. Thus it can be used for all sizes: for M12 and M8 round plug-in connectors, and for M12F and M8F customisable plugs and sockets, as well as for all M23 plugs and sockets.

## **General ordering data**

Туре	SAI-SCREWTY BOX	Version
Order No.	<u>1939180000</u>	Tools, Bolting tool
GTIN (EAN)	4032248615506	
Qty.	1 pc(s).	
Туре	SCREWTY SW12	
Order No.	<u>2598970000</u>	
GTIN (EAN)	4050118781151	
Qty.	1 pc(s).	