

**SAIL-M12WM12W-S3-3.0P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Your peripheral devices should be supplied with greater power. With our new M12 plug-in connector, more than 250 V and 2 A is possible without problems. The compact S- and T-coded M12 plug-in connectors are designed for the transmission of up to 630 V AC or 60 V DC and 12 A.

**General ordering data**

Type	SAIL-M12WM12W-S3-3.0P
Order No.	<a href="#">2050150300</a>
Version	Power cable, Connecting line, Number of poles : 3 (2 + PE), 3 m, pin, 90&deg; - socket 90&deg;., Shielded: No, LED: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4050118441291
Qty.	1 pc(s).

Creation date May 2, 2020 11:02:14 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**SAIL-M12WM12W-S3-3.0P****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 200 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

Number of poles	3 (2 + PE)	Core cross-section	1.5 mm <sup>2</sup>
Outside diameter	8.5 mm ± 0.3 mm	Cable length	3 m
Shielded	No	Insulation	PP
Colour coding	blue, brown, Green/yellow	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-40...80 °C	Temperature range, stationary	-50...80 °C
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)	Suitable for cable carriers	Yes
Bending radius, min., stationary	4 x cable diameter	Bending radius, min., moving	7.5 x cable diameter
Acceleration	5 m/s <sup>2</sup>	Speed	5 m/s
Bending cycles	10 Mio	Resistant to welding beads	No
Configurable cable length	No		

**General technical data**

Version	pin, 90°; - socket 90°	Housing main material	PUR
Coding	S	Protection degree	IP67, when screwed in
Contact surface	Gold-plated	LED	No
Rated voltage	600 V	Rated current	12 A
Insulation strength	10 <sup>8</sup> Ω	Temperature range of housing	-25...+80 °C
Plugging cycles	≥ 100	Pollution severity	3

**Standards**

Connector standard IEC 61076-2-111

**Classifications**

ETIM 6.0	EC001855	ETIM 7.0	EC001855
eClass 9.0	27-06-03-11	eClass 9.1	27-06-03-11
eClass 10.0	27-06-03-11		

**Approvals**

ROHS Conform

**Downloads**Brochure/Catalogue [FL FIELDWIRING EN](#)


**Data sheet**

**SAIL-M12WM12W-S3-3.0P**


**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**


**Dimensioned drawing**




**Dimensioned drawing**




**Pole scheme**

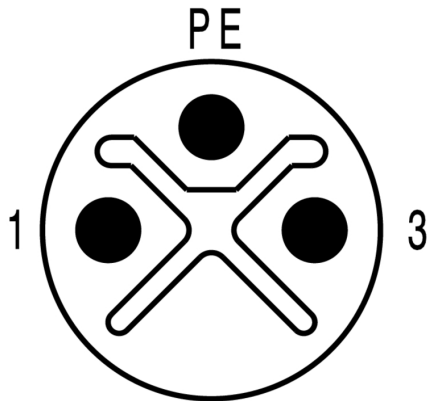

**Pole scheme**

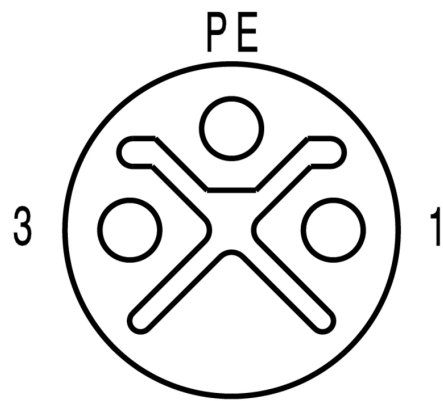

**Wiring diagram**



**The ideal tool: Screwty® with torque function**

