

BKP-16DO-SDV541-V0-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The digital output interfaces via relay are used to isolate the field sensors from the card and/or to adapt the operation of the said elements to the voltage required by the DCS. The interfaces also support additional characteristics that provide many benefits such as:

- **Redundancy:** the interfaces have 2 50-pole (AKB) connectors for redundancy purposes.
- Many of the interfaces activate a relay to indicate if one of the two possible power sources has dropped below a value of approximately 12 V
- The cards can be mounted via tension clamp or screw connection.
- The input sensors can be connected in two ways: supplied with power directly from the card or directly from the field.

General ordering data

Type	BKP-16DO-SDV541-V0-S
Order No.	2461730000
Version	2 x AKB (50P)
GTIN (EAN)	4050118476965
Qty.	1 pc(s).

BKP-16DO-SDV541-V0-S**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Length	376 mm	Length (inches)	14.803 inch
Width	168 mm	Width (inches)	6.614 inch
Height	125 mm	Height (inches)	4.921 inch
Net weight	4,126.724 g		

Temperatures

Operating temperature, max.	50 °C	Operating temperature, min.	-25 °C
Storage temperature, max.	85 °C	Storage temperature, min.	-40 °C
Operating temperature	-25...50 °C	Storage temperature	-40...85 °C

General data

Power supply fuse	2 A
-------------------	-----

Connection data

Connection to PLC	Yokogawa ProSafe	Connection to the card	SDV541
Connection on control side	2 x AKB (50P)	Number of poles (control side)	50-pole plug
Connection supply	LP 5.08mm		

Ratings data output

Relay type	SIL3
------------	------

Insulation coordinates (EN50178)

Rated input insulation voltage	50 V AC / 70 V DC	Rated output insulation voltage	< 300 V AC
Overvoltage category input/output	III	Overvoltage category input/input	III
Overvoltage category output/output	III	Pollution severity level	2
Pulse voltage test (1,2/50µs)	6 kV	Insulation test voltage	1.2 kVAC
Clearance input/output	≥ 5.5 mm	Clearance input/input	≥ 0.3 mm
Clearance output/output	≥ 5.5 mm		

Connection field

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	2.5 mm ²	Solid, min. H05(07) V-U	0.2 mm ²
Solid, max. H05(07) V-U	2.5 mm ²	Flexible, min. H05(07) V-K	0.2 mm ²
Flexible, max. H05(07) V-K	2.5 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	0.2 mm ²	Min. wire cross-section, AWG	AWG 26
Max. wire cross-section, AWG	AWG 14	Stripping length	6 mm

Supply connection

Type of connection	Screw connection	Clamping range, min.	0.13 mm ²
Clamping range, max.	6 mm ²	Solid, min. H05(07) V-U	0.5 mm ²
Solid, max. H05(07) V-U	6 mm ²	Flexible, min. H05(07) V-K	0.5 mm ²
Flexible, max. H05(07) V-K	4 mm ²	Flexible with sleeve, max.	2.5 mm ²
Flexible with sleeve, min.	2.5 mm ²	Ferrule with plastic collar, max.	0.5 mm ²
Wire cross-section, min. AWG	AWG 12	Wire cross-section, max. AWG	AWG 26
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.6 Nm
Stripping length	6 mm		

Creation date May 2, 2020 1:11:39 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

2

BKP-16DO-SDV541-V0-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Classifications**

ETIM 6.0	EC002780	ETIM 7.0	EC002780
eClass 9.0	27-14-11-52	eClass 9.1	27-24-22-16
eClass 10.0	27-14-11-52		

Approvals


Approvals



BKP-16DO-SDV541-V0-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

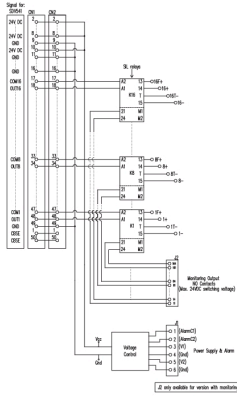

Derating curve safety output

