

## SAIL-M8GM8G-5-1.5U

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

Our developers have focused specifically on this issue and designed a host of different M8 and M12 sensor-actuator cables so you are bound to find the solution you need for your application.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

### General ordering data

Type	SAIL-M8GM8G-5-1.5U
Order No.	<a href="#">2475210150</a>
Version	Sensor/actuator line, M8 / M8, Number of poles : 5, 1.5 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4050118487015
Qty.	1 pc(s).

Creation date May 2, 2020 12:29:10 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

**SAIL-M8GM8G-5-1.5U****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

**Technical data****Dimensions and weights**

Net weight 66 g

**Environmental Product Compliance**

REACH SVHC Lead 7439-92-1

**Technical specifications for cable**

Number of poles	5	Core cross-section	0.25 mm <sup>2</sup>
Cable length	1.5 m	Shielded	No
Insulation	PP	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-25...80 °C	Temperature range, stationary	-40...80 °C
Outer cladding in accordance with UL AWM style	20549 (80 °C / 300 V)	Suitable for cable carriers	Yes
Torsion resistance	360 °/m	Bending radius, min., stationary	5 x cable diameter
Bending radius, min., moving	10 x cable diameter	Acceleration	5 m/s <sup>2</sup>
Speed	5 m/s	Bending cycles	2 Mio
Resistant to welding beads	No	Configurable cable length	No

**General technical data**

Version	pin, straight - socket, straight	Connection thread	M8 / M8
Housing main material	PUR	Threaded ring material	Nickel-plated CuZn
Coding	B	Protection degree	IP69K
Contact surface	Gold-plated	LED	No
Rated voltage	60 V	Rated current	3 A
Insulation strength	10 <sup>8</sup> Ω	Temperature range of housing	-25...+80 °C
Tightening torque	M8: 0.5 - 0.6 Nm	Plugging cycles	≥ 100
Pollution severity	3		

**Classifications**

ETIM 6.0	EC001855	ETIM 7.0	EC001855
eClass 9.0	27-06-03-11	eClass 9.1	27-06-03-11
eClass 10.0	27-06-03-11		

**Approvals**

ROHS Conform

**Data sheet**


**SAIL-M8GM8G-5-1.5U**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

**Dimensioned drawing**

**Dimensioned drawing**





Male, straight

Straight socket


**Pole scheme**

**Pole scheme**

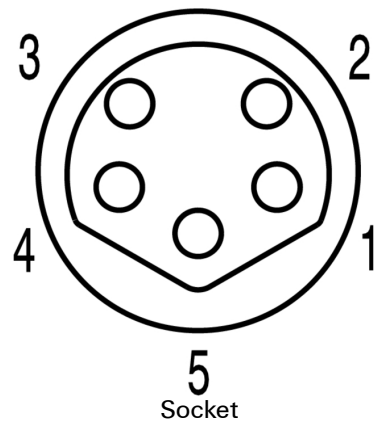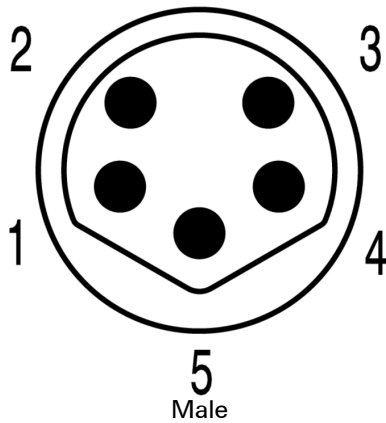

**Wiring diagram**

**The ideal tool: Screwty® with torque function**



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F