

SAIL-7/8G7/8G-5-0.5U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Dimensioned drawing

Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The 7/8" cables tend to be used for power supply applications.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Type	SAIL-7/8G7/8G-5-0.5U
Order No.	2519450050
Version	Sensor/actuator line, 7/8", Number of poles : 5 (4 + PE), 0.5 m, pin, straight - socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
GTIN (EAN)	4050118533880
Qty.	1 pc(s).

Creation date May 2, 2020 8:03:51 AM CEST

SAIL-7/8G7/8G-5-0.5U

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 90 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Number of poles	5 (4 + PE)	Core cross-section	1.5 mm ²
Outside diameter	8.7 mm ± 0.2 mm	Cable length	0.5 m
Shielded	No	Insulation	TPM
Colour coding	brown, white, blue, black, Green/yellow	Sheath material	PUR
Sheathing colour	black	Halogen	No
Temperature range, moving	-20...80 °C	Temperature range, stationary	-50...80 °C
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)	Suitable for cable carriers	No
Torsion resistance	0 °/m	Bending radius, min., moving	7.5 x cable diameter
Resistant to welding beads	No	Configurable cable length	No

General technical data

Version	pin, straight - socket, straight	Connection thread	7/8"
Housing main material	PUR	Threaded ring material	Diecast zinc
Coding	none	Protection degree	IP68, when screwed in
Contact surface	Au (Gold)	LED	No
Rated voltage	300 V	Rated current	9 A
Insulation strength	10 ⁸ Ω	Temperature range of housing	-25...+80 °C
Tightening torque	7/8": 1.5 Nm	Plugging cycles	≥ 100
Pollution severity	3	jumpered	No

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
eClass 9.0	27-06-03-11	eClass 9.1	27-06-03-11
eClass 10.0	27-06-03-11		

Approvals

ROHS Conform


Data sheet

SAIL-7/8G7/8G-5-0.5U


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings


Dimensioned drawing

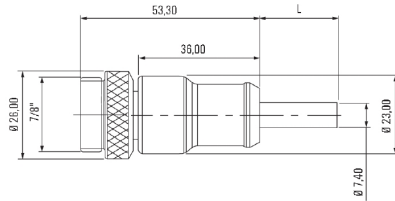

Pole scheme

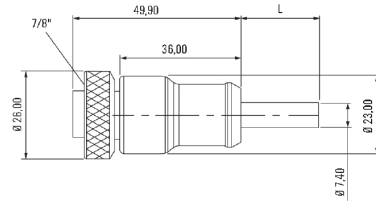

Pole scheme



Wiring diagram

