

SFX-DT 9/24 MC SDR

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

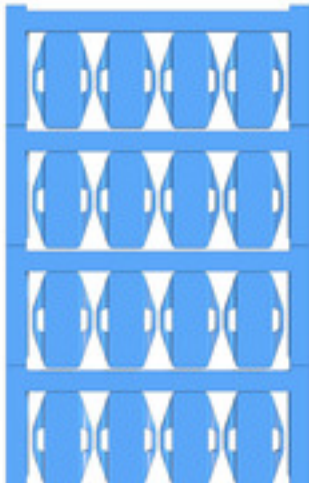

We support our customers in the food industry with detectable marking solutions to ensure the high standards required within the framework of the HACCP concept. Thanks to a metallic filler, our detectable MultiCards can be reliably identified by metal and X-ray detectors. This minimises the risk of product contamination in the production process. Maximum safety is ensured with important product properties, such as corrosion resistance or higher ageing resistance to UV radiation in indoor areas and heat. These properties are regularly tested and confirmed in our own accredited laboratory. Not suitable for direct food contact.

- Detectable by metal and X-ray detectors
- Visually recognisable by blue colour
- Corrosion resistant metallic filler
- Clear and resistant print image
- Available in different versions for a wide variety of marking requirements

General ordering data

Type	SFX-DT 9/24 MC SDR
Order No.	2622440000
Version	Conductor and cable markers, 7 - 40 mm, 24 x 15 mm, blue
GTIN (EAN)	4050118623468
Qty.	32 pc(s).
compatible printer	1324380000

SFX-DT 9/24 MC SDR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

Width	15 mm	Width (inches)	0.591 inch
Height	24 mm	Height (inches)	0.945 inch
Depth	0.8 mm	Depth (inches)	0.031 inch
Net weight	0.71 g		

General data

Colour	blue	Detectible in accordance with Rondotest	4.7 mm Al
Halogen	No	Material	Polyamide 66
Operating temperature range	-40...100 °C	Printed characters	To customer specification
Recommended industries	Food processing industry	Size of labelling field	23.9 x 9 mm
UL 94 flammability rating	HB	Version	Installation with cable ties
Width	15 mm		

Conductor and cable markers

Conductor O.D.	7 - 40 mm	Conductor O.D., max.	40 mm
Conductor O.D., min.	7 mm	Conductor cross-section, max.	500 mm ²
Conductor cross-section, min.	16 mm ²	Halogen	No

Classifications

ETIM 6.0	EC001530	ETIM 7.0	EC001530
eClass 9.0	27-40-04-01	eClass 9.1	27-40-04-01
eClass 10.0	27-40-04-01		

Approvals

ROHS	Conform
------	---------

Downloads

Engineering Data	EPLAN
------------------	-----------------------

Data sheet

SFX-DT 9/24 MC SDR

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

