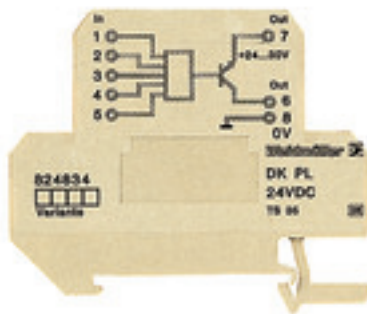


DK-SERIES
DKPL 35 24VDC R-S FLIP-FLOP

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Similar to illustration**General ordering data**

Delivery status	This article will no longer be available in the future.
Available until	2018-11-25
Type	DKPL 35 24VDC R-S FLIP-FLOP
Order No.	8248340014
GTIN (EAN)	4032248143337
Qty.	5 pc(s).

DK-SERIES
DKPL 35 24VDC R-S FLIP-FLOP

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	12 mm	Width (inches)	0.472 inch
Height	65 mm	Height (inches)	2.559 inch
Depth	49.7 mm	Depth (inches)	1.957 inch
Depth including DIN rail	57 mm	Weight	29.6 g
Net weight	29.6 g		

Temperatures

Operating temperature, max.	50 °C	Operating temperature, min.	0 °C
Storage temperature, max.	60 °C	Storage temperature, min.	-40 °C
Operating temperature	0 °C...50 °C	Storage temperature	-40 °C...60 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Input

Number of inputs	5	Input voltage	24 V DC ± 20%
Input current	< 1.5 mA	Rated input level	24 V DC= High, 0 V = Low
Input frequency	3 kHz		

General data

Power consumption	250 mVA	Rail	TS 35
Voltage supply	24 V DC ± 20 %		

Output (digital)

Number of digital outputs	1	Type	NPN-Transistor
Rated switching current	20 mA	Rated switching voltage	24 VDC ±20%

Connection data

Type of connection	Screw connection	Clamping range, rated connection	4 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	4 mm ²
Wire connection cross section AWG, min.	AWG 22	Wire connection cross section AWG, max.	AWG 12

Classifications

ETIM 6.0	EC001417	ETIM 7.0	EC001417
eClass 9.0	27-24-22-16	eClass 9.1	27-21-92-90
eClass 10.0	27-24-22-16		

Approvals

Approvals



ROHS Conform

Data sheet

**DK-SERIES
DKPL 35 24VDC R-S FLIP-FLOP**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Downloads

Approval/Certificate/Document of
Conformity

[DE_PA5400_160309_001.pdf](#)

**DK-SERIES
DKPL 35 24VDC R-S FLIP-FLOP**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

