

WAVESERIES WAS4 CCC DC 4-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com



1-channel signal isolating converter with external power supply: for transmitting and isolating analogue DC current and voltage signals.

The input and output parameters can be configured as required using the DIP switches.

The input and output channels are completely electrically isolated, as is the power supply.

Depending on their housing type, these converters are available in widths of 6.1 mm and 12.5 mm.

These signal isolating converters have international approvals (cULus, ATEX Zone2, FM Div 2, GL,DNV) which enable them to be used worldwide for many applications.

General ordering data

Delivery status	This article will no longer be available in the future.
Available until	2019-08-31
Type	WAS4 CCC DC 4-20/0-20MA
Order No.	8445010000
Version	Signal converter/insulator, Screw connection
GTIN (EAN)	4032248056842
Qty.	1 pc(s).
Alternative product	1176010000

Creation date May 1, 2020 7:32:52 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

WAVESERIES
WAS4 CCC DC 4-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Length	92.4 mm	Length (inches)	3.638 inch
Width	12.5 mm	Width (inches)	0.492 inch
Depth	112.4 mm	Depth (inches)	4.425 inch
Net weight	109 g		

Temperatures

Humidity	40 °C / 93 % rel. humidity, no condensation	Operating temperature, max.	55 °C
Operating temperature, min.	0 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-20 °C	Operating temperature	0 °C...55 °C
Storage temperature	-20 °C...85 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Input current	4...20 mA
Voltage drop	Approx. 5.6 V at 20 mA		

Output

Number of outputs	1	Output current	0...20 mA
Cut-off frequency (-3 dB)	≥ 15 Hz (typ. 20 Hz)	Load impedance current	≤ 500 Ω

General data

Accuracy	± 0.2 % of final value	Configuration	none
Current consumption	< 32 mA @ I _{OUT} = 20 mA	Current-carrying capacity of cross-connect.	≤ 2 A
Galvanic isolation	2-way isolator	Input/Output	4...20 mA/ 0...20 mA
Rail	TS 35	Step response time	≤ 30 ms (typ. 20 ms)
Temperature coefficient	≤ 250 ppm/K of final value	Voltage supply	24 V DC ± 20 %

Insulation coordination

Clearance & creepage distances	≥ 3 mm	EMC standards	EN 55011, EN 61000-6
Galvanic isolation	2-way isolator	Impulse withstand voltage	4 kV
Insulation voltage	1.2 kV _{eff} / 5 s	Insulation voltage input or output/rail	4 kV _{eff} / 1 min.
Insulation voltage input or output/supply	4 kV _{eff} / 1 min.	Pollution severity	2
Rated voltage	300 V	Surge voltage category	III

Output (analogue)

Load resistance current	≤ 500 Ω	Output current	0...20 mA
-------------------------	---------	----------------	-----------

Connection data

Type of connection	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.4 Nm	Tightening torque, max.	0.5 Nm
Clamping range, rated connection	2.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	2.5 mm ²		

Creation date May 1, 2020 7:32:52 AM CEST

Data sheet

**WAVESERIES
WAS4 CCC DC 4-20/0-20MA**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-20
eClass 10.0	27-21-01-20	UNSPSC	31-12-10-07

Product information

Product information This product will soon be replaced by a new product.
 Please do not use with new systems. Please contact our technical support.

Approvals

Approvals




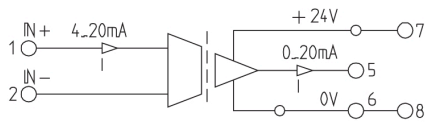
ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD

Data sheet**WAVESERIES
WAS4 CCC DC 4-20/0-20MA**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings**Electric symbol**

WAVESERIES WAS4 CCC DC 4-20/0-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

ZQV 2.5N



Spring connection with tension clamp Technology

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Type	ZQV 2.5N/2 RT	Version
Order No.	1717900000	Accessories, Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190349288	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 BL	Version
Order No.	1717990000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349295	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 SW	Version
Order No.	1718080000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349301	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 GE	Version
Order No.	1693800000	Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190883621	
Qty.	60 pc(s).	


Data sheet

**WAVESERIES
WAS4 CCC DC 4-20/0-20MA**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	WS 10/5 MC NE WS	Version	
Order No.	1635000000		WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller,
GTIN (EAN)	4008190261948		Allen-Bradley, white
Qty.	720 pc(s).		