

WAVESERIES

WAZ5 VCC 0-10V/4-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Do not use product for new
developments



1-channel signal isolating converter with external power supply: for transmitting and isolating analogue DC current and voltage signals.

The input and output parameters can be configured as required using the DIP switches.

The input and output channels are completely electrically isolated, as is the power supply.

Depending on their housing type, these converters are available in widths of 6.1 mm and 12.5 mm.

These signal isolating converters have international approvals (cULus, ATEX Zone2, FM Div 2, GL,DNV) which enable them to be used worldwide for many applications.

General ordering data

Type	WAZ5 VCC 0-10V/4-20MA
Order No.	8540300000
Version	Signal converter/insulator, Tension-clamp connection
GTIN (EAN)	4032248180684
Qty.	1 pc(s).

WAVESERIES
WAZ5 VCC 0-10V/4-20mA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Length	92.4 mm	Length (inches)	3.638 inch
Width	17.5 mm	Width (inches)	0.689 inch
Depth	112.4 mm	Depth (inches)	4.425 inch
Net weight	101.1 g		

Temperatures

Operating temperature, max.	55 °C	Operating temperature, min.	0 °C
Storage temperature, max.	85 °C	Storage temperature, min.	-20 °C
Operating temperature	0 °C...55 °C	Storage temperature	-20 °C...85 °C

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Input

Number of inputs	1	Input voltage	0...10 V
Input resistance, voltage	typ. 100 kΩ		

Output

Number of outputs	1	Output current	4...20 mA
Cut-off frequency (-3 dB)	10 Hz	Load impedance current	≤ 600 Ω

General data

Accuracy	0.2 %	Configuration	none
Current-carrying capacity of cross-connect.	≤ 2 A	Galvanic isolation	3-way isolator
Input/Output	0...10 V/ 4...20 mA	Power consumption	< 1.5 W @ I _{OUT} = 20 mA
Rail	TS 35	Step response time	≤ 45 ms
Temperature coefficient	± 250 ppm/K	Voltage supply	24 V DC ± 25 %

Insulation coordination

Clearance & creepage distances	≥ 3 mm	EMC standards	EN 55011, EN 61000-6
Galvanic isolation	3-way isolator	Impulse withstand voltage	4 kV
Insulation voltage	2 kV _{eff} / 5 s	Insulation voltage input or output/rail	4 kV _{eff} / 1 min.
Insulation voltage input or output/supply	2 kV _{eff} / 5 s	Pollution severity	2
Rated voltage	300 V	Surge voltage category	III

Connection data

Type of connection	Tension-clamp connection	Stripping length, rated connection	7 mm
Clamping range, rated connection	1.5 mm ²	Clamping range, min.	0.5 mm ²
Clamping range, max.	2.5 mm ²		

Classifications

ETIM 6.0	EC002653	ETIM 7.0	EC002653
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-20
eClass 10.0	27-21-01-20	UNSPSC	31-12-10-07

Data sheet**WAVESERIES
WAZ5 VCC 0-10V/4-20MA**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Product information**

Product information This product will soon be replaced by a new product.
Please do not use with new systems. Please contact our technical support.

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
User Documentation	Instruction sheet



Data sheet

**WAVESERIES
WAZ5 VCC 0-10V/4-20MA**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Electric symbol

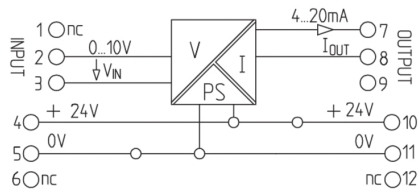

WAVESERIES WAZ5 VCC 0-10V/4-20MA

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

ZQV 2.5N



Spring connection with tension clamp Technology

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Type	ZQV 2.5N/2 RT	Version
Order No.	1717900000	Accessories, Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190349288	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 BL	Version
Order No.	1717990000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349295	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 SW	Version
Order No.	1718080000	Accessories, Cross-connector, 24 A
GTIN (EAN)	4008190349301	
Qty.	60 pc(s).	
Type	ZQV 2.5N/2 GE	Version
Order No.	1693800000	Z-series, Cross-connector, 24 A
GTIN (EAN)	4008190883621	
Qty.	60 pc(s).	


Data sheet

**WAVESERIES
WAZ5 VCC 0-10V/4-20MA**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with laser printer, PrintJet ADVANCED, plotter or MC-Mobilo is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	WS 10/5 MC NE WS	Version	
Order No.	1635000000		WS, Terminal marker, 10 x 5 mm, Pitch in mm (P): 5.00 Weidmueller,
GTIN (EAN)	4008190261948		Allen-Bradley, white
Qty.	720 pc(s).		