


Field bus components

FBCON PA CG/M12 8WAY LIMITER

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

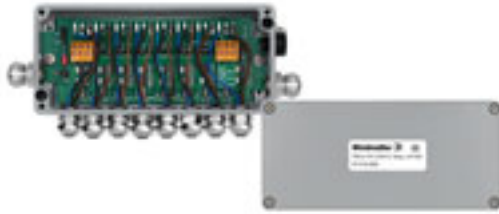

For standard industrial applications (non-hazardous areas), PROFIBUS PA junction boxes and limiters are available as 1-way, 2-way, 4-way, and 8-way distributors. FBCon limiters are designed to protect connected field devices from over voltages and short circuits. As voltage-limiting protective elements, suppressor diodes are used. Due to the integrated current limitation, the segment is also protected against short circuit on a spur line. EMC cable glands, protection class IP66 and a wide operating temperature range safely protect your connections in harsh environments.

Functionality

- EMC cable glands for trunk and spurs
- M12 connector for spurs
- External earthing stud
- Pressure equalizing element
- Protection class IP66
- Aluminium and stainless-steel versions
- Profibus PA / Foundation Fieldbus compatible

Note: The use of FBCon products with aluminum enclosures and / or M12 connectors is not recommended in strongly saline environments.

General ordering data

Type	FBCON PA CG/M12 8WAY LIMITER
Order No.	8714190000
Version	Standard distributor with current limiting, 8-channel distributor LIMITER, IP66
GTIN (EAN)	4032248398270
Qty.	1 pc(s).

**Field bus components
FBCON PA CG/M12 8WAY LIMITER**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Dimensions and weights

Length	175 mm	Length (inches)	6.89 inch
Width	80 mm	Width (inches)	3.15 inch
Height	58 mm	Height (inches)	2.283 inch
Net weight	890 g		

Temperatures

Operating temperature, max.	55 °C	Operating temperature, min.	-40 °C
Storage temperature, max.	80 °C	Storage temperature, min.	-40 °C
Operating temperature	-40 °C...55 °C	Storage temperature	-40 °C...80 °C

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical properties

Protection degree IP66

Classifications

ETIM 6.0	EC001604	ETIM 7.0	EC001604
eClass 9.0	27-24-26-08	eClass 9.1	27-24-26-08
eClass 10.0	27-24-26-08	UNSPSC	26-12-16-03

Approvals

Approvals



ROHS Conform



Downloads

Approval/Certificate/Document of Conformity	Declaration of Conformity.pdf
Brochure/Catalogue	CAT 8 SAI 15/16 EN
Software	WI-Segment-Calculator
User Documentation	assembly instruction german / english Application-Guide-Planning and installing Fieldbus networks-using-FBCon_english_deutsch FBCon Segment Calculator_english

**Field bus components
FBCON PA CG/M12 8WAY LIMITER**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

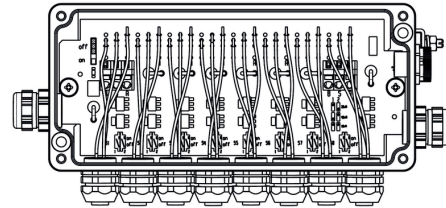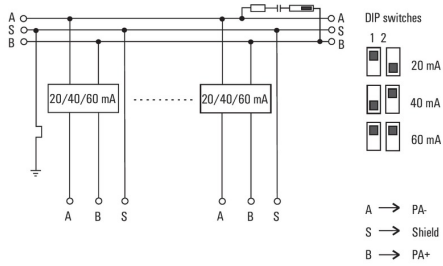

**Field bus components
FBCON PA CG/M12 8WAY LIMITER**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories
Brass cable glands, IP 68


Screwed joints that comply with the high demands of class of protection IP 68

General ordering data

Type	VG 9-MS68	Version
Order No.	1569070000	VG MS (standard brass cable gland), Cable glands, PG 9, 6 mm, OD
GTIN (EAN)	4008190116262	min. 4 - OD max. 8 mm, IP54, IP66, IP67, IP68 - 5 bar (30 min.),
Qty.	50 pc(s).	IP69K, Brass, nickel-plated
Type	VG M16 - MS 68	Version
Order No.	1772210000	VG MS (standard brass cable gland), Cable glands, M 16, 7 mm, OD
GTIN (EAN)	4032248129867	min. 4 - OD max. 8 mm, IP54, IP66, IP67, IP68 - 5 bar (30 min.),
Qty.	50 pc(s).	IP69K, Brass, nickel-plated

GWDR - neoprene flat gasket

The range of cable glands is rounded off by a large number of accessories.


General ordering data

Type	GWDR PG9-NP	Version
Order No.	1719550000	GWDR NP (flat gasket - neoprene), Sealing ring, PG 9, Neoprene
GTIN (EAN)	4008190352813	
Qty.	100 pc(s).	

**Field bus components
FBCON PA CG/M12 8WAY LIMITER**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

PVC/PE black (FBC)

PVC



The most reliable way of achieving connections between two I/O slaves or between the control and one I/O subscriber is by way of pre-assembled cables. The line of cables covers PROFIBUS, CANopen, DeviceNet™, EtherCAT and Ethernet.

Cable Material

General ordering data

Type	FBC PA M12 M 2M	Version
Order No.	1785120200	Bus line, One end without connector, M12, Number of poles: 2, 2 m,
GTIN (EAN)	4032248194803	pin, straight, Shielded: Yes, LED: No, Sheath material: PVC, Halogen:
Qty.	1 pc(s).	Yes

M12



Protective caps protect unassigned plug-in stations against external influences.

General ordering data

Type	SAI-SK-M12	Version
Order No.	9456050000	Protected component assemblies, Protective cap
GTIN (EAN)	4008190304058	
Qty.	30 pc(s).	

**Field bus components
FBCON PA CG/M12 8WAY LIMITER**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Brass cable glands, standard**

For sealing surplus threaded holes to maintain the IP class of protection

General ordering data

Type	VP 9-MS65	Version
Order No.	0294700000	VPMS (blanking plug in brass), Blanking plug, PG 9, 5 mm, Brass,
GTIN (EAN)	4008190005887	nickel-plated
Qty.	100 pc(s).	