

VSPC VSPC BASE 2/4CH FG

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com



Base element for the pluggable VSPC arresters. Integrated PE foot in the base of the impedance-neutral VSPC BASE and **floating earth PE connection (FG)** via integrated **sparkover gap**, safely discharges up to 20 kA (8/20 μ s) and 2.5 kA (10/350 μ s) to PE. Suitable for unearthened signal circuits.

General ordering data

Type	VSPC BASE 2/4CH FG
Order No.	8924300000
Version	Surge protection, Flange-mounted housing, 10 A, IEC 61643-21, IEC 62305, DIN EN 60079-0:2009, DIN EN 60079-11:2007, DIN EN 60079-26:2007, DIN EN 61241-11:2006
GTIN (EAN)	4032248695942
Qty.	1 pc(s).

Creation date May 1, 2020 5:10:46 AM CEST

VSPC
VSPC BASE 2/4CH FG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	17.8 mm	Width (inches)	0.701 inch
Height	90 mm	Height (inches)	3.543 inch
Depth	69 mm	Depth (inches)	2.717 inch
Net weight	74 g		

Temperatures

Humidity	5...96 %	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	80 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...80 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL 497b Certificate
----------------------	---------	----------------	---------------------

CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I _I	300 mA
Internal inductance, max. L _I	0 µH		

General data

Colour	black	Design	Terminal, miscellaneous
Optical function display	No	Protection degree	IP20
Rail	TS 35, TS 35 x 7.5	Segment	Measurement - Monitoring - Setting
UL 94 flammability rating	V-0	Version	Flange-mounted housing

Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

Rated data IEC / EN

Voltage type	AC/DC	Standards	IEC 61643-21, IEC 62305, DIN EN 60079-0:2009, DIN EN 60079-11:2007, DIN EN 60079-26:2007, DIN EN 61241-11:2006
Leakage current at U _n	0 µA	Dielectric strength at FG against PE	≥ 500 V
Rated current I _N	10 A	Signalling contact	No

Further details of approvals

GOST certificate	GOST-Zertifikat
------------------	-----------------

VSPC
VSPC BASE 2/4CH FG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Connection data**

Type of connection	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm
Clamping range, min.	0.5 mm ²	Clamping range, max.	4 mm ²
Wire cross-section, solid, min.	0.5 mm ²	Wire cross-section, solid, max.	4 mm ²
Wire connection cross section, finely stranded, max.	2.5 mm ²	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm ²
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm ²	Connection cross-section, stranded, min.	0.5 mm ²
Connection cross-section, stranded, max.	2.5 mm ²	Blade size	0.6 x 3.5 mm

Classifications

ETIM 6.0	EC000472	ETIM 7.0	EC000472
eClass 9.0	27-13-08-03	eClass 9.1	27-13-08-07
eClass 10.0	27-13-08-03	UNSPSC	30-21-19-21

Approvals

Approvals



ROHS

Conform

Downloads


Approval/Certificate/Document of Conformity	CE PAPER Declaration of Conformity
Brochure/Catalogue	CAT 4.4 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	Instruction sheet

**VSPC
VSPC BASE 2/4CH FG**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

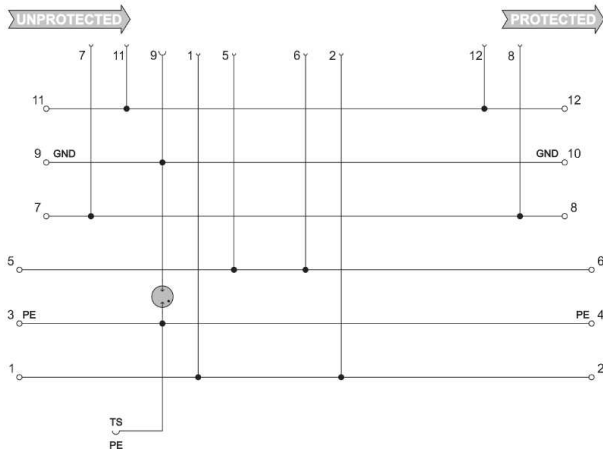

Circuit diagram

Cate- gory	Testing pulse	Surge voltage	Surge current	Pulse	Type
C1	Quick-rising edge	0.5 - 2 kV with 1.2/50 µs	0.25 - 1 kA mit 8/20 µs	300	Surge voltage arrester
C2	Quick-rising edge	2 - 10 kV with 1.2/50 µs	1 - 5 kA mit 8/20 µs	10	Surge voltage arrester
C3	Quick-rising edge	≥ 1 kV with 1 kV/µs	10 - 100 A mit 10/10000 µs	300	Surge voltage arrester
D1	High power	≥ 1 kV	0.5 - 2.5 kA mit 10/350 µs	2	Arrester for lightning current and surge voltages

Discharge capacity

VSPC VSPC BASE 2/4CH FG

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Mating connector (fully pluggable)

Three-wire and four-wire measuring bridges



3 or 4-wire system protection includes the following signals:

- PT100, measuring bridges, DMS sensors, measuring bridges, ...
- Pluggable arrester, for interruption-free and impedance-neutral plug-in and pull-out
- Can be tested with V-TEST testing device
- Space-saving design for up to 4 binary signals
- Version with floating-earth PE connection used to avoid interference currents that result from differences in voltage potential
- For use in compliance with the IEC 62305 and IEC61643-22 (D1, C1, C2 and C3) installation standards
- Integrated PE foot safely discharges up to 20 kA (8/20 µs) and 2.5 kA (10/350 µs) to the PE
- Colour coding of the voltage levels for fast identification in the cabinet
- Safety function through coding elements for different voltage levels

General ordering data

Type	VSPC 3/4WIRE 5VDC	Version
Order No.	8924540000	Surge protection for instrumentation and control, 3 V, 450 mA, IEC
GTIN (EAN)	4032248696185	61643-21
Qty.	1 pc(s).	
Type	VSPC 3/4WIRE 24VDC	Version
Order No.	8924550000	Surge protection for instrumentation and control, 24 V, 450 mA, IEC
GTIN (EAN)	4032248696192	61643-21
Qty.	1 pc(s).	

Surge protection with components, without alert contact



- Pluggable arrester with ungrounded varistors (MOV) for use as protection circuit for coils
- For applications as surge protection, external wire links to GND must be connected at the VSPC BASE FG (e.g. connection 8-10 and 9-5)
- Pluggable arrester, with no-interrupt and impedance-neutral plug-in and pull-out
- Can be tested with the V-TEST testing device
- Integrated PE foot in the VSPC BASE, safely discharges up to 20 kA (8/20 µs) and 2.5 kA (10/350 µs) to PE

General ordering data

Type	VSPC GDT 2CH 150VAC/230 ...	Version
Order No.	8924590000	Surge protection for instrumentation and control, 110 V, 150 V, 2 A,
GTIN (EAN)	4032248696239	According to IEC61643-21
Qty.	1 pc(s).	

**VSPC
VSPC BASE 2/4CH FG**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Mating connector (fully pluggable)

Type	VSPC GDT 2CH 90V	Version
Order No.	8924570000	Surge protection for instrumentation and control, 48 V, 68 V, 2 A,
GTIN (EAN)	4032248696215	According to IEC61643-21
Qty.	1 pc(s).	
Type	VSPC TAZ 4CH 24V	Version
Order No.	8924650000	Surge protection for instrumentation and control, 24 V, 28 V, 10 A,
GTIN (EAN)	4032248696291	According to IEC61643-21
Qty.	1 pc(s).	

Surge protection with components (MOV), without alert contact


- Pluggable arrester with ungrounded varistors (MOV) for use as protection circuit for coils
- For applications as surge protection, external wire links to GND must be connected at the VSPC BASE FG (e.g. connection 8-10 and 9-5)
- Pluggable arrester, with no-interrupt and impedance-neutral plug-in and pull-out
- Can be tested with the V-TEST testing device
- Integrated PE foot in the VSPC BASE, safely discharges up to 20 kA (8/20 µs) and 2.5 kA (10/350 µs) to PE

General ordering data

Type	VSPC MOV 2CH 24V	Version
Order No.	8924600000	Surge protection for instrumentation and control, 24 V, 30 V, 10 A,
GTIN (EAN)	4032248696246	IEC 61643-21
Qty.	1 pc(s).	
Type	VSPC MOV 2CH 230V	Version
Order No.	8924610000	Surge protection for instrumentation and control, 230 V, 230 V, 10 A,
GTIN (EAN)	4032248696253	IEC 61643-21
Qty.	1 pc(s).	

Data sheet

**VSPC
VSPC BASE 2/4CH FG**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories

Cable tie tools



Cable tie tools are compact tools with which the cable tie is tightened and the excess tie cut off in one operation

General ordering data

Type	KABELBINDERZANGE RT-1	Version
Order No.	129600000	Miscellaneous tools
GTIN (EAN)	4008190029944	
Qty.	1 pc(s).	

Plus



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	DEK 5/5 PLUS MC NE WS	Version
Order No.	185449000	Dekafix, Terminal marker, 5 x 5 mm, Pitch in mm (P): 5.00
GTIN (EAN)	4032248393596	Weidmueller, white
Qty.	1,000 pc(s).	

VSPC VSPC BASE 2/4CH FG

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Slotted screwdriver

Slotted screwdriver with rounded blade SD DIN 5265, ISO 2380/2, output to DIN 5264, ISO 2380/1. ChromTop tip, SoftFinish grip



General ordering data

Type	SDS 0.6X3.5X200	Version
Order No.	9010110000	Screwdriver, Blade width (B): 3.5 mm, Blade length: 200 mm, Blade thickness (A): 0.6 mm
GTIN (EAN)	4032248300754	
Qty.	1 pc(s).	

EMC accessories for VSPC and VSSC series

Versatile accessories round off the surge protection range. E.g. the all-purpose measuring device V-TEST, which is used to check the function of pluggable arresters such as VSPC.



General ordering data

Type	EMC-CONTACT	Version
Order No.	1067520000	Surge protection, Surge protection
GTIN (EAN)	4032248821051	
Qty.	1 pc(s).	
Type	EMC-SET	Version
Order No.	1067470000	Surge protection, Surge protection
GTIN (EAN)	4032248821037	
Qty.	1 pc(s).	
Type	EMC-TIE	Version
Order No.	1067490000	Surge protection, Surge protection
GTIN (EAN)	4032248821044	
Qty.	1 pc(s).	

Data sheet**VSPC
VSPC BASE 2/4CH FG**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Earthing module**

- Can be applied to unassigned wires
- Can be used during initial commissioning and maintenance
- All sensor cables connected to the VSPC are earthed.
- Can be plugged into all VSPC base sockets

General ordering data

Type	VSPC GROUND	Version
Order No.	8924680000	Adapter, 500 mA
GTIN (EAN)	4032248696321	
Qty.	1 pc(s).	