

**Pressing tool
HTF 48**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

**Crimping tools for flat blade connectors and flat blade receptacles with open or rolled crimping claw**

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

General ordering data

| | |
|------------|--|
| Type | HTF 48 |
| Order No. | 9013080000 |
| Version | Pressing tool, Crimping tool for contacts, 0.5mm ² , 2.5mm ² , B-Crimp |
| GTIN (EAN) | 4008 1901 13056 |
| Qty. | 1 pc(s). |

Creation date May 1, 2020 3:29:24 AM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

Data sheet

**Pressing tool
HTF 48**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|--------|--------|----------------|------------|
| Width | 200 mm | Width (inches) | 7.874 inch |
| Weight | 438 g | Net weight | 453.98 g |

Environmental Product Compliance

| | |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

Technical data

| | |
|---------|---|
| Version | Mechanical, without interchangeable inserts |
|---------|---|

Description of contact

| | | | |
|-----------------------------------|---------------------|-----------------------------------|---------------------|
| Type of contact | F-plug / -sleeve | Crimping range, min. | 0.5 mm ² |
| Crimping range, max. | 2.5 mm ² | Plug width | 4.8 mm |
| Conductor cross-section, max. AWG | AWG 14 | Conductor cross-section, min. AWG | AWG 21 |

tool data crimping

| | | | |
|---------------------------------------|---------------------|--------------------------|---------------------|
| Crimping profile 1, min. | 0.5 mm ² | Crimping type/profile | B-Crimp |
| Wire end ferrules cross-section, min. | 0.5 mm ² | Crimping profile 1, max. | 1 mm ² |
| Wire end ferrules cross-section, max. | 2.5 mm ² | Crimping profile 2, min. | 1.5 mm ² |
| Crimping profile 2, max. | 2.5 mm ² | | |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC000168 | ETIM 7.0 | EC000168 |
| eClass 9.0 | 21-04-38-11 | eClass 9.1 | 21-04-38-11 |
| eClass 10.0 | 21-04-38-11 | UNSPSC | 23-17-16-04 |

Approvals

Approvals



Downloads


| | |
|--------------------|--------------------------------------|
| Brochure/Catalogue | CAT 6 TOOLS 15/16 EN |
|--------------------|--------------------------------------|

Data sheet

**Pressing tool
HTF 48**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

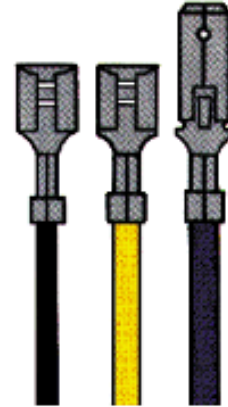

Data sheet**Pressing tool
HTF 48**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Accessories**Accessories / replacement parts****Crimping tools for flat blade connectors and flat blade receptacles with open or rolled crimping claw**

- Ratchet guarantees precise crimping
- Release option in the event of incorrect operation
- With end stop for exact positioning of the contacts

General ordering data

| | | |
|------------|----------------------------|---------------------------------|
| Type | ERTE AN HTF 48 | Version |
| Order No. | 1246420000 | Pressing tool, Replacement part |
| GTIN (EAN) | 4050118034738 | |
| Qty. | 1 pc(s). | |