

SAIL-VSA-0.8U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



Weidmüller can supply valve plugs as connecting lines with M12 plugs and one end without connector. The status of the valve plug is shown by an LED. Every valve plug is fitted with a protective circuit. The Weidmüller range includes valve plugs of type A, B and C to DIN and industry standards. In the plugged condition they achieve IP 67 class of protection. The outlet direction is also a decisive factor: Weidmüller can also supply 0° versions, i.e. the cable outlet direction is located at the PE contact.

General ordering data

| | |
|------------|---|
| Type | SAIL-VSA-0.8U |
| Order No. | 9457710080 |
| Version | Valve plug, One end without connector - valve plug, A |
| GTIN (EAN) | 4032248472086 |
| Qty. | 1 pc(s). |

Creation date April 30, 2020 10:23:28 PM CEST

Catalogue status 17.04.2020 / We reserve the right to make technical changes.

SAIL-VSA-0.8U**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Technical data**Dimensions and weights**

| | |
|------------|------|
| Net weight | 64 g |
|------------|------|

Temperatures

| | | | |
|-----------------------------------|-------|-----------------------------------|--------|
| Operating temperature range, max. | 80 °C | Operating temperature range, min. | -25 °C |
| Operating temperature, max. | 80 °C | Operating temperature, min. | -25 °C |

Technical specifications for cable

| | | | |
|----------------------------------|---------------------------|-------------------------------|---------------------|
| Number of poles | 3 | Core cross-section | 0.5 mm ² |
| Outside diameter | 4.6 mm ± 0.2 mm | Cable length | 0.8 m |
| Shielded | No | Insulation | PP |
| Colour coding | brown, blue, Green/yellow | Sheath material | PUR |
| Sheathing colour | black | Halogen | No |
| Temperature range, moving | -25...80 °C | Temperature range, stationary | -50...80 °C |
| Suitable for cable carriers | Yes | Torsion resistance | 0 °/m |
| Bending radius, min., stationary | 5 x cable diameter | Bending radius, min., moving | 10 x cable diameter |
| Acceleration | 5 m/s ² | Speed | 200 m/min |
| Bending cycles | 2 Mio | Resistant to welding beads | No |

General technical data

| | | | |
|---|--|-------------------|---------------------------|
| Version | One end without connector - valve plug | Connection thread | Miscellaneous |
| Coding | Design A (18 mm) | Protection degree | IP67, when screwed in |
| Contact surface | tinned | LED | Yes |
| Rated voltage | 24 V | Rated current | 4 A |
| Temperature range of housing | -25...+80 °C | Tightening torque | Mounting screw M3: 0.4 Nm |
| All valve plugs are fitted with protective circuits | Zener diode | | |

Classifications

| | | | |
|-------------|-------------|------------|-------------|
| ETIM 6.0 | EC001855 | ETIM 7.0 | EC001855 |
| eClass 9.0 | 27-06-03-12 | eClass 9.1 | 27-06-03-11 |
| eClass 10.0 | 27-06-03-12 | UNSPSC | 30-21-18-10 |

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Downloads

| | |
|--------------------|-----------------------------------|
| Brochure/Catalogue | FL FIELDWIRING EN |
|--------------------|-----------------------------------|


Data sheet

SAIL-VSA-0.8U


Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Drawings

Dimensioned drawing

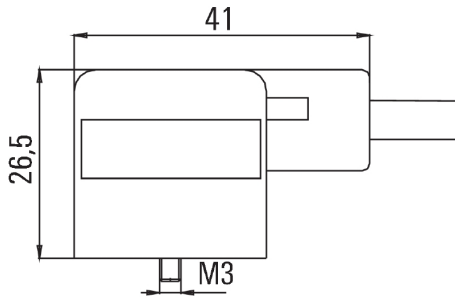

Pole scheme

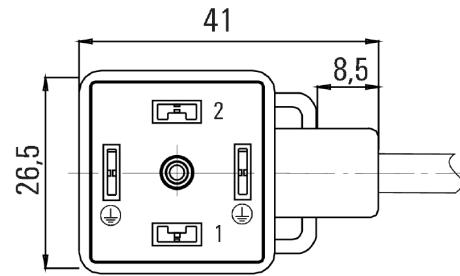

Wiring diagram

