



## Data sheet | Item number: 769-208/281-410

2-pin component carrier block; with 2 jumper positions; with diode 1N4007; anode, left side; for DIN-rail 35 x 15 and 35 x 7.5; 4 mm<sup>2</sup>; gray

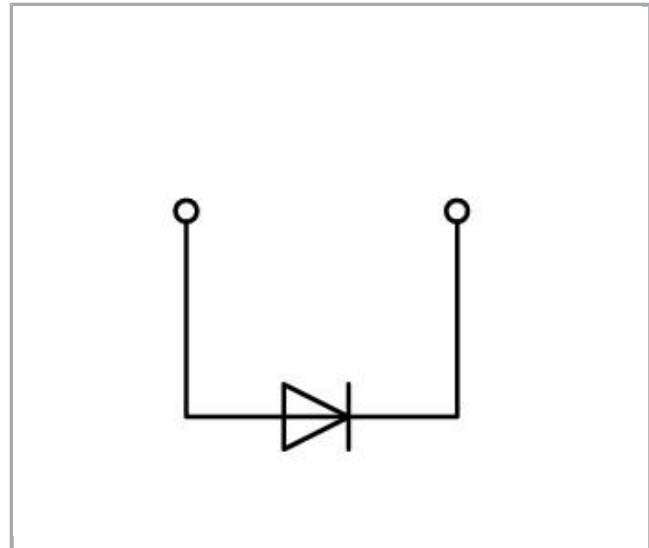

[www.wago.com/769-208/281-410](http://www.wago.com/769-208/281-410)

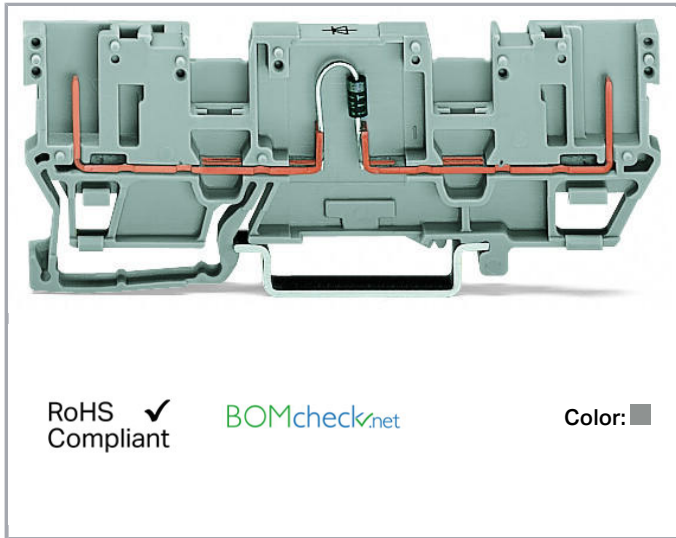

### Data

#### Electrical data

Nominal voltage	250 V
Reverse voltage	1,000 V

#### Ratings per IEC/EN 60664-1

Rated current	0.5 A
---------------	-------

#### Connection data

Total number of potentials	1
Number of levels	1
Type of wiring	Front-entry wiring

#### Geometrical Data

Width	5 mm / 0.197 inch
Height from upper-edge of DIN-35 rail	28.5 mm / 1.122 inch
Depth	87.5 mm / 3.445 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Mechanical data

Design	horizontal
Type of mounting	DIN-35 rail
Marking level	Center marking

## Material Data




Color	gray
Insulating material	Polyamide 66 (PA 66)
Fire load	0.17 MJ
Weight	7.5 g

## Commercial data

Product Group	18 (X-COM-System)
Packaging type	BOX
Country of origin	DE
GTIN	4045454198367
Customs Tariff No.	85369010000

## Approvals / Certificates

### Country specific Approvals

Logo	Approval	Additional Approval Text	Certificate name
	CCA DEKRA Certification B.V.	EN 60947	NTR NL-7626
	CSA DEKRA Certification B.V.	C22.2 No. 158	1101144
	KEMA/KEUR DEKRA Certification B.V.	EN 60947	2190419.01

### Ship Approvals

Logo	Approval	Additional Approval Text	Certificate name
	ABS	EN 60947	20-

Subject to changes. Please also observe the further product documentation!



American Bureau of Shipping

HG1941090-PDA





**DNV GL**  
Det Norske Veritas, Germanischer Lloyd

TAE00001V2




## Counterpart

## Compatible products

### Test Accessories














	<b>Item no.: 210-137</b> Test plug; 2.3 mm Ø; with 500 mm cable; yellow	<a href="http://www.wago.com/210-137">www.wago.com/210-137</a>
	<b>Item no.: 280-404</b> Test plug adapter; 5 mm wide; for test plug 210-137 (2.3 mm Ø); suitable for 1.5 mm <sup>2</sup> - 4 mm <sup>2</sup> tbs; gray	<a href="http://www.wago.com/280-404">www.wago.com/280-404</a>
	<b>Item no.: 280-418</b> Test plug module; modular; suitable for all WAGO 280 and 780 Series rail-mounted terminal blocks with jumper slots in the current bar; gray	<a href="http://www.wago.com/280-418">www.wago.com/280-418</a>
	<b>Item no.: 280-419</b> Spacer module; modular; bridging commoned terminal blocks; gray	<a href="http://www.wago.com/280-419">www.wago.com/280-419</a>

### Jumper









	<b>Item no.: 249-123</b> Push-in type wire jumper; insulated; wire length 180 mm; Conductor cross section 0.75 mm <sup>2</sup>	<a href="http://www.wago.com/249-123">www.wago.com/249-123</a>
	<b>Item no.: 249-125</b> Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm <sup>2</sup>	<a href="http://www.wago.com/249-125">www.wago.com/249-125</a>
	<b>Item no.: 249-126</b> Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm <sup>2</sup>	<a href="http://www.wago.com/249-126">www.wago.com/249-126</a>

**Item no.: 249-127**

Subject to changes. Please also observe the further product documentation!

	Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm <sup>2</sup>	<a href="http://www.wago.com/249-127">www.wago.com/249-127</a>
	<b>Item no.: 280-402</b> Adjacent jumper; insulated; IN = IN terminal block; gray	<a href="http://www.wago.com/280-402">www.wago.com/280-402</a>
	<b>Item no.: 280-409</b> Alternate jumper; insulated; IN = IN terminal block; gray	<a href="http://www.wago.com/280-409">www.wago.com/280-409</a>
	<b>Item no.: 780-452</b> Staggered jumper; insulated; from 1 to 2; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-452">www.wago.com/780-452</a>
	<b>Item no.: 780-453</b> Staggered jumper; insulated; from 1 to 3; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-453">www.wago.com/780-453</a>
	<b>Item no.: 780-454</b> Staggered jumper; insulated; from 1 to 4; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-454">www.wago.com/780-454</a>
	<b>Item no.: 780-455</b> Staggered jumper; insulated; from 1 to 5; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-455">www.wago.com/780-455</a>
	<b>Item no.: 780-456</b> Staggered jumper; insulated; from 1 to 6; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-456">www.wago.com/780-456</a>
	<b>Item no.: 780-457</b> Staggered jumper; insulated; from 1 to 7; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-457">www.wago.com/780-457</a>
	<b>Item no.: 780-458</b> Staggered jumper; insulated; from 1 to 8; Spacing: 5 mm; suitable for 2-conductor female plugs; gray	<a href="http://www.wago.com/780-458">www.wago.com/780-458</a>
<b>End plate</b>		
	<b>Item no.: 769-309</b> End and intermediate plate; 1.1 mm thick; gray	<a href="http://www.wago.com/769-309">www.wago.com/769-309</a>
	<b>Item no.: 769-310</b> End and intermediate plate; 1.1 mm thick; orange	<a href="http://www.wago.com/769-310">www.wago.com/769-310</a>
	<b>Item no.: 769-313</b> Separator plate; 1.1 mm thick; oversized; orange	<a href="http://www.wago.com/769-313">www.wago.com/769-313</a>
<b>Marking accessories</b>		
	<b>Item no.: 2009-145</b> Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>
	<b>Item no.: 2009-145/000-002</b> Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white	<a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a>
	<b>Item no.: 2009-145/000-005</b> Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red	<a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a>

Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 2009-145/000-006</b>                  Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue</p>	<a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a>
	<p><b>Item no.: 2009-145/000-007</b>                  Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white</p>	<a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a>
	<p><b>Item no.: 2009-145/000-012</b>                  Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange</p>	<a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a>
	<p><b>Item no.: 2009-145/000-023</b>                  Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green</p>	<a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a>
	<p><b>Item no.: 2009-145/000-024</b>                  Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet</p>	<a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a>
	<p><b>Item no.: 248-501</b>                  Miniature WSB Quick marking system; plain; Marker width 5 mm; 10 strips with 10 markers per card</p>	<a href="http://www.wago.com/248-501">www.wago.com/248-501</a>
	<p><b>Item no.: 248-501/000-002</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow</p>	<a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>
	<p><b>Item no.: 248-501/000-005</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red</p>	<a href="http://www.wago.com/248-501/000-005">www.wago.com/248-501/000-005</a>
	<p><b>Item no.: 248-501/000-006</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue</p>	<a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>
	<p><b>Item no.: 248-501/000-007</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray</p>	<a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>
	<p><b>Item no.: 248-501/000-012</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange</p>	<a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a>
	<p><b>Item no.: 248-501/000-017</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green</p>	<a href="http://www.wago.com/248-501/000-017">www.wago.com/248-501/000-017</a>
	<p><b>Item no.: 248-501/000-023</b>                  Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green</p>	<a href="http://www.wago.com/248-501/000-023">www.wago.com/248-501/000-023</a>

Subject to changes. Please also observe the further product documentation!

Item no.: 248-501/000-024

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)

## assembling



Item no.: 209-106

Mounting carrier; for isolated mounting on DIN 35 rails; gray

[www.wago.com/209-106](http://www.wago.com/209-106)

## Female plug



Item no.: 769-101

1-conductor female plug; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-101](http://www.wago.com/769-101)

Item no.: 769-101/000-006

1-conductor female plug; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-101/000-006](http://www.wago.com/769-101/000-006)

Item no.: 769-101/000-016

1-conductor female plug; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow[www.wago.com/769-101/000-016](http://www.wago.com/769-101/000-016)

Item no.: 769-101/022-000

1-conductor female plug; angled; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-101/022-000](http://www.wago.com/769-101/022-000)

Item no.: 769-101/022-016

1-conductor female plug; angled; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow[www.wago.com/769-101/022-016](http://www.wago.com/769-101/022-016)

Item no.: 769-102

1-conductor female plug; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-102](http://www.wago.com/769-102)

Item no.: 769-102/000-006

1-conductor female plug; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-102/000-006](http://www.wago.com/769-102/000-006)

Item no.: 769-102/000-036

1-conductor female plug; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; gray, green-yellow[www.wago.com/769-102/000-036](http://www.wago.com/769-102/000-036)

Item no.: 769-102/000-037

1-conductor female plug; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; green-yellow, gray[www.wago.com/769-102/000-037](http://www.wago.com/769-102/000-037)

Item no.: 769-102/022-000

1-conductor female plug; angled; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-102/022-000](http://www.wago.com/769-102/022-000)

Item no.: 769-103

1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-103](http://www.wago.com/769-103)

Item no.: 769-103/000-006

1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-103/000-006](http://www.wago.com/769-103/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 769-103/000-036**  
1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/769-103/000-036](http://www.wago.com/769-103/000-036)



**Item no.: 769-103/000-037**  
1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/769-103/000-037](http://www.wago.com/769-103/000-037)

**Item no.: 769-103/000-038**  
1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/769-103/000-038](http://www.wago.com/769-103/000-038)



**Item no.: 769-103/000-039**  
1-conductor female plug; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/769-103/000-039](http://www.wago.com/769-103/000-039)

**Item no.: 769-103/022-000**  
1-conductor female plug; angled; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-103/022-000](http://www.wago.com/769-103/022-000)



**Item no.: 769-104**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-104](http://www.wago.com/769-104)

**Item no.: 769-104/000-006**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; blue

[www.wago.com/769-104/000-006](http://www.wago.com/769-104/000-006)



**Item no.: 769-104/000-036**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/769-104/000-036](http://www.wago.com/769-104/000-036)



**Item no.: 769-104/000-037**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/769-104/000-037](http://www.wago.com/769-104/000-037)

**Item no.: 769-104/000-038**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/769-104/000-038](http://www.wago.com/769-104/000-038)

**Item no.: 769-104/000-039**  
1-conductor female plug; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/769-104/000-039](http://www.wago.com/769-104/000-039)

**Item no.: 769-104/022-000**  
1-conductor female plug; angled; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-104/022-000](http://www.wago.com/769-104/022-000)



**Item no.: 769-105**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-105](http://www.wago.com/769-105)



**Item no.: 769-105/000-006**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; blue

[www.wago.com/769-105/000-006](http://www.wago.com/769-105/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



**Item no.: 769-105/000-036**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/769-105/000-036](http://www.wago.com/769-105/000-036)

**Item no.: 769-105/000-037**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/769-105/000-037](http://www.wago.com/769-105/000-037)



**Item no.: 769-105/000-038**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/769-105/000-038](http://www.wago.com/769-105/000-038)



**Item no.: 769-105/000-039**  
1-conductor female plug; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/769-105/000-039](http://www.wago.com/769-105/000-039)



**Item no.: 769-105/022-000**  
1-conductor female plug; angled; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-105/022-000](http://www.wago.com/769-105/022-000)

**Item no.: 769-106**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-106](http://www.wago.com/769-106)



**Item no.: 769-106/000-006**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; blue

[www.wago.com/769-106/000-006](http://www.wago.com/769-106/000-006)



**Item no.: 769-106/000-036**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; gray, green-yellow

[www.wago.com/769-106/000-036](http://www.wago.com/769-106/000-036)

**Item no.: 769-106/000-037**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; green-yellow, gray

[www.wago.com/769-106/000-037](http://www.wago.com/769-106/000-037)

**Item no.: 769-106/000-038**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow

[www.wago.com/769-106/000-038](http://www.wago.com/769-106/000-038)

**Item no.: 769-106/000-039**  
1-conductor female plug; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray

[www.wago.com/769-106/000-039](http://www.wago.com/769-106/000-039)



**Item no.: 769-106/022-000**  
1-conductor female plug; angled; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; gray

[www.wago.com/769-106/022-000](http://www.wago.com/769-106/022-000)



**Item no.: 769-107**  
1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; gray












[www.wago.com/769-107](http://www.wago.com/769-107)

**Item no.: 769-107/000-006**  
1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; blue















[www.wago.com/769-107/000-006](http://www.wago.com/769-107/000-006)

Subject to changes. Please also observe the further product documentation!

















	<p><b>Item no.: 769-107/000-036</b> 1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; gray, green-yellow</p>	<a href="http://www.wago.com/769-107/000-036">www.wago.com/769-107/000-036</a>
	<p><b>Item no.: 769-107/000-037</b> 1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; green-yellow, gray</p>	<a href="http://www.wago.com/769-107/000-037">www.wago.com/769-107/000-037</a>
	<p><b>Item no.: 769-107/000-038</b> 1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-107/000-038">www.wago.com/769-107/000-038</a>
	<p><b>Item no.: 769-107/000-039</b> 1-conductor female plug; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-107/000-039">www.wago.com/769-107/000-039</a>
	<p><b>Item no.: 769-107/022-000</b> 1-conductor female plug; angled; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-107/022-000">www.wago.com/769-107/022-000</a>
	<p><b>Item no.: 769-108</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-108">www.wago.com/769-108</a>
	<p><b>Item no.: 769-108/000-006</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; blue</p>	<a href="http://www.wago.com/769-108/000-006">www.wago.com/769-108/000-006</a>
	<p><b>Item no.: 769-108/000-036</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; gray, green-yellow</p>	<a href="http://www.wago.com/769-108/000-036">www.wago.com/769-108/000-036</a>
	<p><b>Item no.: 769-108/000-037</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; green-yellow, gray</p>	<a href="http://www.wago.com/769-108/000-037">www.wago.com/769-108/000-037</a>
	<p><b>Item no.: 769-108/000-038</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-108/000-038">www.wago.com/769-108/000-038</a>
	<p><b>Item no.: 769-108/000-039</b> 1-conductor female plug; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-108/000-039">www.wago.com/769-108/000-039</a>
	<p><b>Item no.: 769-108/022-000</b> 1-conductor female plug; angled; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-108/022-000">www.wago.com/769-108/022-000</a>
	<p><b>Item no.: 769-109</b> 1-conductor female plug; 4 mm<sup>2</sup>; 9-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-109">www.wago.com/769-109</a>
	<p><b>Item no.: 769-109/000-006</b> 1-conductor female plug; 4 mm<sup>2</sup>; 9-pole; 4,00 mm<sup>2</sup>; blue</p>	<a href="http://www.wago.com/769-109/000-006">www.wago.com/769-109/000-006</a>















Subject to changes. Please also observe the further product documentation!

	<b>Item no.: 769-109/000-036</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 9-pole; 4,00 mm <sup>2</sup> ; gray, green-yellow	<a href="http://www.wago.com/769-109/000-036">www.wago.com/769-109/000-036</a>
	<b>Item no.: 769-109/000-037</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 9-pole; 4,00 mm <sup>2</sup> ; green-yellow, gray	<a href="http://www.wago.com/769-109/000-037">www.wago.com/769-109/000-037</a>
	<b>Item no.: 769-109/000-038</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 9-pole; 4,00 mm <sup>2</sup> ; gray, blue, green-yellow	<a href="http://www.wago.com/769-109/000-038">www.wago.com/769-109/000-038</a>
	<b>Item no.: 769-109/000-039</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 9-pole; 4,00 mm <sup>2</sup> ; green-yellow, blue, gray	<a href="http://www.wago.com/769-109/000-039">www.wago.com/769-109/000-039</a>
	<b>Item no.: 769-109/022-000</b> 1-conductor female plug; angled; 4 mm <sup>2</sup> ; 9-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-109/022-000">www.wago.com/769-109/022-000</a>
	<b>Item no.: 769-110</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-110">www.wago.com/769-110</a>
	<b>Item no.: 769-110/000-006</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-110/000-006">www.wago.com/769-110/000-006</a>
	<b>Item no.: 769-110/000-036</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; gray, green-yellow	<a href="http://www.wago.com/769-110/000-036">www.wago.com/769-110/000-036</a>
	<b>Item no.: 769-110/000-037</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; green-yellow, gray	<a href="http://www.wago.com/769-110/000-037">www.wago.com/769-110/000-037</a>
	<b>Item no.: 769-110/000-038</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; gray, blue, green-yellow	<a href="http://www.wago.com/769-110/000-038">www.wago.com/769-110/000-038</a>
	<b>Item no.: 769-110/000-039</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; green-yellow, blue, gray	<a href="http://www.wago.com/769-110/000-039">www.wago.com/769-110/000-039</a>
	<b>Item no.: 769-110/022-000</b> 1-conductor female plug; angled; 4 mm <sup>2</sup> ; 10-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-110/022-000">www.wago.com/769-110/022-000</a>
	<b>Item no.: 769-111</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 11-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-111">www.wago.com/769-111</a>
	<b>Item no.: 769-111/000-006</b> 1-conductor female plug; 4 mm <sup>2</sup> ; 11-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-111/000-006">www.wago.com/769-111/000-006</a>

















Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 769-111/000-036</b> 1-conductor female plug; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; gray, green-yellow</p>	<a href="http://www.wago.com/769-111/000-036">www.wago.com/769-111/000-036</a>
	<p><b>Item no.: 769-111/000-037</b> 1-conductor female plug; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; green-yellow, gray</p>	<a href="http://www.wago.com/769-111/000-037">www.wago.com/769-111/000-037</a>
	<p><b>Item no.: 769-111/000-038</b> 1-conductor female plug; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-111/000-038">www.wago.com/769-111/000-038</a>
	<p><b>Item no.: 769-111/000-039</b> 1-conductor female plug; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-111/000-039">www.wago.com/769-111/000-039</a>
	<p><b>Item no.: 769-111/022-000</b> 1-conductor female plug; angled; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-111/022-000">www.wago.com/769-111/022-000</a>
	<p><b>Item no.: 769-112</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-112">www.wago.com/769-112</a>
	<p><b>Item no.: 769-112/000-006</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; blue</p>	<a href="http://www.wago.com/769-112/000-006">www.wago.com/769-112/000-006</a>
	<p><b>Item no.: 769-112/000-036</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; gray, green-yellow</p>	<a href="http://www.wago.com/769-112/000-036">www.wago.com/769-112/000-036</a>
	<p><b>Item no.: 769-112/000-037</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; green-yellow, gray</p>	<a href="http://www.wago.com/769-112/000-037">www.wago.com/769-112/000-037</a>
	<p><b>Item no.: 769-112/000-038</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-112/000-038">www.wago.com/769-112/000-038</a>
	<p><b>Item no.: 769-112/000-039</b> 1-conductor female plug; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-112/000-039">www.wago.com/769-112/000-039</a>
	<p><b>Item no.: 769-112/022-000</b> 1-conductor female plug; angled; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-112/022-000">www.wago.com/769-112/022-000</a>
	<p><b>Item no.: 769-113</b> 1-conductor female plug; 4 mm<sup>2</sup>; 13-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-113">www.wago.com/769-113</a>
	<p><b>Item no.: 769-113/000-036</b> 1-conductor female plug; 4 mm<sup>2</sup>; 13-pole; 4,00 mm<sup>2</sup>; gray, green-yellow</p>	<a href="http://www.wago.com/769-113/000-036">www.wago.com/769-113/000-036</a>

Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 769-113/000-037</b> 1-conductor female plug; 4 mm²; 13-pole; 4,00 mm²; green-yellow, gray</p>	<a href="http://www.wago.com/769-113/000-037">www.wago.com/769-113/000-037</a>
	<p><b>Item no.: 769-113/000-038</b> 1-conductor female plug; 4 mm²; 13-pole; 4,00 mm²; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-113/000-038">www.wago.com/769-113/000-038</a>
	<p><b>Item no.: 769-113/000-039</b> 1-conductor female plug; 4 mm²; 13-pole; 4,00 mm²; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-113/000-039">www.wago.com/769-113/000-039</a>
	<p><b>Item no.: 769-113/022-000</b> 1-conductor female plug; angled; 4 mm²; 13-pole; 4,00 mm²; gray</p>	<a href="http://www.wago.com/769-113/022-000">www.wago.com/769-113/022-000</a>
	<p><b>Item no.: 769-114</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; gray</p>	<a href="http://www.wago.com/769-114">www.wago.com/769-114</a>
	<p><b>Item no.: 769-114/000-006</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; blue</p>	<a href="http://www.wago.com/769-114/000-006">www.wago.com/769-114/000-006</a>
	<p><b>Item no.: 769-114/000-036</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; gray, green-yellow</p>	<a href="http://www.wago.com/769-114/000-036">www.wago.com/769-114/000-036</a>
	<p><b>Item no.: 769-114/000-037</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; green-yellow, gray</p>	<a href="http://www.wago.com/769-114/000-037">www.wago.com/769-114/000-037</a>
	<p><b>Item no.: 769-114/000-038</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-114/000-038">www.wago.com/769-114/000-038</a>
	<p><b>Item no.: 769-114/000-039</b> 1-conductor female plug; 4 mm²; 14-pole; 4,00 mm²; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-114/000-039">www.wago.com/769-114/000-039</a>
	<p><b>Item no.: 769-114/022-000</b> 1-conductor female plug; angled; 4 mm²; 14-pole; 4,00 mm²; gray</p>	<a href="http://www.wago.com/769-114/022-000">www.wago.com/769-114/022-000</a>
	<p><b>Item no.: 769-115</b> 1-conductor female plug; 4 mm²; 15-pole; 4,00 mm²; gray</p>	<a href="http://www.wago.com/769-115">www.wago.com/769-115</a>
	<p><b>Item no.: 769-115/000-036</b> 1-conductor female plug; 4 mm²; 15-pole; 4,00 mm²; gray, green-yellow</p>	<a href="http://www.wago.com/769-115/000-036">www.wago.com/769-115/000-036</a>
	<p><b>Item no.: 769-115/000-037</b> 1-conductor female plug; 4 mm²; 15-pole; 4,00 mm²; green-yellow, gray</p>	<a href="http://www.wago.com/769-115/000-037">www.wago.com/769-115/000-037</a>

Subject to changes. Please also observe the further product documentation!

	<p><b>Item no.: 769-115/000-038</b>                  1-conductor female plug; 4 mm<sup>2</sup>; 15-pole; 4,00 mm<sup>2</sup>; gray, blue, green-yellow</p>	<a href="http://www.wago.com/769-115/000-038">www.wago.com/769-115/000-038</a>
	<p><b>Item no.: 769-115/000-039</b>                  1-conductor female plug; 4 mm<sup>2</sup>; 15-pole; 4,00 mm<sup>2</sup>; green-yellow, blue, gray</p>	<a href="http://www.wago.com/769-115/000-039">www.wago.com/769-115/000-039</a>
	<p><b>Item no.: 769-115/022-000</b>                  1-conductor female plug; angled; 4 mm<sup>2</sup>; 15-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-115/022-000">www.wago.com/769-115/022-000</a>
	<p><b>Item no.: 769-121</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-121">www.wago.com/769-121</a>
	<p><b>Item no.: 769-121/000-016</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow</p>	<a href="http://www.wago.com/769-121/000-016">www.wago.com/769-121/000-016</a>
	<p><b>Item no.: 769-122</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 2-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-122">www.wago.com/769-122</a>
	<p><b>Item no.: 769-123</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 3-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-123">www.wago.com/769-123</a>
	<p><b>Item no.: 769-124</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 4-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-124">www.wago.com/769-124</a>
	<p><b>Item no.: 769-125</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 5-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-125">www.wago.com/769-125</a>
	<p><b>Item no.: 769-126</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 6-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-126">www.wago.com/769-126</a>
	<p><b>Item no.: 769-127</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 7-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-127">www.wago.com/769-127</a>
	<p><b>Item no.: 769-128</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 8-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-128">www.wago.com/769-128</a>
	<p><b>Item no.: 769-129</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 9-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-129">www.wago.com/769-129</a>
	<p><b>Item no.: 769-130</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 10-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-130">www.wago.com/769-130</a>
	<p><b>Item no.: 769-131</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 11-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-131">www.wago.com/769-131</a>
	<p><b>Item no.: 769-132</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 12-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-132">www.wago.com/769-132</a>
	<p><b>Item no.: 769-133</b>                  2-conductor female connector; 4 mm<sup>2</sup>; 13-pole; 4,00 mm<sup>2</sup>; gray</p>	<a href="http://www.wago.com/769-133">www.wago.com/769-133</a>

Subject to changes. Please also observe the further product documentation!

**Item no.: 769-134**2-conductor female connector; 4 mm<sup>2</sup>; 14-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-134](http://www.wago.com/769-134)**Item no.: 769-135**2-conductor female connector; 4 mm<sup>2</sup>; 15-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-135](http://www.wago.com/769-135)**General accessories****Item no.: 769-438**

Pin cover; with marker slot for miniature WSB; gray

[www.wago.com/769-438](http://www.wago.com/769-438)**Item no.: 769-439**

Pin cover; with marker slot for miniature WSB; orange

[www.wago.com/769-439](http://www.wago.com/769-439)**Item no.: 769-501**Start module for 1-conductor female connector; with integrated end plate; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray [www.wago.com/769-501](http://www.wago.com/769-501)**Item no.: 769-501/000-006**Start module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-501/000-006](http://www.wago.com/769-501/000-006)**Item no.: 769-501/000-016**Start module for 1-conductor female connector; with integrated end plate; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow [www.wago.com/769-501/000-016](http://www.wago.com/769-501/000-016)**Item no.: 769-502**Center module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-502](http://www.wago.com/769-502)**Item no.: 769-502/000-006**Center module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-502/000-006](http://www.wago.com/769-502/000-006)**Item no.: 769-502/000-016**Center module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow[www.wago.com/769-502/000-016](http://www.wago.com/769-502/000-016)**Item no.: 769-503**End module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray[www.wago.com/769-503](http://www.wago.com/769-503)**Item no.: 769-503/000-006**End module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; blue[www.wago.com/769-503/000-006](http://www.wago.com/769-503/000-006)**Item no.: 769-503/000-016**End module for 1-conductor female connector; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow[www.wago.com/769-503/000-016](http://www.wago.com/769-503/000-016)**Item no.: 769-504**Start module for 2-conductor female connector; with integrated end plate; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; gray [www.wago.com/769-504](http://www.wago.com/769-504)**Item no.: 769-504/000-006**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27















32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

	Start module for 2-conductor female connector; with integrated end plate; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-504/000-006">www.wago.com/769-504/000-006</a>
	<b>Item no.: 769-504/000-016</b> Start module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; green-yellow	<a href="http://www.wago.com/769-504/000-016">www.wago.com/769-504/000-016</a>
	<b>Item no.: 769-505</b> Center module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-505">www.wago.com/769-505</a>
	<b>Item no.: 769-505/000-006</b> Center module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-505/000-006">www.wago.com/769-505/000-006</a>
	<b>Item no.: 769-505/000-016</b> Center module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; green-yellow	<a href="http://www.wago.com/769-505/000-016">www.wago.com/769-505/000-016</a>
	<b>Item no.: 769-506</b> End module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-506">www.wago.com/769-506</a>
	<b>Item no.: 769-506/000-006</b> End module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-506/000-006">www.wago.com/769-506/000-006</a>
	<b>Item no.: 769-506/000-016</b> End module for 2-conductor female connector; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; green-yellow	<a href="http://www.wago.com/769-506/000-016">www.wago.com/769-506/000-016</a>
	<b>Item no.: 769-512</b> Start module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-512">www.wago.com/769-512</a>
	<b>Item no.: 769-512/000-006</b> Start module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-512/000-006">www.wago.com/769-512/000-006</a>
	<b>Item no.: 769-512/000-016</b> Start module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; green-yellow	<a href="http://www.wago.com/769-512/000-016">www.wago.com/769-512/000-016</a>
	<b>Item no.: 769-513</b> Center module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-513">www.wago.com/769-513</a>
	<b>Item no.: 769-513/000-006</b> Center module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; blue	<a href="http://www.wago.com/769-513/000-006">www.wago.com/769-513/000-006</a>
	<b>Item no.: 769-513/000-016</b> Center module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; green-yellow	<a href="http://www.wago.com/769-513/000-016">www.wago.com/769-513/000-016</a>
	<b>Item no.: 769-515</b> End module for 1-conductor female connector; angled; 4 mm <sup>2</sup> ; 1-pole; 4,00 mm <sup>2</sup> ; gray	<a href="http://www.wago.com/769-515">www.wago.com/769-515</a>

Subject to changes. Please also observe the further product documentation!



**Item no.: 769-515/000-006**  
End module for 1-conductor female connector; angled; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; blue

[www.wago.com/769-515/000-006](http://www.wago.com/769-515/000-006)



**Item no.: 769-515/000-016**  
End module for 1-conductor female connector; angled; 4 mm<sup>2</sup>; 1-pole; 4,00 mm<sup>2</sup>; green-yellow

[www.wago.com/769-515/000-016](http://www.wago.com/769-515/000-016)

**Coding**



**Item no.: 769-435**  
Coding pin; for coding of female plugs; for carrier terminal blocks / male connectors; orange

[www.wago.com/769-435](http://www.wago.com/769-435)

**tools**



**Item no.: 210-720**  
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft

[www.wago.com/210-720](http://www.wago.com/210-720)

**Carrier rail**



**Item no.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm

[www.wago.com/210-112](http://www.wago.com/210-112)

**Item no.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-113](http://www.wago.com/210-113)

**Item no.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715

[www.wago.com/210-114](http://www.wago.com/210-114)

**Item no.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm

[www.wago.com/210-115](http://www.wago.com/210-115)

**Item no.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715

[www.wago.com/210-118](http://www.wago.com/210-118)

**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)



**Item no.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715

[www.wago.com/210-197](http://www.wago.com/210-197)



**Item no.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)



**Item no.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715

[www.wago.com/210-504](http://www.wago.com/210-504)

**Item no.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715

[www.wago.com/210-505](http://www.wago.com/210-505)

**Item no.: 210-506**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715

[www.wago.com/210-506](http://www.wago.com/210-506)

Subject to changes. Please also observe the further product documentation!





Item no.: 210-508

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715

[www.wago.com/210-508](http://www.wago.com/210-508)

## Downloads

### Documentation

#### Additional Information

Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

## CAD/CAE-Data

### CAD data

2D/3D Models 769-208/281-410	URL	Download
------------------------------	-----	----------


### CAE data

EPLAN Data Portal 769-208/281-410	URL	Download
-----------------------------------	-----	----------


WSCAD Universe 769-208/281-410	URL	Download
--------------------------------	-----	----------

## Installation Notes

### Assembly

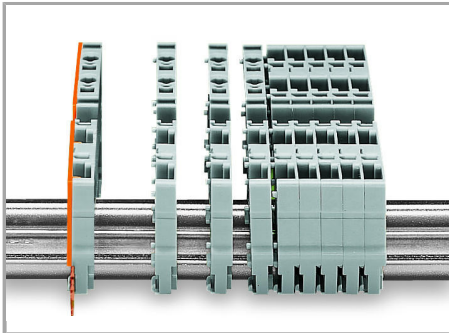


Snap individual carrier terminal blocks onto the carrier rail and slide together.

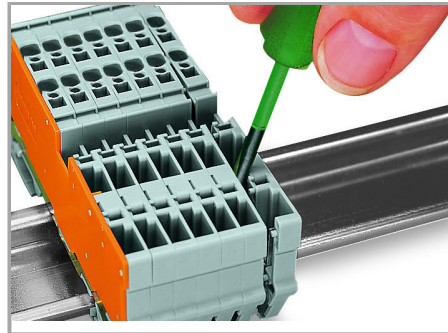


Open the assembly by laterally sliding a block via operating tool and remove terminal block via release lever.

### Jumpered


Subject to changes. Please also observe the further product documentation!

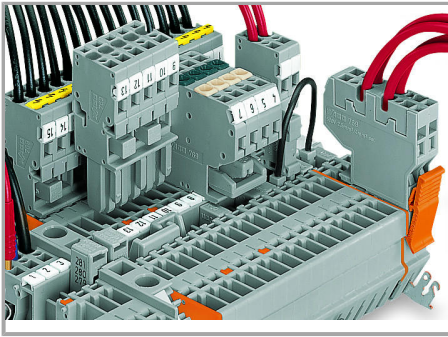

Commoning with adjacent or staggered jumpers –

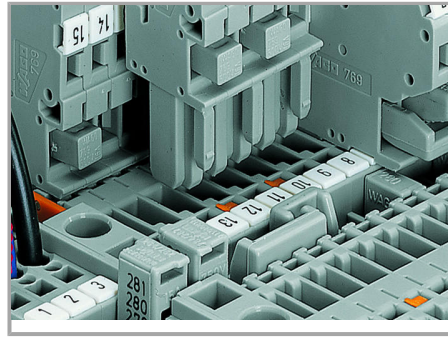


Commoning carrier terminal blocks via staggered jumpers.

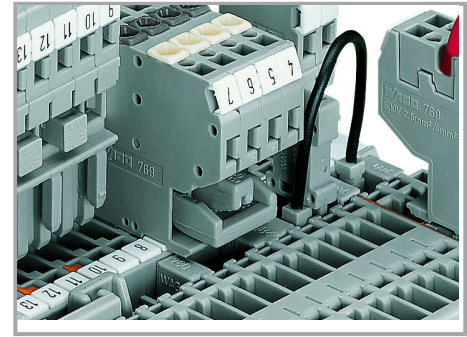


Commoning a 2-conductor female plug via staggered jumper and carrier terminal blocks via adjacent jumpers.

push jumpers down until fully inserted.

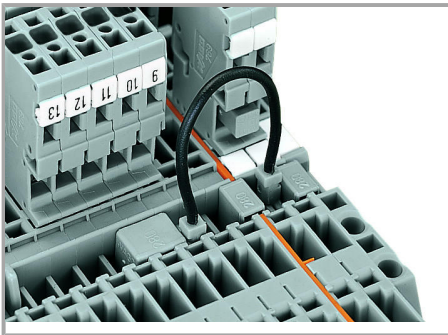


Commoning carrier terminal blocks via push-in type wire jumpers or adjacent jumpers – even over an intermediate plate.

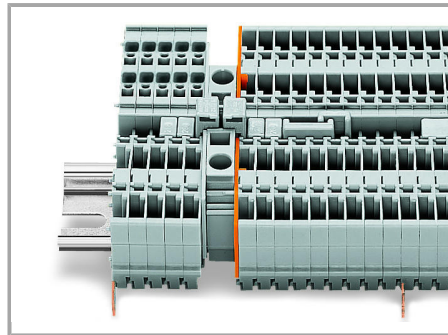

Commoning "supply terminal blocks" (up to 10 mm<sup>2</sup>/8 AWG) with carrier terminal blocks via step-down jumpers.


### Testing

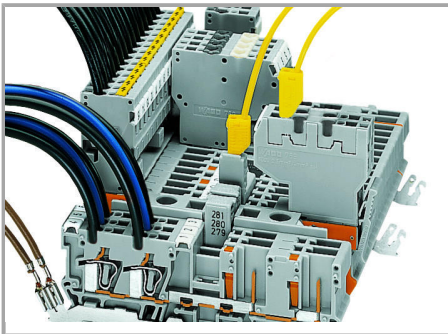

Testing via 2 or 2.3 mm Ø test plugs.

Subject to changes. Please also observe the further product documentation!


### Coding

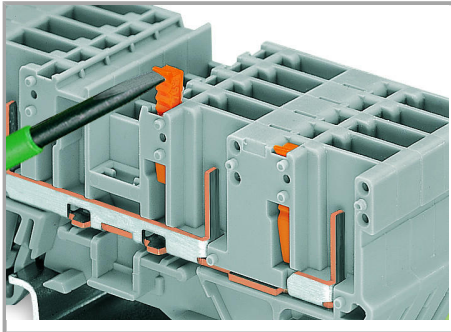

Snap coding pin in proper direction on carrier terminal block.

Shown: Coding pin removal from carrier terminal block.

### Locking

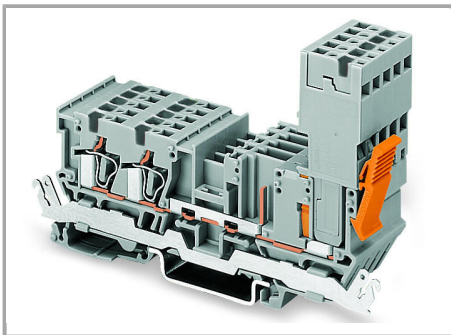

Female plug secured with locking lever on the terminal block side.

### Product family

#### X-COM

[Learn more about the product family.](#)

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!