



Moulded Case Switch 4p 1200A 1000VDC UL

Part no. N4-4-1200-S1-PV-NA
Article no. 179327

Delivery program

Product range			Switch-disconnectors
Protective function			Disconnectors/main switches Photovoltaic applications
Product range			DC switch-disconnectors
Application field			Utility buildings Open areas
Part no.			N...PV-NA
Standard/Approval			UL489B IEC 60947-3 CE CCC
Rated operational voltage			1000
Installation type			Fixed
Construction size			N4
Description			<p>Main switch characteristics including positive drive to IEC/EN 60204 and VDE 0113. Isolating characteristics to IEC/EN 60947-3 and VDE 0660.</p> <p>N switch-disconnectors can, in addition, be combined with NZM...-XU, NZM...-XA shunt releases and auxiliary contacts as well as with NZM...-XR... remote operator. For DC switching, all 4 contacts must be connected in series. Refer to the information on jumper kit accessories.</p> <p>When working with ungrounded systems (e.g., IT), the installation must ensure that a double ground fault will be impossible.</p> <p>Switch can not be combined with plug-in/withdrawable units and/or connection on rear.</p> <p>Within the scope of application for UL489B, the switch cannot be combined with connection width extensions, module plates, or band terminals either.</p> <p>N4-4...-S15-DC feeder unit and outgoer from the bottom only.</p> <p>Suitable for 100%-rated application together with an enclosure with minimum dimensions of 1200 x 600 x 275 mm (WxHxD).</p> <p>Does not provide any overcurrent protection.</p>
Connection options			
Number of poles			4-pole basic device, usable in a 1-pole or 2-pole configuration depending on the type of connection
Standard equipment			Screw connection
Switch positions			I, +, 0
Rated current = rated uninterrupted current	$I_n = I_u$	A	1200
Remotely control / trip			Optionally with XR remote operator/Can be optionally controlled remotely with XU/XA shunt release

Rated operating frequency		DC
---------------------------	--	----

Technical data

Switch-disconnectors

Rated operational voltage, max.	U _e	V DC	1000
Rated uninterrupted current with terminal jumpers			
at 40°			1200
at 65°			1200
			Values for rated uninterrupted current at 65 °C include jumpers.
Utilization category			DC22A
Rated operational current	I _e	A	
DC 22-A	I _e	A	1200
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U _i	V	1250
Ambient temperature			
Ambient temperature, storage		°C	- 40 - + 70
Operation		°C	-25 - +70

Rated short-time withstand current

t = 0.1 s		kA	34
-----------	--	----	----

Lifespan, mechanical

Max. operating frequency		Ops/h	60
Lifespan, mechanical	Operations		10000
			Lifespan, mechanical: of which max. 50 % trip by shunt/undervoltage release

Lifespan, electrical

Electrical	Operations		500
------------	------------	--	-----

Terminal capacity

Standard equipment			Screw connection
Round copper conductor			
Tunnel terminal			
Stranded		mm ²	
4-hole		mm ²	4 x (50 - 240)
Bolt terminals			
Direct on the switch			
Stranded		mm ²	1 x (120 - 185) 4 x (50 - 185)
Module plate			
Single hole	min.	mm ²	1 x (120 - 300)
Single hole	max.	mm ²	2 x (95 - 300)
Module plate			
Double hole	min.	mm ²	2 x (95 - 185)
Double hole	max.	mm ²	4 x (35 - 185)
Connection width extension		mm ²	
Connection width extension		mm ²	4 x 300 6 x (95 - 240)
Al conductors, Cu cable			
Stranded		mm ²	
4-hole		mm ²	4 x (25 - 240)
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	(2x) 10 x 50 x 1.0
Flat copper strip, with holes	max.	mm	(2x) 10 x 50 x 1.0
Connection width extension		mm	(2x) 10 x 80 x 1,0
Cu strip (number of segments x width x segment thickness)			
Flat conductor terminal	min.	mm	6 x 16 x 0.8

	max.	mm	(2x) 10 x 32 x 1.0
Module plate			
Single hole		mm	(2x) 10 x 50 x 1,0
Bolt terminal and rear-side connection			
Flat copper strip, with holes	min.	mm	(2x) 10 x 50 x 1.0
Flat copper strip, with holes	max.	mm	(2x) 10 x 50 x 1.0
Connection width extension		mm	(2x) 10 x 80 x 1,0
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M10
Direct on the switch			
	min.	mm	20 x 5
	max.	mm	2 x (50 x 10) 2 x (80 x 10)
Module plate			
Single hole	min.	mm	25 x 5
Single hole	max.	mm	2 x (50 x 10)
Module plate			
Double hole		mm	2 x (50 x 10)
Connection width extension		mm	
Connection width extension	min.	mm	60 x 10
Connection width extension	max.	mm	2 x (10 x 80)

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	1200
Equipment heat dissipation, current-dependent	P _{vid}	W	163
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnecter (ec@ss8.1-27-37-14-03 [AKF060010])			
Version as main switch			Yes
Version as maintenance-/service switch			Yes
Version as safety switch			No
Version as emergency stop installation			Yes
Version as reversing switch			No
Max. rated operation voltage Ue AC	V		0
Rated operating voltage	V		1000 - 1000
Rated permanent current Iu	A		1200
Rated permanent current at AC-21, 400 V	A		0
Rated operation power at AC-3, 400 V	kW		0
Rated short-time withstand current Icw	kA		34
Rated operation power at AC-23, 400 V	kW		0
Switching power at 400 V	kW		0
Conditioned rated short-circuit current Iq	kA		0
Number of poles			4
Number of auxiliary contacts as normally closed contact			0
Number of auxiliary contacts as normally open contact			0
Number of auxiliary contacts as change-over contact			0
Motor drive optional			Yes
Motor drive integrated			No
Voltage release optional			Yes
Device construction			Built-in device fixed built-in technique
Suitable for ground mounting			Yes
Suitable for front mounting 4-hole			No
Suitable for front mounting center			No
Suitable for distribution board installation			Yes
Suitable for intermediate mounting			Yes
Colour control element			Black
Type of control element			Rocker lever
Interlockable			Yes
Type of electrical connection of main circuit			Screw connection
Degree of protection (IP), front side			IP20

Approvals

Product Standards			UL 489B; IEC 60947-3; CE marking; CCC
UL File No.			E471671
CSA File No.			-
CSA Class No.			-
North America Certification			UL listed
Specially designed for North America			No
Suitable for			Feeder circuits, branch circuits
Current Limiting Circuit-Breaker			No
Max. Voltage Rating			1000 VDC
Degree of Protection			IEC: IP20; UL/CSA Type: -

Dimensions

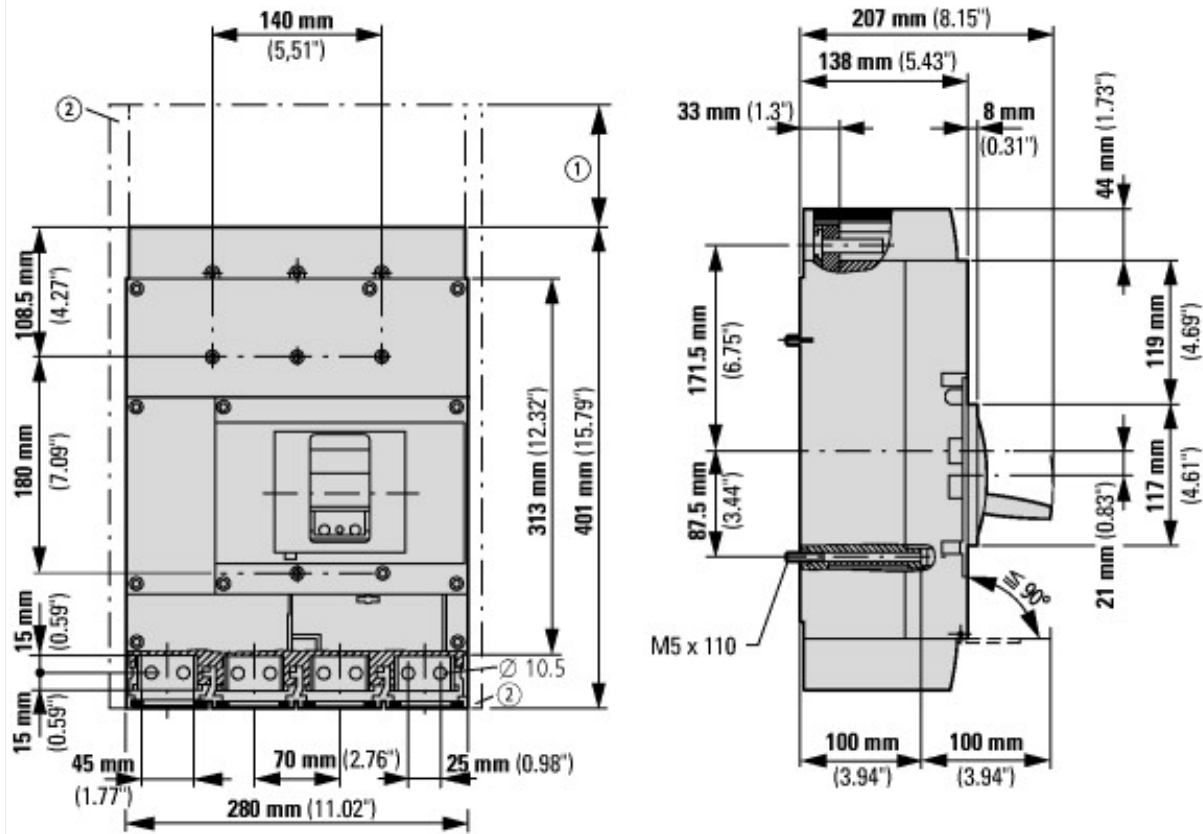

- ① Blow out area, minimum clearance to other parts \equiv 260 mm
- ② Minimum clearance to adjacent parts \equiv 15 mm

Additional product information (links)

IL012055ZU Switch-disconnector 1000 V DC, 1500 V DC for North America

IL012055ZU Switch-disconnector 1000 V DC, 1500 V DC for North America	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL012055ZU2015_07.pdf
CurveSelect characteristics program	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm
Eaton configurator	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm
Additional technical data: Photovoltaics catalog (starting on page 35)	http://www.moeller.net/binary/pdf_kat/br01601001z_en.pdf