



Timer module, 200-240VAC, 5-100s, off-delayed

Part no. DILM32-XTED11-100(RAC240)
Article no. 104948
Catalog No. XTCEXTED100C11B

Delivery program

Product range			Accessories
Accessories			Timer modules
Description			Off-delayed, auxiliary voltage-free Cannot be combined with top mounting auxiliary contacts Incl. suppressor circuits
Voltage range	U_{LN}	V	200 - 240 V AC
Time range			5 - 100 s
For use with			DILM7 - DILM32 DILMP20 DILMP32-DILMP45 DILA
Contact sequence			

Technical data

General

Standards			DIN EN 61812, IEC/EN 60947, VDE 0660, UL, CSA
Lifespan, mechanical			
AC operated	Operations	$\times 10^6$	3
DC operated	Operations	$\times 10^6$	3
Ambient temperature			
Storage		°C	- 40 - 80
Open		°C	-25 - +60
Enclosed		°C	- 25 - 40
Mounting position			As required, except suspended
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock, 10 ms			
N/O contact		g	6
N/C contact		g	6
Degree of Protection			IP20
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Weight		kg	0.08
Terminal capacities		mm^2	
Solid		mm^2	1 x (0.75 - 2.5) 2 x (0.75 - 1.5)
Flexible with ferrule		mm^2	1 x (0.75 - 1.5) 2 x (0.75 - 1.5)
Solid or stranded		AWG	18 - 14
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	0.8 x 5.5 1 x 6
Max. tightening torque		Nm	1.2

Contacts

Rated impulse withstand voltage	U_{imp}	V AC	4000
Overvoltage category/pollution degree			III/3
Rated insulation voltage	U_i	V AC	250
Rated operational voltage	U_e	V	250
Safe isolation to EN 61140			
between coil and auxiliary contacts		V AC	250
between the auxiliary contacts		V AC	250

Short-circuit rating without welding				
max. fuse		A gG/gL	6	
Magnet systems				
Voltage tolerance				
Pick-up voltage		x U _s		
AC operated		V AC		
	Pick-up	x U _c	0.85 - 1.1	
DC operated	Pick-up	x U _c		
	Pick-up	x U _c	0.7 - 1.2	
Power consumption				
60 °C	Sealing	VA	2	
AC operated	Sealing	W	1.8	
duty factor		% DF	100	
Maximum operating frequency				
Max. operating frequency		Ops./h	3600	
Can be combined with auxiliary contact		Ops./h	360	
Conventional thermal current I _{th} = I _e AC-1				
On-delayed		ms	< 50	
Off-delayed		ms	< 200	
AC operated 50 Hz	Deviation	%	< 5	
Recovery time (after 100% time delay)				
		ms	70	
contact changeover time				
DILM32-XTEE11/DILM32-XTED11	t _u	ms	10	
DILM32-XTEY20	t _u	ms	50	

Notes

Notes For rated operational current: Making and breaking conditions to DC-13, L/R constant as stated
Max. fuses for short-circuit protection: Transparent overlay "Fuses" for time/current characteristics (please enquire)
For pick-up voltage, DC operated: Pure DC, AC bridge rectifier or smoothed double-wave rectification.

Design verification as per IEC/EN 61439

Technical data for design verification				
Rated operational current for specified heat dissipation	I _n	A	0	
Heat dissipation per pole, current-dependent	P _{vid}	W	0	
Equipment heat dissipation, current-dependent	P _{vid}	W	0	
Static heat dissipation, non-current-dependent	P _{vs}	W	1.8	
Heat dissipation capacity	P _{diss}	W	0	
Operating ambient temperature min.		°C	-25	
Operating ambient temperature max.		°C	60	
IEC/EN 61439 design verification				
10.2 Strength of materials and parts				
10.2.2 Corrosion resistance				Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures				Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat				Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects				Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation				Meets the product standard's requirements.
10.2.5 Lifting				Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact				Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions				Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES				Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances				Meets the product standard's requirements.
10.5 Protection against electric shock				Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components				Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections				Is the panel builder's responsibility.
10.8 Connections for external conductors				Is the panel builder's responsibility.
10.9 Insulation properties				

10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 6.0

Relays (EG000019) / Timer block (EC002060)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Timer block attachment (ecl@ss8.1-27-37-13-08 [ACN996008])		
Switching function		Time-delay dropped out
Setting time	s	5 - 100
Number of contacts as normally open contact		1
Number of contacts as normally closed contact		1
Number of contacts as change-over contact		0
Operating principle		Electronic

Approvals

Product Standards		IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking
UL File No.		E29184
UL Category Control No.		NKCR
CSA File No.		012528
CSA Class No.		3211-03
North America Certification		UL listed, CSA certified

Dimensions

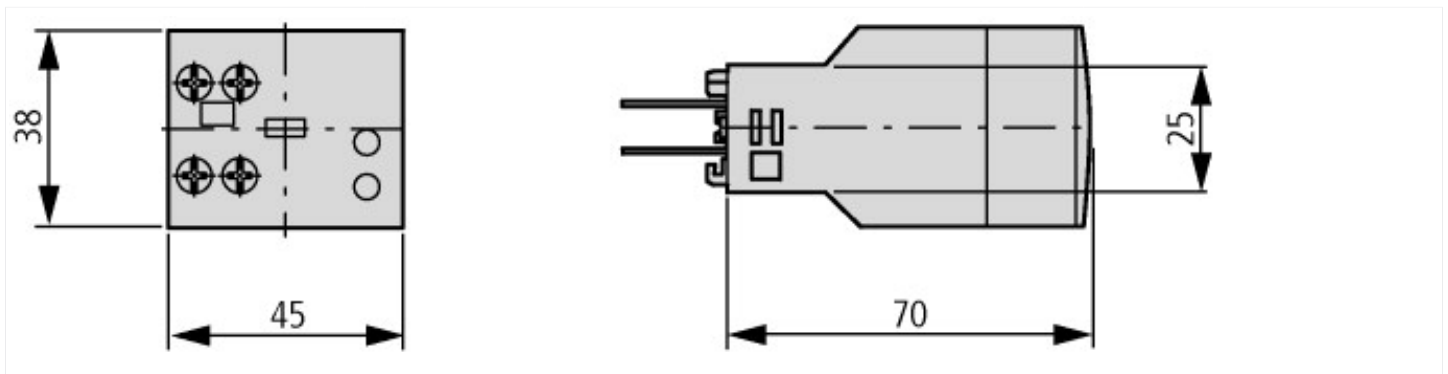

Additional product information (links)

IL04910004Z (AWA2527-2320) Electronical timer	
IL04910004Z (AWA2527-2320) Electronical timer	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04910004Z2010_10.pdf
Switchgear of Power Factor Correction Systems	http://www.moeller.net/binary/ver_techpapers/ver934en.pdf
X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely	http://www.moeller.net/binary/ver_techpapers/ver938en.pdf
Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions	http://www.moeller.net/binary/ver_techpapers/ver944en.pdf
Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors	http://www.moeller.net/binary/ver_techpapers/ver949en.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.moeller.net/binary/ver_techpapers/ver953en.pdf
Switchgear for Luminaires	http://www.moeller.net/binary/ver_techpapers/ver955en.pdf
Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts	http://www.moeller.net/binary/ver_techpapers/ver956en.pdf

The Interaction of Contactors with PLCs	http://www.moeller.net/binary/ver_techpapers/ver957en.pdf
Busbar Component Adapters for modern Industrial control panels	http://www.moeller.net/binary/ver_techpapers/ver960en.pdf