



**Fuse-link, D01, 6A, 400 V, gL/gG**

**Part no. Z-D01/SE-6**  
**Article no. 288936**

Similar to illustration

## Delivery program

Product range			Fuse material
Basic function			Accessories
Basic function			Fuse links
Utilization category			Utilization category gG (gL)
			Snap-fit on DIN rail in a plastic box in the colour of the indicator
Rated uninterrupted current	$I_u$	A	6
Fuse cartridge		Size	D01

## Technical data

### General

Standards			DIN VDE 0636, DIN 49522
-----------	--	--	----------------------------

### Electrical

Rated operational voltage	$U_e$	V	
Rated operating voltage	$U_e$	V AC	400
		V DC	220
Rated uninterrupted current	$I_u$	A	6


## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	6
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0
Equipment heat dissipation, current-dependent	$P_{vid}$	W	1.2
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
			0


## Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642)			
Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ec1@ss8.1-27-14-21-19 [ACN353008])			
Construction size			D01
Nominal rated current		A	6
Nominal rated voltage		V	400
Colour code			Green
Utilization category			gL/gG (cable protection/equipment protection)

## Characteristics

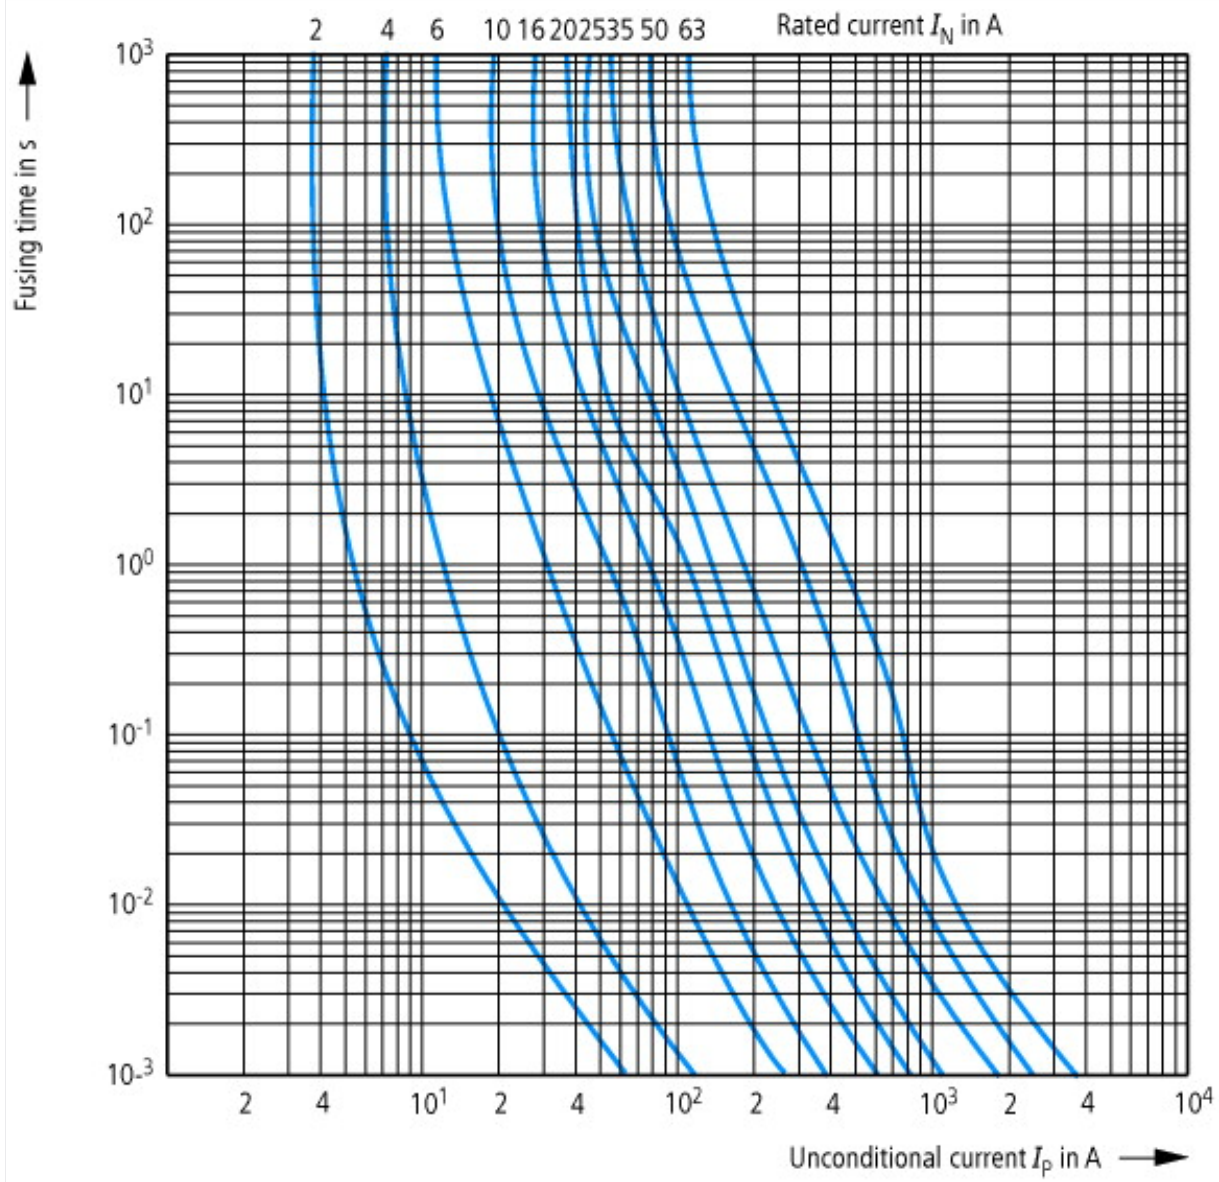

Let-through current characteristic curve

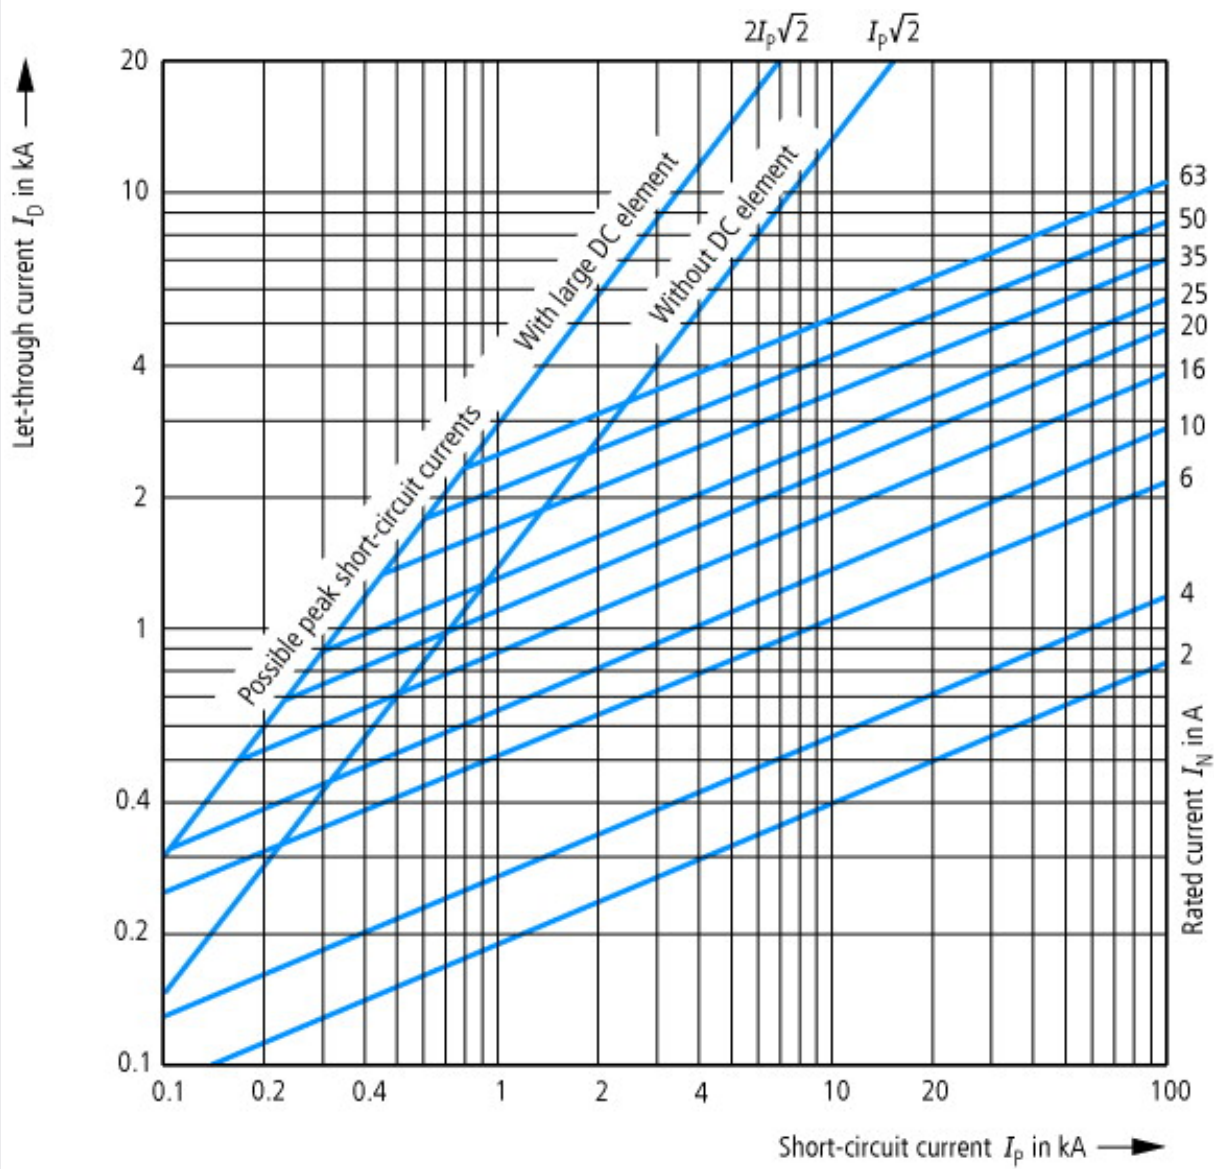

Let-through current characteristic curve