

SAK Series
SAKT 1/LT STB14/4**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

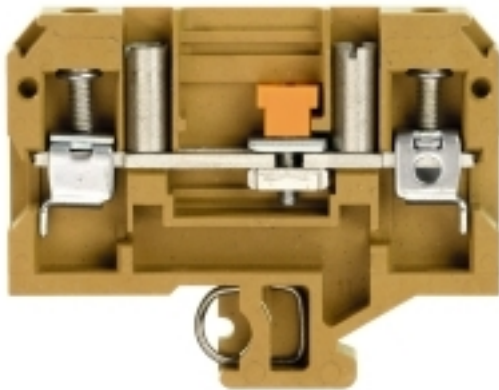Product image**Klippon® Connect with clamping yoke Technology**

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	SAKT 1/LT STB14/4
Order No.	0437920000
Version	SAK Series, Test-disconnect terminal, Rated cross-section: 6 mm², Screw connection, medium yellow, Direct mounting
GTIN (EAN)	4008190163549
Qty.	50 pc(s).

SAK Series
SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	8 mm	Width (inches)	0.315 inch
Height	65 mm	Height (inches)	2.559 inch
Depth	52.5 mm	Depth (inches)	2.067 inch
Net weight	30.24 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-60 °C
Continuous operating temp., max.	130 °C		

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Material data

Material	KrG	Colour	medium yellow
UL 94 flammability rating	V-0, 5VA		

System specifications

Version	Screw connection, Special terminal longitudinal isolator, With sockets, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
Number of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Rail	TS 32	N-function	No
PE function	No	PEN function	No

Additional technical data

Explosion-tested version	No	Installation advice	Direct mounting
Number of similar terminals	1	Open sides	right
Type of mounting	Snap-on		

SAK Series
SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Conductors for clamping (rated connection)**

Blade size	4.0 x 0.8 mm	Clamping range, max.	10 mm ²
Clamping range, min.	0.13 mm ²	Clamping screw	M 3.5
Connection cross-section, stranded, max.	10 mm ²	Connection cross-section, stranded, min.	1.5 mm ²
Connection direction	on side	Gauge to IEC 60947-1	A5
Number of connections	2	Stripping length	12 mm
Tightening torque, max.	1.6 Nm	Tightening torque, min.	0.8 Nm
Torque level with DMS electric screwdriver	3	Type of connection	Screw connection
Wire connection cross section AWG, max.	AWG 8	Wire connection cross section AWG, min.	AWG 26
Wire connection cross section, finely stranded, max.	6 mm ²	Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, max.	6 mm ²
Wire connection cross-section, finely stranded with wire-end ferrules DIN 46228/1, min.	0.5 mm ²	Wire connection cross-section, finely stranded, min.	0.5 mm ²
Wire connection cross-section, solid core, max.	10 mm ²	Wire connection cross-section, solid core, min.	0.5 mm ²

Disconnect terminals

Cross-disconnect	without	Integral test socket	Yes
Slitting	sliding		

Rating data

Rated cross-section	6 mm ²	Rated voltage	400 V
Rated current	41 A	Current at maximum wires	57 A
Standards	IEC 60947-7-1	Volume resistance according to IEC 60947-7-x	0.78 mΩ
Power loss in accordance with IEC 60947-7-x	1.31 W	Rated impulse withstand voltage	6 kV
Pollution severity	3		

Classifications

ETIM 6.0	EC000902	ETIM 7.0	EC000902
eClass 9.0	27-14-11-26	eClass 9.1	27-14-11-26
eClass 10.0	27-14-11-26	UNSPSC	30-21-18-11

Approvals

Approvals



ROHS

Conform

Downloads

Approval/Certificate/Document of Conformity	DE_PT1344_20160418_621_ISSUE01.pdf
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks

Creation date April 30, 2020 11:40:12 PM CEST

SAK Series **SAKT 1/LT STB14/4**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data

Safety note

Safety notice

[Safety Information](#)

SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

QL / SAK 6N



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	QL 4 SAK6N	Version
Order No.	0194500000	SAK Series, Cross-connector, for cross-connection link, Number of
GTIN (EAN)	4008190025601	poles: 4
Qty.	50 pc(s).	
Type	QL 2 SAK6N	Version
Order No.	0194300000	SAK Series, Cross-connector, for cross-connection link, Number of
GTIN (EAN)	4008190182854	poles: 2
Qty.	50 pc(s).	
Type	QL 10 SAK6N	Version
Order No.	0338300000	SAK Series, Cross-connector, for cross-connection link, Number of
GTIN (EAN)	4008190176679	poles: 10
Qty.	20 pc(s).	
Type	QL 15 SAK6N	Version
Order No.	0221200000	SAK Series, Cross-connector, for cross-connection link, Number of
GTIN (EAN)	4008190042110	poles: 15
Qty.	10 pc(s).	
Type	QL 3 SAK6N	Version
Order No.	0194400000	SAK Series, Cross-connector, for cross-connection link, Number of
GTIN (EAN)	4008190063351	poles: 3
Qty.	50 pc(s).	


SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Blank



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	DEK 5/6.5 MC NE WS	Version
Order No.	1609840000	Dekafix, Terminal marker, 5 x 6.5 mm, Pitch in mm (P): 6.50
GTIN (EAN)	4008190203429	Weidmueller, white
Qty.	900 pc(s).	

End bracket



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	EWK 1	Version
Order No.	0206160000	Accessories, End bracket
GTIN (EAN)	4008190080020	
Qty.	50 pc(s).	

Type	EW 15	Version
Order No.	0382860000	Accessories, End bracket
GTIN (EAN)	4008190187804	
Qty.	50 pc(s).	

Type	EW 15/2	Version
Order No.	1071900000	Accessories, End bracket
GTIN (EAN)	4008190462949	
Qty.	50 pc(s).	

SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Accessories

Type	EW 35/SCHA/M3	Version
Order No.	0258660000	Accessories, End bracket
GTIN (EAN)	4008190033477	
Qty.	20 pc(s).	
Type	EWK 2	Version
Order No.	0199360000	Accessories, End bracket
GTIN (EAN)	4008190023546	
Qty.	50 pc(s).	
Type	EW 35	Version
Order No.	0383560000	Accessories, End bracket
GTIN (EAN)	4008190181314	
Qty.	50 pc(s).	
Type	EW 35 GR 7032	Version
Order No.	0383530000	Accessories, End bracket
GTIN (EAN)	4008190027322	
Qty.	50 pc(s).	
Type	EWK 1 ALT	Version
Order No.	0495160000	Accessories, End bracket
GTIN (EAN)	4008190160777	
Qty.	50 pc(s).	
Type	WEW 32/1	Version
Order No.	1067600000	W-Series, End bracket
GTIN (EAN)	4008190099657	
Qty.	50 pc(s).	

Test plug



Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	PS 4 F.STB 4	Version
Order No.	0299600000	Accessories, Test plug
GTIN (EAN)	4008190074043	
Qty.	20 pc(s).	

SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Shorting plug



Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	QS 2/8/4	Version
Order No.	0270960000	SAK Series, Short-circuit plug, For the terminals, Number of poles: 2
GTIN (EAN)	4008190077006	
Qty.	20 pc(s).	

End brackets



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	WEW 35/1	Version
Order No.	1059000000	W-Series, End bracket
GTIN (EAN)	4008190172282	
Qty.	50 pc(s).	
Type	WEW 35/2	Version
Order No.	1061200000	W-Series, End bracket
GTIN (EAN)	4008190030230	
Qty.	100 pc(s).	

SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Fixing screws




Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	BS 25 IH/SW SAKT1	Version
Order No.	0335200000	SAK Series, Set of fixings
GTIN (EAN)	4008190114039	
Qty.	50 pc(s).	
Type	BS 25 IH/RT SAKT1	Version
Order No.	0335500000	SAK Series, Set of fixings
GTIN (EAN)	4008190118877	
Qty.	50 pc(s).	
Type	BS 25 IH/GR SAKT1	Version
Order No.	0335300000	SAK Series, Set of fixings
GTIN (EAN)	4008190136864	
Qty.	50 pc(s).	
Type	BS 25 IH/GE SAKT1	Version
Order No.	0335700000	SAK Series, Set of fixings
GTIN (EAN)	4008190189235	
Qty.	50 pc(s).	

End brackets



Spring connection with tension clamp Technology

Tension clamp technology is a universal contact system for all common conductor connection types. Its fantastic level of flexibility makes the tension clamp a profitable alternative connection.

General ordering data

Type	ZEW 35/2	Version
Order No.	8630740000	Z-series, End bracket
GTIN (EAN)	4032248348916	
Qty.	20 pc(s).	
Type	ZEW 15	Version
Order No.	7920340000	Accessories, End bracket
GTIN (EAN)	4032248238910	
Qty.	20 pc(s).	


SAK Series SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Type	ZEW 35	Version
Order No.	9540000000	Z-series, End bracket
GTIN (EAN)	4008190956264	
Qty.	20 pc(s).	

SchT group marker carrier



The SchT 5 S group tag carriers are clipped directly onto the TS 32 mounting rail (G-rail) or the TS 35 mounting rail (top-hat rail). It is therefore possible to label the terminal strip irrespective of the terminal and the type of terminal. SchT 5 and SchT 5 S are fitted with ESO 5, STR 5 protective strips.

The SchT 7 is a hinged group tag carrier for inlay tags which enables easy access to the clamping screw. The SchT 7 is fitted with ESO 7, STR 7 protective strips or DEK 5.

SchT 9/4 and SchT 14/6 are hinged group tag carriers for single dekafix and WS tags that enable easy access to the clamping screw.

SchT 9/4 and SchT 14/6 are fitted with WS or DEK.

Inlay tags and protective strips can be found under "Accessories".

General ordering data

Type	SCHT 7	Version
Order No.	0517960000	SCHT, Terminal marker, 39.3 x 8 mm, Pitch in mm (P): 7.00
GTIN (EAN)	4008190001742	Weidmueller, white
Qty.	20 pc(s).	

End plates



Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	TW SAKB/C/T1	Version
Order No.	0242960000	SAK Series, Separation plate, 1.5 mm, beige, Direct mounting
GTIN (EAN)	4008190104092	
Qty.	20 pc(s).	
Type	AP SAKB/C/T KRG	Version
Order No.	0146720000	SAK Series, End plate, 3 mm, dark beige, yellow, Direct mounting
GTIN (EAN)	4008190027995	
Qty.	20 pc(s).	

SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Accessories

Shorting link



Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	QVS 2/S SAKT1+2	Version
Order No.	0358460000	SAK Series, Cross-connector, Cross-connector, Number of poles: 2
GTIN (EAN)	4008190157937	
Qty.	20 pc(s).	

Type	QVS 3 SAKT1+2	Version
Order No.	0329300000	SAK Series, Cross-connector, Cross-connector, Number of poles: 3
GTIN (EAN)	4008190084714	
Qty.	20 pc(s).	

Type	QVS 2 SAKT1+2	Version
Order No.	0307300000	SAK Series, Cross-connector, Cross-connector, Number of poles: 2
GTIN (EAN)	4008190036140	
Qty.	20 pc(s).	

Switch lock



Current and voltage transformer wiring

Our test disconnect terminal blocks featuring spring and screw connection technology allow you to create all the important converter circuits for measuring current, voltage and power in a safe and sophisticated way.

General ordering data

Type	SSP 3 SAKT1	Version
Order No.	0531760000	SAK Series, Lockout device
GTIN (EAN)	4008190130787	
Qty.	100 pc(s).	


SAK Series

SAKT 1/LT STB14/4

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Accessories

Custom printing



The Dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a wide range of ready-printed markers.

Strips for fast installation in only one work step. The printing is easy to read, rich in contrast and available in various widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Terminal markers, suitable for all Weidmüller cable connectors
- Available as blank MultiCard or with standard printing

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

General ordering data

Type	DEK 5/6.5 MC SDR	Version
Order No.	1609850000	Dekafix, Terminal marker, 5 x 6.5 mm, Pitch in mm (P): 6.50
GTIN (EAN)	4008190456610	Weidmueller, To customer specification
Qty.	180 pc(s).	

Connection sleeves



VH 12/4.9/3.3 024900

Klippon® Connect with clamping yoke Technology

The high reliability and variety of designs of the terminal blocks with clamping yoke connections make planning easier and optimises operational safety. Klippon® Connect provides a proven response to a range of different requirements.

General ordering data

Type	VH 12/4.9/3.3 SAK6N	Version
Order No.	0249000000	SAK Series, Connecting sleeve, for cross-connection link, Number of poles:
GTIN (EAN)	4008190129507	
Qty.	100 pc(s).	

Type	VH 19/6/4.2 SAKT1	Version
Order No.	0318000000	SAK Series, Connecting sleeve, for cross-connection link, Number of poles: 1
GTIN (EAN)	4008190059460	
Qty.	50 pc(s).	